

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0878580550](#)  
**Status:** **Active**  
**Overview:** Milli-Grid Connector System  
**Description:** 2.00mm Pitch Milli-Grid Breakaway Header, Surface Mount, Single Row, Parallel, 2.54µm Tin (Sn) Plating, without Peg, with Pick-and-Place Polyimide Tape, Mating Pin Length 3.20mm , 5 Circuits, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification 503940001-AS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-87858-300-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 877610000-TS-000 (PDF)</a>
<a href="#">Product Specification PS-87761-100-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


UL E29179

**General**

Product Family	PCB Headers
Series	<a href="#">87858</a>
Application	Signal, Wire-to-Board
Overview	<a href="#">Milli-Grid Connector System</a>
Product Name	Milli-Grid
Taxonomy	PCB Headers and Receptacles
UPC	883906047832

**Physical**

Breakaway	Yes
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	3.20mm
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.143/g
Number of Rows	1
Orientation	Parallel
PC Tail Length	2.80mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	2.540µm
Polarized to Mating Part	No
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Temperature Range - Operating	-55° to +105°C

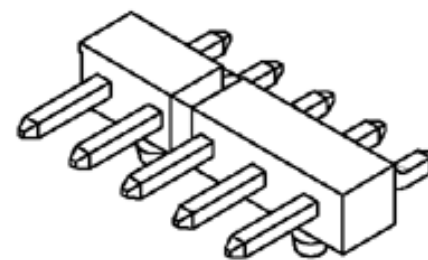

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[87858](#) Series

**Mates With**

2.00mm Single Row Receptacles

Termination Interface: Style Surface Mount

**Electrical**

Current - Maximum per Contact 2.0A  
Voltage - Maximum 125V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 010  
Lead-freeProcess Capability REFLOW  
Max. Cycles at Max. Process Temperature 003  
Process Temperature max. C 260

**Material Info**

**Reference - Drawing Numbers**

Application Specification 503940001-AS-000  
Packaging Specification PK-87858-300-000  
Product Specification PS-87761-100-001  
Sales Drawing SD-87858-022-001  
Test Summary 877610000-TS-000

This document was generated on 09/26/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**