

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0039303043

Status:

Active

Overview:

Mini-Fit Family Power Connectors

Description:

Mini-Fit Jr. Header, Single Row, Right-Angle, with PCB Mounting Flanges, 4 Circuits, PA Polyamide Nylon 6/6, 94V-2, (Au) Plating

Documents:

3D Model (PDF)

Application Specification AS-5557-001-001 (PDF)

Drawing (PDF)

Packaging Specification PK-5569-002-001 (PDF)

3D Model

Test Summary TS-5556-002-001 (PDF)

Product Specification PS-45750-001-001 (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-5556-001-001 (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

5569

Application

Power, Wire-to-Board

Comments

Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex Product specification PS-5556-001 for additional current de-rating information.

Overview

Mini-Fit Family Power Connectors

Product Name

Mini-Fit Jr.

Taxonomy

PCB Headers and Receptacles

UPC

800753926677

Physical

Breakaway

No

Circuits (Loaded)

4

Circuits (maximum)

4

Color - Resin

Natural

Durability (mating cycles max)

30

First Mate / Last Break

No

Flammability

94V-2

Glow-Wire Capable

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

Yes

Material - Metal

Brass

Material - Plating Mating

Gold

Material - Plating Termination

Matte Tin

Material - Resin

Nylon

Net Weight

1.736/g

Number of Rows

1

Orientation

Right Angle

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.78mm

Packaging Type

Bag

Pitch - Mating Interface


4.20mm

Pitch - Termination Interface

4.20mm

Plating min - Mating

0.762µm

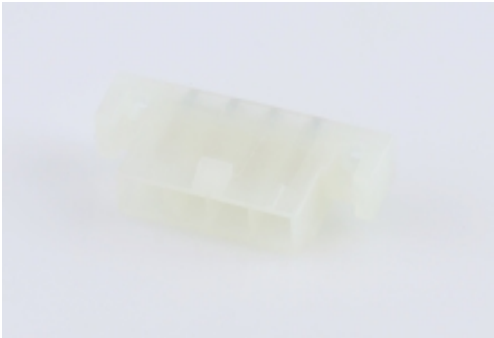

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

D(2022)4187-DC (10

June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

5569 Series

Mates With

39014040 Receptacle, Mini-Fit TPA2 Receptacle Housing 172708

Plating min - Termination	2.540μm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13.0A
Voltage - Maximum	600V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240
Material Info	
Engineering Number	5569-04A3GS
Reference - Drawing Numbers	
Application Specification	AS-5557-001-001
Packaging Specification	PK-5569-002-001
Product Specification	PS-45750-001-001, PS-5556-001-001
Sales Drawing	55690004-SD-000
Test Summary	TS-5556-002-001

This document was generated on 09/03/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION