

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0903250006

Status:

Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

Picoflex PF-50 Header, Vertical, Low Profile, with PCB Pegs, 6 Circuits, Tin (Sn) Plating

Documents:

3D Model

Drawing (PDF)

3D Model (PDF)

Product Specification PS-99020-0011-001 (PDF)

Packaging Specification PK-90325-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Series

Application

Comments

Overview

Product Name

Taxonomy

UPC

PCB Headers

90325

Signal, Wire-to-Board

Low Profile

Picoflex Ribbon-Cable Connectors

Picoflex

PCB Headers and Receptacles

800753643208

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Capable

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Resin

Net Weight

Number of Rows

Orientation

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

No

6

6

Black

30

No

94V-0

No

No

None

Yes

Brass

Tin

Polyester

0.316/g

1

Vertical

Yes

1.60mm

Bag

1.27mm

1.27mm

Yes

Yes

No


No

No

-40° to +105°C

Through Hole

Electrical

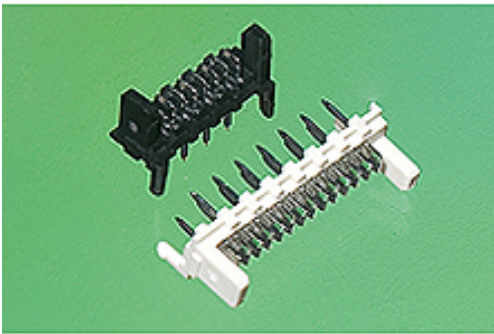

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

90325 Series

Mates With

90327 IDT Connector

Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	230

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-90325-002-001
Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90325-001

This document was generated on 09/03/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION