

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0908143810

Status:


Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

Picoflex PF-50 Header with PCB Pegs, Vertical, Low Profile, Surface Mount, Selective Gold (Au) Plating, 10 Circuits, Tube, Natural

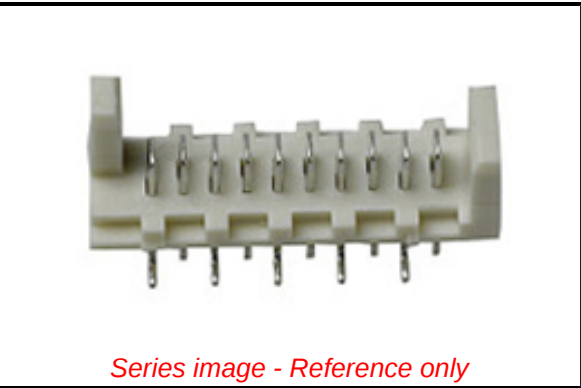

Series image - Reference only

Documents:	
3D Model	Product Specification PS-99020-0011-001 (PDF)
Drawing (PDF)	Packaging Specification PK-90814-001-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
Application tooling part link	
Application Tooling Part Link	69008-1070
General	
Product Family	PCB Headers
Series	90814
Application	Signal, Wire-to-Board
Comments	Low Profile
Overview	Picoflex Ribbon-Cable Connectors
Product Name	Picoflex
Taxonomy	PCB Headers and Receptacles
UPC	800756883878
Physical	
Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Natural
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	0.456/g
Number of Rows	1
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	0.102µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[90814](#) Series

Mates With

[90327](#) IDT Connector

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Extraction Tool
for Picoflex PF-50
Connectors, 4-26
Circuits

[690081070](#)

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	2.4A
Voltage - Maximum	250V AC/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-90814-001-001
Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90814-001

This document was generated on 09/28/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION