Part Number: 0982731006
Status: Active
Overview: NSCC - New Standard Casing Contact
Description: 3.33mm / 6.00mm Pitch Hybrid Inline Female Housing, Right Slide Orientation, Dual Row, 16 Circuits, Gray

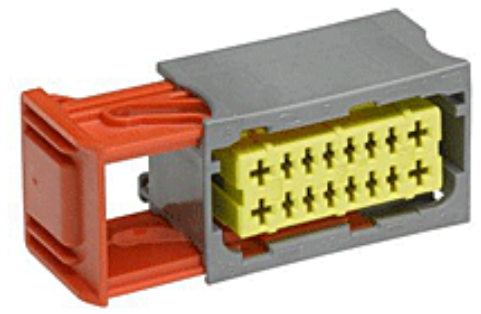
Series image - Reference only

Documents:
3D Model
Drawing (PDF)
Application Specification AS-98273-001-001 (PDF)
Packaging Specification PK-98273-001-001 (PDF)
RoHS Certificate of Compliance (PDF)

General	
Product Family	Crimp Housings
Series	98273
Application	Power, Wire-to-Wire
Comments	7 Amps max @85°C for NSCC terminal 98897 with 2.00 mm² wire or 15 Amps max @85°C for UCC terminal 98898 with 4.00 mm² wire
Overview	NSCC - New Standard Casing Contact
Product Name	NSCC
Taxonomy	Connector Housings
UPC	822348213177
Physical	
Circuits (maximum)	16
Circuits Detail	4x2.8mm 12x1.5mm female terminals
Color - Resin	Natural, Natural (White)
Gender	Receptacle
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Resin	Polyester, Polyester Alloy
Net Weight	17.591/g
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	3.33mm, 6.00mm
Polarized to Mating Part	Yes
Ports	1
Stackable	No
Temperature Range - Operating	-40° to +85°C
Electrical	
Current - Maximum per Contact	15.0A, 7.0A
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-98273-001-001
Packaging Specification	PK-98273-001-001
Sales Drawing	SD-98273-001-001, SD-98273-002-001

EU ELV
Compliant

EU RoHS
Compliant

China RoHS

REACH SVHC
Not Contained Per - D(2022)4187-DC (10 June 2022)

Halogen-Free Status
Not Relevant

For more information, please visit Contact US

China ROHS	Not Relevant
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series
98273 Series

Mates With
982761006

Use With
98897 NSCC Terminals, 98898 UCC2 Terminals