

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1300630012](#)  
**Status:** **Active**  
**Overview:** [BradPower Cordsets and Receptacles](#)  
**Description:** BradPower D-Size (1 3/8"-M35) Single-Ended Cordset, 4 Poles, Male (Straight) to Pigtail with Alternate Key, 10 AWG, PVC Cable, 2.0m (6.56') Length

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

UL E258922

**General**

|                    |  |
|--------------------|--|
| Product Family     | Industrial Cordsets                                |
| Series             | <a href="#">130063</a>                             |
| Connector End A    | BradPower D-Size (1 3/8"-M35)                      |
| Connector End B    | Pigtail  |
| IP Rating          | IP67   |
| Material - Contact | Copper Alloy                                       |
| Overview           | <a href="#">BradPower Cordsets and Receptacles</a> |
| Product Name       | BradPower D-Size                                   |
| Protocol           | EtherNet   |
| Region             | Europe   |
| Taxonomy           | Circular Industrial Cordsets                       |
| Type               | Single Ended                                       |
| UPC                | 78678807022  |

**Physical**

|                               |                            |
|-------------------------------|----------------------------|
| Cable Diameter                | 19.81mm (.780")            |
| Cable Length                  | 2.0m (6.56')               |
| Color - Cable Jacket          | Gray                       |
| Coupling Style                | Threaded                   |
| Gender                        | Male-Pigtail               |
| Keyway                        | Alternate                  |
| LED Indicator                 | No                         |
| Material - Cable Jacket       | PVC                        |
| Material - Connector Body     | PVC                        |
| Material - Coupling Nut       | Anodized Aluminum          |
| Material - Plating Mating     | Gold                       |
| Orientation                   | Straight to Pigtail        |
| Poles                         | 4                          |
| Temperature Range - Operating | -20° to +90°C              |
| Wire Size AWG                 | 10                         |
| Wire/Cable Type               | STOOW, TC-ER Direct Burial |

**Electrical**


|                               |            |
|-------------------------------|------------|
| Current - Maximum per Contact | 25.0A      |
| Voltage - Maximum             | 600V AC/DC |

**Material Info**

|                    |               |
|--------------------|---------------|
| Engineering Number | C04106A48M020 |
|--------------------|---------------|

**Reference - Drawing Numbers**

|               |                   |
|---------------|-------------------|
| Sales Drawing | SD-130063-200-001 |
|---------------|-------------------|

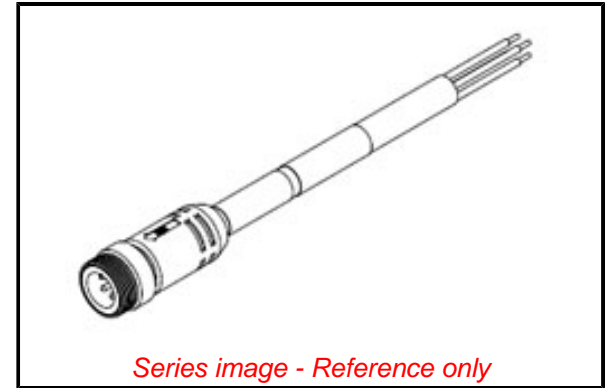

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

**Search Parts in this Series**

[130063 Series](#)

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**