



# Optical Wavelength Laboratories



**OTDR**  
testing  
solutions  
page 4-9



Factory located in the  
Heartland of America

For your local distributor,  
call 262-473-0643.

[OWL-inc.com](http://OWL-inc.com)

FTTH - ORL - Certification Testing - Optical Power Loss - Length Testing - Optical Talk Sets - Visual Fault Locators

## Fiber Optics Test Equipment Catalog

# INTRODUCTION

**ABOUT OWL** - Going on our twelfth year, Optical Wavelength Laboratories, Inc. (OWL) was founded with the idea that high-quality, accurate, and user-friendly test equipment can be affordable for everyone. Since then, OWL has become well accepted globally in the fiber optics industry, upholding its commitment to providing quality, yet affordable fiber test equipment.

Utilizing industry standards such as TIA, EIA, ISO/IEC and Telcordia standards and Fiber Optic Test Procedures (FOTPs), OWL fiber optic test equipment is calibrated and traceable to National Institute of Standards & Technology (N.I.S.T.). OWL has proven quite able to give fiber optic professionals reliable test results for network quality assurance. These results are readily downloadable by most OWL meters to produce meaningful fiber optic certification reports via free OWL Reporter software.

**ABOUT OWL PRODUCTS** - OWL's fiber optic test equipment line includes optical power meters, optical loss test sets, optical return loss meters, multimode and singlemode test kits, light sources, talk sets, optical length testers, and visual fault locators, as well as a range of accessories for cleaning and connectivity. Applications include: LAN, WAN, MAN, Telco, CATV, Laboratory, and FTTH. All OWL test equipment comes with a two-year limited warranty, covering manufacturing and assembly defects. Re-calibration is reasonably priced at 50.00 dollars per unit.

**WHO USES OWL METERS** - In nearly twelve years on the market, OWL has achieved a high profile list of professional organizations that utilize OWL meters for vital test results. OWL fiber optic certification reports assure customers of the quality of service of their mission critical fiber optic networks. Below is a sample of a few high-profile organizations that use OWL fiber optic test equipment.



**Factory located in the Heartland of America**



## TELECOM

ADC Telecommunications  
Alcatel  
AOL Time Warner  
AT&T  
Black Box Networks  
Calix  
CenturyTel / CenturyLink  
Charter Communications  
Cingular Wireless  
Cisco Systems  
Cogent Communications  
Comcast  
Cox Communications  
Crown Castle  
DirecTV  
Embarq  
EMC Computer Systems  
Frontier Communications  
Fujitsu Network Services  
JDS Uniphase  
Level (3) Communications  
Nextel Communications  
NTT Advanced Technology  
OFS  
Qwest Communications  
SBC  
Sprint  
Sun Micro Systems  
T-Mobile  
TDS Telecom  
Verizon

## FINANCE & BANKING

CITI, LLC  
GMAC  
NCR  
Quicken Loans  
Wachovia Corporation  
Wells Fargo Bank

## GOVERNMENT AGENCIES

Bureau of Prisons  
Center for Disease Control & Prevention  
Federal Aviation Administration  
Federal Bureau of Investigation  
NASA  
National Weather Service  
Social Security Administration  
USDA  
US Mint  
US Postal Service  
US Naval Observatory

## AEROSPACE

Cobham Aerospace  
Duncan Aviation  
Johnson Space Center  
Lockheed Martin  
Martin Marietta  
McDonnell Douglas (Boeing)  
Northrop Grumman  
IntelSat Corporation (Division of HUGHES)  
Raytheon  
TRW  
Vandenberg Tracking Station

## SPORTS & ENTERTAINMENT

CNN  
ESPN  
Fox Sports Net North  
Major League Baseball  
NASCAR  
NBC News  
New York Yankees Baseball Club  
Panavision Federal Systems  
Starz Entertainment Group  
Universal Studios Florida  
Viacom  
Walt Disney World  
The Weather Channel  
WWE

## NATIONAL LABORATORIES

Lawrence Livermore National Lab  
Los Alamos National Laboratory  
Oak Ridge National Laboratory

## INDUSTRIAL/MANUFACTURING/COMMERCIAL

Aflon Chemical  
Anteon  
Atmel Semiconductor  
BAE Systems  
Black & Decker  
Chubb Security Systems  
Cooper Electrical  
Cutler-Hammer  
GE Global Research  
GE Medical Systems  
GE Security  
General Dynamics  
General Motors  
Hartz Mountain Corp  
Hewlett-Packard  
Hobby Lobby  
Honeywell  
IBM Honeywell  
Intel Corp.  
International Paper  
Levi-Strauss & Co.  
Motorola  
Office Depot  
Panduit  
Pepsi-Cola  
Qlogic Corp.  
Rockwell International  
Samsung  
Siemens  
Simplex  
Tektronix  
Toyota  
Tyco Electronics  
United Parcel Service (UPS)  
Westinghouse

## ENERGY

Chevron Products  
Conoco  
ExxonMobil  
Florida Power and Light  
GE Nuclear Energy  
Marathon Petroleum  
Oklahoma Gas & Electric  
Progress Energy  
Texaco Chevron  
United Illuminating  
Westar Energy

## EDUCATIONAL

Baker College  
California Institute of Technology  
Colorado State University  
Eastern Illinois University  
Massachusetts Institute of Technology  
Michigan State University  
Ohio University  
Pennsylvania State University  
Texas Wesleyan University  
University of Arizona  
University of California-Davis  
University of California-Los Angeles  
University of California-Santa Barbara  
University of Connecticut  
University of Hawaii  
University of Houston  
University of Maine  
University of Michigan  
University of Nebraska  
University of North Carolina

plus many other community colleges and local school districts

NOTICE: All company names above are trademarked and are the sole property of their respective owners.

## Contact OWL

Optical Wavelength Laboratories, Inc.  
N9623 Old Hwy 12  
Whitewater, WI 53190

Phone: **262-473-0643**  
Fax: **262-473-8737**  
Website: **OWL-INC.COM**

US Government CAGE code:  
**35XR0**

# TABLE OF CONTENTS

## OPTICAL TIME DOMAIN REFLECTOMETERS (OTDRS)

|                                                             |   |
|-------------------------------------------------------------|---|
| OWLTrek 2 Series OTDRs Overview . . . . .                   | 4 |
| OTDR Specifications . . . . .                               | 6 |
| OWLTrek 2 Quad Kit OTDR (multimode and singlemode). . . . . | 7 |
| OWLTrek 2 Singlemode OTDRs . . . . .                        | 8 |
| OWLTrek 2 Multimode OTDRs . . . . .                         | 9 |

## TELCO NETWORK TESTING

|                                             |    |
|---------------------------------------------|----|
| C-band DWDM Optical Channel Monitor.. . . . | 10 |
| PON Optical Power Meter . . . . .           | 11 |

## OPTICAL POWER METERS & TEST KITS

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Optical Power Meters & Test Kits Feature List . . . . .                           | 12 |
| Fiber OWL 7+ Tier 2 Certification Power Meter w/built-in OTDR . . . . .           | 13 |
| Fiber OWL 7+ Tier 2 Certification Bundles. . . . .                                | 14 |
| Fiber OWL 7+ Tier 2 Certification Test Kits. . . . .                              | 15 |
| Installer Series Test Kits . . . . .                                              | 16 |
| Fiber OWL 7 BIDI bi-directional OLTS (automatic two-fiber pair testing) . . . . . | 17 |
| Fiber OWL 7V Optical Power Meter (w/built in VFL port) . . . . .                  | 18 |
| Fiber OWL 7V Series Certification Test Kits . . . . .                             | 19 |
| Fiber OWL 7X Optical Power Meter . . . . .                                        | 20 |
| Fiber OWL 7X Series Certification Test Kits . . . . .                             | 21 |
| Fiber OWL 7 Optical Power Meter . . . . .                                         | 22 |
| Fiber OWL 7 Series Certification Test Kits. . . . .                               | 23 |
| WaveTester Optical Power Meter. . . . .                                           | 24 |
| WaveTester Series Optical Loss Test Kits . . . . .                                | 25 |
| ZOOM 2 Optical Power Meter . . . . .                                              | 26 |
| ZOOM 2 Optical Loss Test Kits. . . . .                                            | 27 |

## FIBER OPTIC LIGHT SOURCES

|                                                                                                     |    |
|-----------------------------------------------------------------------------------------------------|----|
| Fiber Optic Light Source Specifications and Feature List . . . . .                                  | 28 |
| WaveSource Pro Series (for use with all Fiber OWL 7 Series and Installer Series Test Kits). . . . . | 29 |
| WaveSource Series (for use with WaveTester Test Kits). . . . .                                      | 30 |
| Dual OWL Pro Multimode Series (for use with all Fiber OWL 7 Series Test Kits). . . . .              | 31 |
| Dual OWL Multimode Series (for use with ZOOM 2 and WaveTester Test Kits) . . . . .                  | 32 |
| Laser OWL Pro Singlemode Series (for use with all Fiber OWL 7 Series Test Kits) . . . . .           | 33 |
| Laser OWL Singlemode Series (for use with ZOOM 2 and WaveTester Test Kits). . . . .                 | 34 |

## MISCELLANEOUS TEST EQUIPMENT

|                                                        |    |
|--------------------------------------------------------|----|
| PCVFL Precision-coupled Visual Fault Locator . . . . . | 35 |
| HOOTS Multimode Fiber Optic Talk Sets . . . . .        | 36 |
| Laser HOOTS Singlemode Fiber Optic Talk Sets . . . . . | 37 |
| BOLT-NL / VOLT Optical Length Testers . . . . .        | 38 |

## ACCESSORIES



|                                                 |    |
|-------------------------------------------------|----|
| Fiber Optic Inspection Microscopes . . . . .    | 39 |
| Cleaning Accessories . . . . .                  | 40 |
| Download Cables / Power Chargers. . . . .       | 41 |
| Encircled Flux Mode Controller Cables . . . . . | 42 |
| OTDR Dead-zone Boxes and Fiber Rings . . . . .  | 43 |
| Universal Adapter Caps . . . . .                | 44 |

## Optical Time Domain Reflectometer (OTDR)


## OVERVIEW

### LIVE MODE *Display live traces on laptop!*

LIVE MODE is an advanced feature normally found in high-end OTDRs. LIVE MODE continuously shoots OTDR traces every few seconds, allowing users to monitor changes in the optical fiber in real-time. In addition, when the OWLTrek 2 OTDR is attached to a PC, OWLView software includes a Live Viewer mode that takes the OTDR trace and expands it onto the PC display for easier viewing.

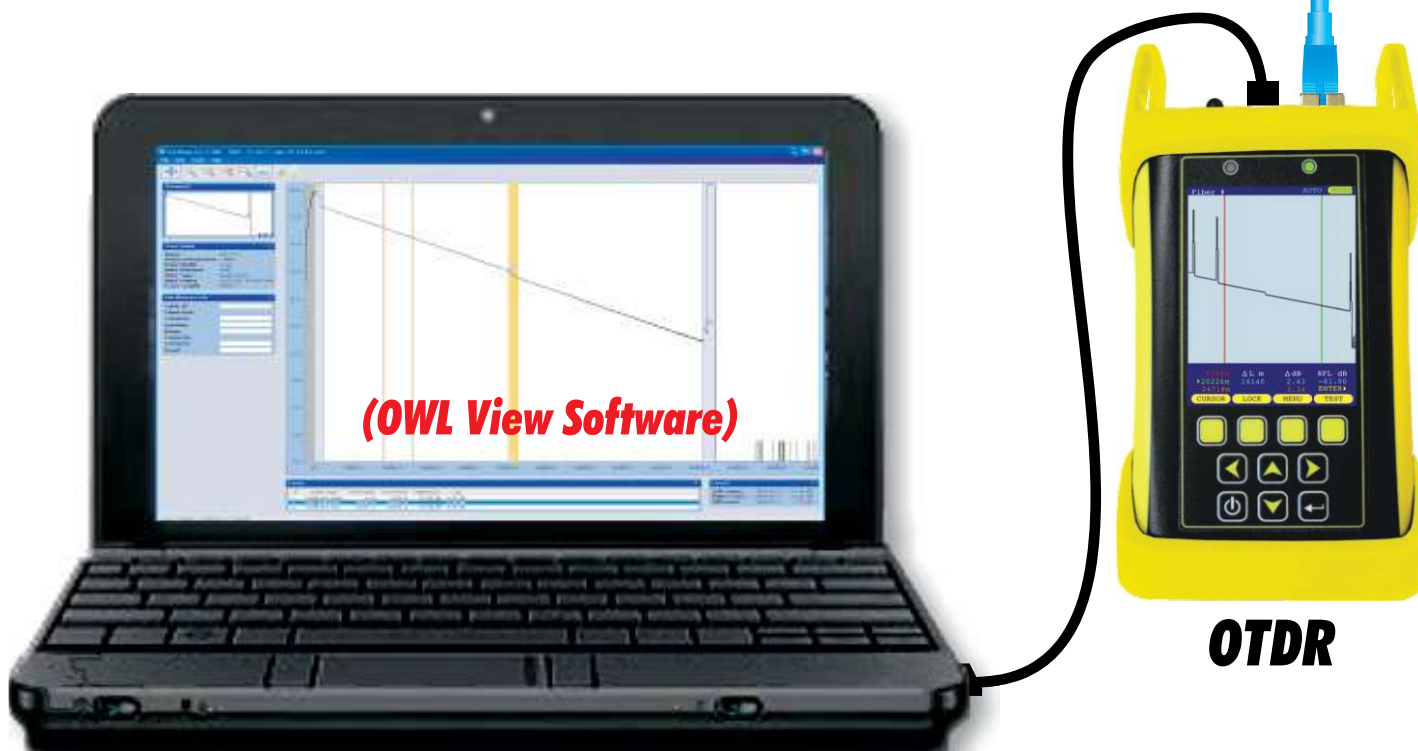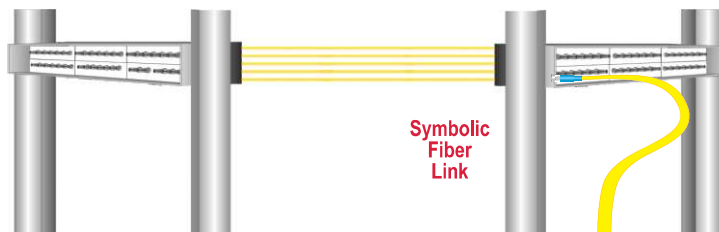

(laptop not included)

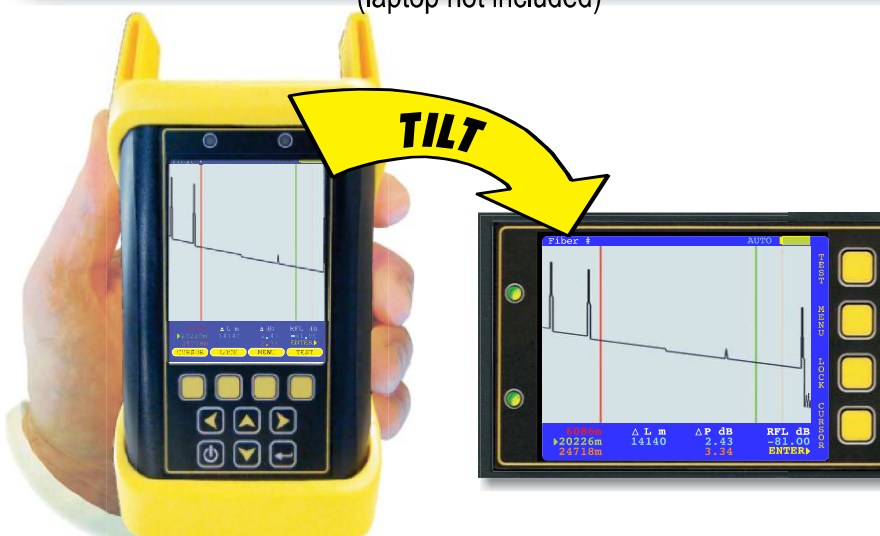

View traces in portrait mode...

...or landscape mode for greater trace viewing detail!

### AUTOMATIC SCREEN ROTATION

For greater viewing flexibility and trace detail, OWL has implemented state-of-the-art MEMS technology which "flips" the high-resolution color LCD display between portrait and landscape mode automatically. In landscape mode, a wider viewing area means greater viewing detail when zooming in on events.





### OWLVIEW OTDR SOFTWARE

OWLView software provides users with a powerful tool for analysis of fiber traces, and is included free of charge with each OWLTrek 2 OTDR.

Features include:

- Hard-disk trace storage
- Professional printed reports
- Event tables
- Event auto-marking
- Zoom in/out functionality
- Dual cursor positioning/locking
- Telcordia GR-196 .SOR version 2 file format
- Live Mode

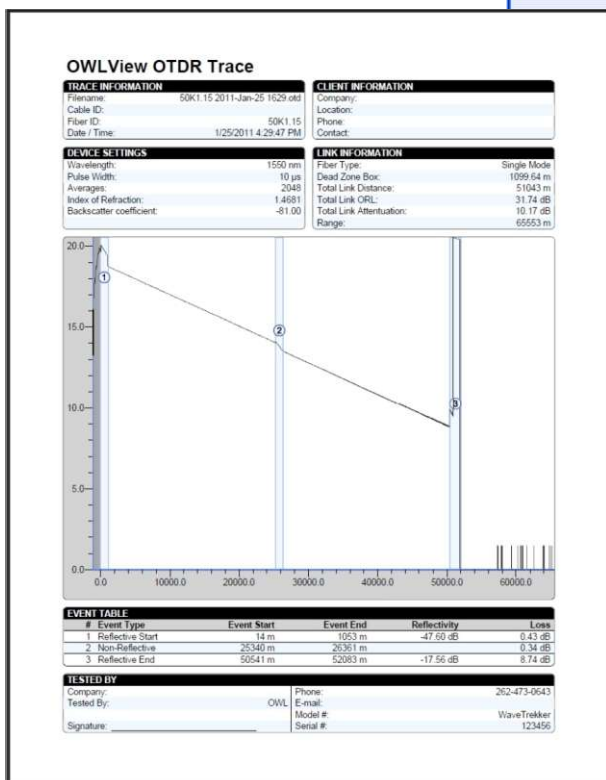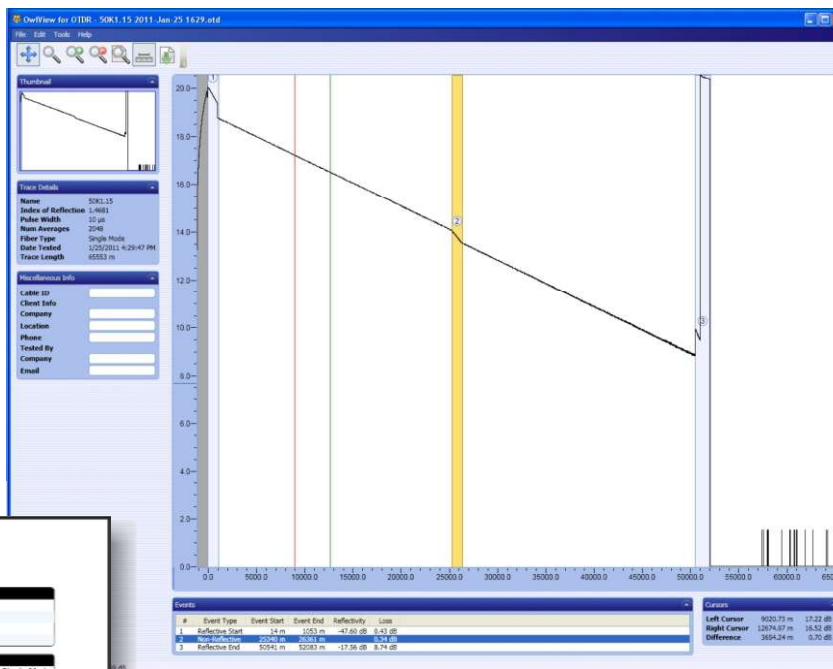


Factory located in the  
Heartland of America

### AUTOMATIC EVENT LOCATION / EVENT TABLES

Automatic event location is an advanced feature normally found only in expensive, high-end OTDRs. OWLTrek 2 OTDRs now bring this feature to the entry-level OTDR market. The OWLTrek 2 OTDR includes an event table showing the location, type, reflectance level, and loss of each event. Users can select an event to view, and automatically zoom in on the event on the OTDR display.

| TRACE EVENTS |      |        |      |  |
|--------------|------|--------|------|--|
| Location     | Type | Refl   | Loss |  |
| 1007m        | REFL | -53.22 | 0.81 |  |
| 5171m        | REFL | -52.27 | 0.73 |  |
| 11872m       | LOSS |        | 0.35 |  |
| 17395m       | REFL | -55.93 | 0.44 |  |
| 24718m       | REFL | -54.92 | 1.04 |  |
| 31372m       | REFL | -57.72 | 0.42 |  |

Select an event...

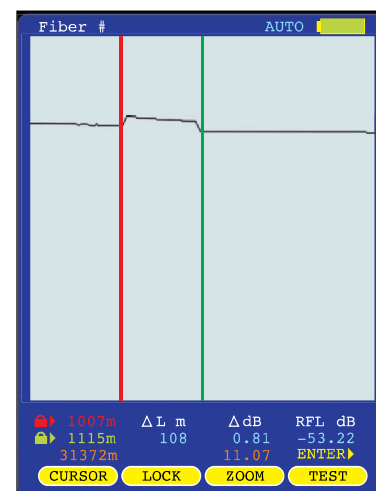

...zoom in automatically!

## Optical Time Domain Reflectometer (OTDR)

## SPECIFICATIONS

| Optical Specifications                 |                                                                     |        |                                                                     |        | General Specifications                        |                                                    |
|----------------------------------------|---------------------------------------------------------------------|--------|---------------------------------------------------------------------|--------|-----------------------------------------------|----------------------------------------------------|
| Fiber Type:                            | Multimode                                                           |        | Singlemode                                                          |        | Display:                                      | 2.8" Color LCD                                     |
| Output Wavelength:                     | 850nm                                                               | 1300nm | 1310nm                                                              | 1550nm | Battery Type:                                 | Lithium Polymer                                    |
| Dynamic Range (SNR=1) <sup>2</sup> :   | 27 dB                                                               | 29 dB  | 28 dB                                                               | 27 dB  | Battery Life:                                 | up to 20 hours                                     |
| Data Point Spacing (m):                | 1                                                                   |        | Up to 64 km: 1                                                      |        | Dimensions:                                   | 2.87" x 4.42" x 1.25"                              |
|                                        |                                                                     |        | Over 64 km: 2                                                       |        | Weight:                                       | 10 oz. (284 g)                                     |
| Pulse Width (m):                       | 1,2,5,10,20,50,100,200                                              |        | 1,2,5,10,20,50,100,200,500,1000                                     |        | Visual Fault Locator Specifications           |                                                    |
| Distance Accuracy (m):                 | 1 + (distance in meters/10000)                                      |        | Over 64km: 1 + (distance in meters/10000)                           |        | Output Wavelength:                            | 650nm                                              |
|                                        |                                                                     |        | Over 64km: 2 + (distance in meters/10000)                           |        | Output Power:                                 | 1 mW                                               |
| Distance Range (km):                   | 20                                                                  |        | 128                                                                 |        | Operating Modes:                              | CW / Flash                                         |
| Number of Stored Traces:               | Minimum Trace Distance: 3000 +<br>Maximum Trace Distance: up to 400 |        | Minimum Trace Distance: 3000 +<br>Maximum Trace Distance: up to 200 |        | Optical Power Meter Specifications (Optional) |                                                    |
| Event Dead Zone(m): <sup>3</sup>       | 2                                                                   |        |                                                                     |        | Photodetector:                                | InGaAs                                             |
| Attenuation Dead Zone(m): <sup>4</sup> | 5                                                                   |        |                                                                     |        | Fiber Type:                                   | Multimode / Singlemode                             |
| Index of Refraction:                   | 1.4000 to 1.6000                                                    |        |                                                                     |        | Wavelengths:                                  | 850, 980, 1300, 1310<br>1490, 1550, 1625           |
| Maximum Data Points:                   | 64000                                                               |        |                                                                     |        | Accuracy:                                     | 0.15 dB                                            |
|                                        |                                                                     |        |                                                                     |        | Resolution:                                   | 0.01 dB                                            |
|                                        |                                                                     |        |                                                                     |        | Measurement Units:                            | dBm / dB                                           |
|                                        |                                                                     |        |                                                                     |        | Measurement Range:                            | +5 to -50 dBm<br>(typical; varies with wavelength) |

1: All price shown are in US Dollars (USD). List price is shown for US customers only. Prices outside the US may vary based on individual countries' import duties and taxes, currency conversion, and other value added charges.

2: Using maximum pulse width

3: Width measured 1.5dB down on each side of a reflective event using 1 meter pulse width

4: Distance from event beginning to within 0.5dB where backscatter resumes using 1 meter pulse width

5: Out to furthest reflective event


### OTDR Connector Port Diagram

Use this diagram to determine the appropriate connector types required when acquiring OTDR fiber rings and other test cables


|      |           |                        |
|------|-----------|------------------------|
| OTDR | LC        | All models             |
| VFL  | LC        | All models             |
| OPM* | Universal | Models ending with 'M' |

\*Some models include an integrated power meter

#### NO INTEGRATED POWER METER

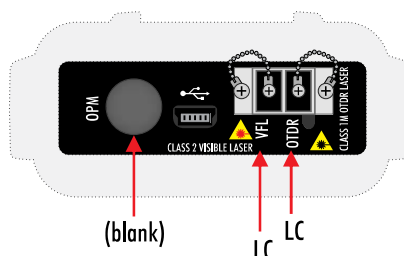

#### INTEGRATED POWER METER \* (model # ends with 'M')

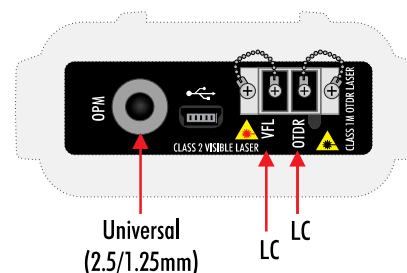

### Application Note: Why do some OTDRs have an integrated power meter?\*

Before testing with an OTDR, power meters should be used to verify that there is no light energy present in the fiber under test, for two important reasons:

**TEST RESULTS:** light energy in the fiber that was not generated by the OTDR laser will mix with the OTDR laser pulse and "garble" the OTDR trace; and

**SAFETY:** intense light levels coming from high-power transmitters (such as telco and CATV) could potentially destroy the sensitive avalanche photodiode in the OTDR.

Power meters are integrated into OTDRs in case the user: 1) does not have a stand-alone power meter; or 2) would prefer having the power meter built in to the OTDR as a matter of convenience.

## Optical Time Domain Reflectometer (OTDR)

**SINGLEMODE / MULTIMODE**

**Small, pocket-sized OTDRs do same job as larger, more expensive OTDRs, for a fraction of the cost**



Most OTDR manufacturers tend to implement an inflexible approach by over-integrating four wavelengths into a single OTDR unit. OWL takes an innovative approach that very few OTDR manufacturers even consider—by including separate dual-wavelength multimode and singlemode OTDRs. There are two key disadvantages to using an over-integrated quad-wave OTDR. First, most installer firms need to have at least two crews working simultaneously to be profitable. Second, most fiber optic jobs rarely include both multimode and singlemode fibers. So, if one crew is installing multimode and another crew is installing singlemode, it makes sense to have separate multimode and singlemode OTDRs so one crew does not have to wait on the other to finish their job. And even with two separate units, the OWLTrek 2 Quad Kit OTDR is still more cost-effective than other manufacturer's quad-wavelength OTDR options.

### Two Units are Better than One!

#### Pricing

| Model #: | Description              | List Price: |
|----------|--------------------------|-------------|
| WT02-Q   | OWLTrek 2 Quad Kit OTDR  | 5275.00     |
| WT02-QM* | OWLTrek 2M Quad Kit OTDR | 5495.00     |

\* — 'M' models include optical power meter

#### Related Accessories

|                         |             |
|-------------------------|-------------|
| OTDR Fiber Rings        | see page 43 |
| OTDR Dead Zone Boxes    | see page 43 |
| Cables / Power Supplies | see page 41 |
| Universal Adapters      | see page 44 |
| Cleaning / Inspection   | see page 40 |

#### Features

- 2.8" color LCD display automatically rotates based on orientation of OTDR (portrait vs. landscape)
- LIVE MODE allows users to expand OTDR display onto larger laptop screen
- Automatically locates events and places them in an internal event table
- Full horizontal and vertical pan/zoom function
- User-selectable parameters such as index of refraction, test mode, pulse width, and averaging
- Integrated user help screens
- USB interface for downloading stored readings
- Integrated visual fault locator
- Re-chargeable Lithium Polymer battery allows for up to 20 hours of normal usage
- FREE OWLView for OTDR software prints OTDR trace reports and stored OTDR readings on hard disk for later retrieval

#### Applications

- Optical fault location in multimode and singlemode fibers
- Loss measurement of reflective and backscatter events
- Link attenuation measurement
- Reflectance measurement of reflective events
- Optical fiber length measurement
- Optical power measurement (with optional optical power meter)



**Factory located in the  
Heartland of America**



## Optical Time Domain Reflectometer (OTDR)

**SINGLEMODE**



### Features

- 2.8" color LCD display automatically rotates based on orientation of OTDR (portrait vs. landscape)
- LIVE MODE allows users to expand OTDR display onto larger laptop screen
- Automatically locates events and places them in an internal event table
- Full horizontal and vertical pan/zoom function
- User-selectable parameters such as index of refraction, test mode, pulse width, and averaging
- Integrated user help screens
- USB interface for downloading stored readings
- Integrated visual fault locator
- Re-chargeable Lithium Polymer battery allows for up to 20 hours of normal usage
- FREE OWLView for OTDR software prints OTDR trace reports and stored OTDR readings on hard disk for later retrieval

### Applications


- Optical fault location in singlemode fibers
- Loss measurement of reflective and backscatter events
- Link attenuation measurement
- Reflectance measurement of reflective events
- Optical fiber length measurement
- Optical power measurement (with optional optical power meter)

| <b>Pricing</b> |                       |             |
|----------------|-----------------------|-------------|
| Model #:       | Description           | List Price: |
| WT02-S13       | OWLTrek 2 1310        | 1975.00     |
| WT02-S15       | OWLTrek 2 1550        | 1975.00     |
| WT02-S35       | OWLTrek 2 1310/1550   | 2965.00     |
| WT02-S13M      | OWLTrek 2M* 1310      | 2195.00     |
| WT02-S15M      | OWLTrek 2M* 1550      | 2195.00     |
| WT02-S35M      | OWLTrek 2M* 1310/1550 | 3185.00     |


\* — 'M' models include optical power meter

### Related Accessories

|                         |             |
|-------------------------|-------------|
| OTDR Fiber Rings        | see page 43 |
| OTDR Dead Zone Boxes    | see page 43 |
| Cables / Power Supplies | see page 41 |
| Universal Adapters      | see page 44 |
| Cleaning / Inspection   | see page 40 |

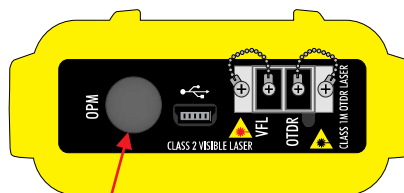

**No integrated  
power meter**

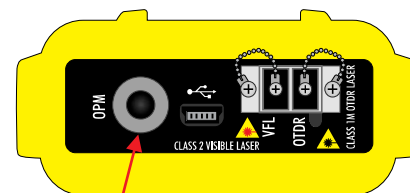

**Option: universal power  
meter port (2.5mm / 1.25mm)**



**Factory located in the  
Heartland of America**



## Optical Time Domain Reflectometer (OTDR)

**MULTIMODE**



### Features

- 2.8" color LCD display automatically rotates based on orientation of OTDR (portrait vs. landscape)
- LIVE MODE allows users to expand OTDR display onto larger laptop screen
- Automatically locates events and places them in an internal event table
- Full horizontal and vertical pan/zoom function
- User-selectable parameters such as index of refraction, test mode, pulse width, and averaging
- Integrated user help screens
- USB interface for downloading stored readings
- Integrated visual fault locator
- Re-chargeable Lithium Polymer battery allows for up to 20 hours of normal usage
- FREE OWLView for OTDR software prints OTDR trace reports and stored OTDR readings on hard disk for later retrieval


### Applications

- Optical fault location in multimode fibers
- Loss measurement of reflective and backscatter events
- Link attenuation measurement
- Reflectance measurement of reflective events
- Optical fiber length measurement
- Optical power measurement (with optional optical power meter)


### Pricing

| Model #:  | Description          | List Price: |
|-----------|----------------------|-------------|
| WT02-M13  | OWLTrek 2 1300       | 2085.00     |
| WT02-M83  | OWLTrek 2 850/1300   | 2965.00     |
| WT02-M13M | OWLTrek 2M* 1300     | 2305.00     |
| WT02-M83M | OWLTrek 2M* 850/1300 | 3185.00     |

\* — 'M' models include optical power meter

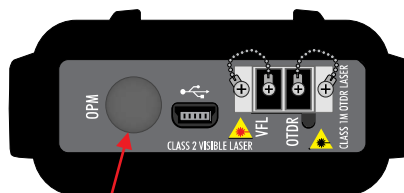

**No integrated  
power meter**

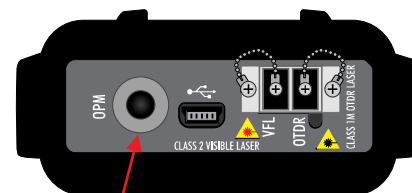

**Option: universal power  
meter port (2.5mm / 1.25mm)**

### Related Accessories

|                         |             |
|-------------------------|-------------|
| OTDR Fiber Rings        | see page 43 |
| OTDR Dead Zone Boxes    | see page 43 |
| Cables / Power Supplies | see page 41 |
| Universal Adapters      | see page 44 |
| Cleaning / Inspection   | see page 40 |



**Factory located in the  
Heartland of America**

# C-band DWDM Optical Channel Monitor

## TELCO NETWORK TESTING



### Description

OWL optical channel monitors (OCM) provide users with quick and accurate optical channel measurement for DWDM networks using the wavelengths specified in the ITU G.694.1. Features include: user-definable optical power threshold, selectable channel spacing (50 & 100 GHz), and data storage. Data can be viewed either as a bar graph or in tabular format, and the LCD display automatically rotates based on the orientation of the OCM unit. Viewing in landscape mode allows for more viewing detail.

| Optical Specifications  |                                       |
|-------------------------|---------------------------------------|
| Operating Frequencies   | 191.35 to 196.10 THz (C-band)         |
| Total Channels          | 48 (100GHz spacing) 96 (50GHz offset) |
| Nominal Channel Spacing | 50/100 GHz                            |
| Channel Input Power     | -10 to -40 dBm                        |
| Total Input Power       | +7 dBm                                |
| Absolute Power Accuracy | ±1.0 dB                               |
| Relative Power Accuracy | 1.0 dB                                |
| Total Power Accuracy    | ±1.0 dB                               |
| Display Type            | Backlit graphical LCD                 |
| Auto-shutdown           | Yes                                   |
| Operating Temperature   | -5 to 70° C                           |
| Operating Humidity      | 5 to 85%                              |
| Storage Temperature     | -40 to 85° C                          |
| Storage Humidity        | 5 to 95%                              |

### Related Accessories

Cleaning / Inspection see page 40

### Pricing


| Model #:                      | Description                    | List Price: |
|-------------------------------|--------------------------------|-------------|
| OCM-C                         | C-band optical channel monitor | 5495.00     |
| Quantity discounts negotiable |                                |             |

### Applications

- C-band DWDM optical channel monitoring
- C-band optical spectrum analysis

### Features

- Optical channel monitoring of ITU DWDM grid wavelengths with 50GHz and 100GHz spacing
- 2.8" color LCD display
- SC/UPC connector port
- USB interface for downloading stored readings
- Re-chargeable Lithium Polymer battery allows for up to 20 hours of normal usage

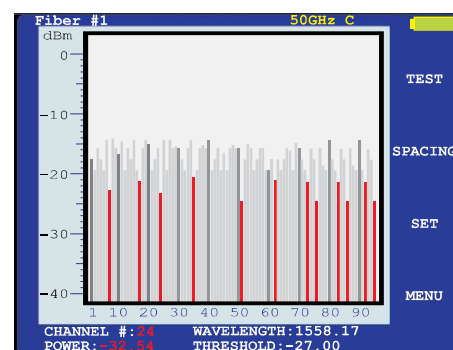

Viewing data in landscape mode allows for greater viewing detail

### General Specifications

|               |                             |
|---------------|-----------------------------|
| Display Type: | High-resolution Color LCD   |
| Display Size: | 2.8" diagonal               |
| Battery Type: | Lithium Polymer             |
| Battery Life: | up to 20 hours normal usage |
| Dimensions:   | 2.87" x 4.42" x 1.25"       |
| Weight:       | 10 ounces (284 g)           |



Factory located in the  
Heartland of America

# IS YOUR PON METER LACKING NIST TRACEABILITY?



## WHY IS NIST TRACEABILITY IMPORTANT?

- 1) High-end corporate and government bids require that test equipment used to test network installations, including fiber optics testers, be NIST traceable.
- 2) Quality standards such as ISO 9000 often require annual re-certification of test equipment and that such records be available for audit.
- 3) Certification and NIST traceability often become a vital shield in potential litigation or arbitration of quality of work done for clients.

## WHAT IS NIST TRACEABILITY?

Many OWL products are traceable to the National Institute of Standards and Technology (NIST). Traceability to NIST means that a product has been calibrated against a known US government standard, and ensures that the product's calibration procedure can be verified through an unbroken chain of documents.

NIST calibrates a single piece of test equipment and provides manufacturers with a report of calibration as proof of calibration according to their standard for this equipment. This report of calibration gives us a point of reference by which we can set the accuracy of our optical fiber test equipment.

All of our meters and sources are set to this point of reference with the US government equipment. Our customers can rest assured that their equipment is calibrated to US government standards, and provides them with the greatest amount of accuracy possible.

## Features

- Handheld PON power meter
- Simultaneous measurement of PON signals
- Upstream (from ONT): 1310nm
- Downstream (from OLT): 1490 & 1550nm
- Data storage for up to 1000 data points
- Stores up to 10 threshold sets
- 36-hour battery life (3x AAA batteries)
- 10-minute auto shutdown



## Overview

The PON-2M PON power meter allows users to simultaneously measure signals upstream (1310nm) from the ONT and downstream (1490nm & 1550nm) from the OLT in FTTH/PON networks.

Up to 1000 data points can be stored in internal memory, which can be recalled on the LCD display at a later time.

Up to 10 threshold sets can be stored in internal memory, allowing users to measure PON signals against pre-set thresholds based on different measurement points in the FTTH network.

This unit runs 36 hours on 3 AAA batteries, and has 10-minute shutdown feature.

## Related Accessories

- |                   |             |
|-------------------|-------------|
| Cleaners          | see page 40 |
| Inspection Scopes | see page 39 |

| Specifications              |                                                                            |
|-----------------------------|----------------------------------------------------------------------------|
| Measurement Range           | 1310nm: +10 to -35 dBm<br>1490nm: +10 to -50 dBm<br>1550nm: +25 to -45 dBm |
| ORL                         | APC: 55 dB; UPC: 35 dB                                                     |
| Pass-through Insertion Loss | < 1.5 dB                                                                   |
| Accuracy (burst signal)     | ± 0.5 dB (burst signal)                                                    |
| Accuracy                    | ± 0.2 dB                                                                   |
| Threshold Sets              | 10                                                                         |
| Data Storage                | 100                                                                        |
| Connector                   | SC/PC                                                                      |
| Auto Power Off              | 10 minutes of inactivity                                                   |
| Battery Charge              | Yes                                                                        |
| Operate Time                | ~ 36 hours                                                                 |
| Storage Temperature         | -20 to +60° C; 90% relative humidity                                       |
| Operating Temperature       | -10 to +50° C; 90% relative humidity                                       |
| Power Supply                | (3) AAA batteries or AC adapter                                            |
| Size                        | 7.48 x 3.54 x 1.57 inches                                                  |
| Weight                      | ~ 1 pound                                                                  |

### OPTICAL POWER METER / TEST KIT FEATURE LIST

|                             | FIBER OWL 7+<br>SERIES                 | FIBER OWL 7 BIDI<br>SERIES | FIBER OWL 7V<br>SERIES | FIBER OWL 7X<br>BOLT SERIES | FIBER OWL 7<br>SERIES | INSTALLER<br>SERIES | WAVETESTER<br>SERIES        | ZOOM 2<br>SERIES |
|-----------------------------|----------------------------------------|----------------------------|------------------------|-----------------------------|-----------------------|---------------------|-----------------------------|------------------|
| Power Meters                | page 13                                | –                          | page 18                | page 20                     | page 22               | –                   | page 24                     | page 26          |
| Test Kits                   | page 14                                | page 17                    | page 19                | page 21                     | page 23               | page 16             | page 25                     | page 27          |
|                             | FEATURES                               |                            |                        |                             |                       |                     |                             |                  |
| NIST Traceable              | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   | ✓                           | ✓                |
| Optical Power               | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   | ✓                           | ✓                |
| Optical Loss                | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   | ✓                           | ✓                |
| Data Storage                | Up to 10000                            | Up to 10000                | Up to 10000            | Up to 10000                 | Up to 10000           | Up to 10000         | Up to 200                   |                  |
| Certification Reports       | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   | ✓                           |                  |
| On-screen PASS/FAIL         | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   |                             |                  |
| Optical Length Measurement  | ✓                                      | ✓                          | ✓                      | ✓                           |                       |                     |                             |                  |
| Number of Projects/jobs     | Unlimited                              | Unlimited                  | Unlimited              | Unlimited                   | Unlimited             | Unlimited           |                             |                  |
| Color LCD                   | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   |                             |                  |
| Built-in Help               | ✓                                      | ✓                          | ✓                      | ✓                           | ✓                     | ✓                   |                             |                  |
| Built-in OTDR               | ✓                                      |                            |                        |                             |                       |                     |                             |                  |
| Auto BIDI Testing           |                                        | ✓                          |                        |                             |                       |                     |                             |                  |
| Integrated VFL              | ✓                                      | Optional                   | ✓                      | Optional                    |                       |                     | Optional                    | Optional         |
|                             | SPECIFICATIONS                         |                            |                        |                             |                       |                     |                             |                  |
| Supported Fiber Types       | Multimode / Singlemode                 |                            |                        |                             |                       |                     |                             |                  |
| Calibrated Wavelengths (nm) | 850, 980, 1300, 1310, 1490, 1550, 1625 |                            |                        |                             |                       |                     | 850, 1300, 1310, 1490, 1550 |                  |
| Measurement Range (dBm)     | +5 to -70                              |                            |                        |                             |                       |                     | +5 to -60                   |                  |
| Accuracy (dB)               | ±0.15                                  |                            |                        |                             |                       |                     | ±0.20                       |                  |
| Display Resolution (dB)     | 0.01                                   |                            |                        |                             |                       |                     |                             |                  |



## Optical Power Meter/OTDR

## SINGLEMODE / MULTIMODE



The Fiber OWL 7+ is a highly accurate hand-held optical power meter, capable of performing a wide range of functions from simple optical power and loss measurements to OTDR testing to **full-featured standards-based Tier 2 (OTDR) link certification** (when used with a WaveSource Pro light source\*).


**OWLView Software.** Fiber OWL 7+ Tier 2 certification test results can be downloaded to OWLView certification software.

OWLView software includes a comprehensive set of features for all of your certification requirements:


- Tier 1 certification
- Tier 2 certification
- IEC 61300-3-35 endface quality analysis

All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

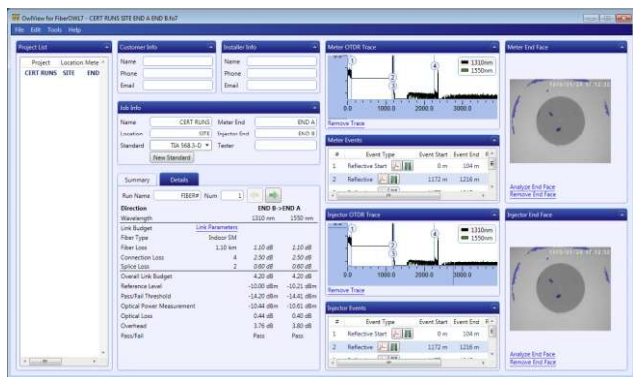

**OWLVIEW SOFTWARE**

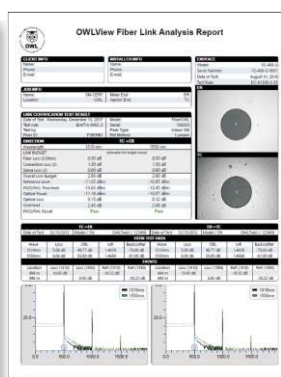

**TRI-REPORT**

| Key Specifications                  |                                               |
|-------------------------------------|-----------------------------------------------|
| Detector Type                       | InGaAs                                        |
| Calibrated Wavelengths <sup>1</sup> | 850, 980, 1300, 1310, 1490, 1550, 1625        |
| Measurement Range                   | +5 to -70 dBm                                 |
| Accuracy                            | ±0.15 dB                                      |
| Display Resolution                  | 0.01 dB                                       |
| Battery Life                        | Up to 50 hours (Lithium Polymer)              |
| Connector Type                      | 2.5mm/1.25mm universal                        |
| Data Storage                        | Up to 10000 data points                       |
| Displayed Measurement Units         | dBm, dB, mW, µW, nW                           |
| Modes of Operation                  | CERT, LOSS, OPM                               |
| Length Measurement Range / Accuracy | up to 25 km / ±2.5 m                          |
| Display Type                        | Hi-resolution Color LCD                       |
| Auto-shutdown                       | Yes                                           |
| Operating Temperature               | -10 to 55° C                                  |
| Storage Temperature                 | -30 to 70° C                                  |
| Dimensions                          | 2.9 x 4.49 x 1.3 in. (72.9 x 112.3 x 31.8 mm) |
| Weight                              | 12 oz. (373g)                                 |

1: Bold wavelengths are NIST Traceable

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                    |             |
|--------------------|-------------|
| Cleaners           | see page 40 |
| Universal Adapters | see page 44 |
| Chargers/Cables    | see page 41 |
| OTDR Launch Cables | see page 43 |



**Factory located in the  
Heartland of America**



### Pricing

|      |                                          |         |
|------|------------------------------------------|---------|
| F7+M | Fiber OWL 7+ Multimode Tier 2 Certifier  | 3950.00 |
| F7+S | Fiber OWL 7+ Singlemode Tier 2 Certifier | 3950.00 |

### Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- Full-featured Tier 1 / Tier 2 fiber link certification
- Full-featured OTDR testing
- Fiber optic link length measurement

### Features

- InGaAs photodetector
- Multimode and singlemode ready
- 2.5mm and 1.25mm universal port
- Integrated OTDR
- Integrated visual fault locator (VFL)<sup>†</sup>
- User-friendly Link Wizard
- Set reference ("zeroing") function
- Shows PASS/FAIL readings
- Display absolute and relative power measurements in dBm, dB, and W
- Hi-resolution full-color LCD
- Up to 50 hours battery life (9V)
- USB interface for downloading stored readings
- FREE OWLView software
- NIST Traceable

\* requires additional light source (see light sources below)

### Bundles:

- Fiber OWL 7+ Bundles page 14

### Test Kits:

- Fiber OWL 7+ Test Kits page 15

### Light Sources\*:

- WaveSource Pro (MM & SM) page 29

### Fiber Videoscopes\*:

- VS-400-U page 39

## Complete Tier 2 Certification Bundles

## SINGLEMODE / MULTIMODE

**BUNDLES INCLUDE FIBER RINGS AND FIBER VIDEOSCOPE TO COMPLETE TRI-REPORT CAPABILITY!**

| Pricing            |                  |                   |                           |                 |                  |                                    |   |                        |                    |
|--------------------|------------------|-------------------|---------------------------|-----------------|------------------|------------------------------------|---|------------------------|--------------------|
| Model <sup>1</sup> | Tier 2 Multimode | Tier 2 Singlemode | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>2</sup> Source |   | Auto Test <sup>2</sup> | Price <sup>4</sup> |
| KF7 + QB           | F7 + M           | F7 + S            | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | ●                                  | — | ●                      | 9900.00            |
| KF7 + MB           | F7 + M           | —                 | WPMX                      | 850nm<br>1300nm | —                | ●                                  | — | ●                      | 5975.00            |
| KF7 + SB           | —                | F7 + S            | WPSX                      | —               | 1310nm<br>1550nm | ●                                  | — | ●                      | 6810.00            |

<sup>1</sup> Light source connector type: SC

<sup>2</sup> Auto-testing allows users to measure two wavelengths simultaneously.

<sup>3</sup> Visual Fault Locators may be integrated into certain source models. VFLs can also be purchased separately. Contact OWL for more information.

<sup>4</sup> Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

Shown here: KF7+QB



**Includes:** Fiber OWL 7+ multimode and/or singlemode Tier 2 certifier(s) • WaveSource Pro light source • 2.5mm/1.25mm universal adapter caps • multimode and/or singlemode fiber rings • USB video scope • USB chargers / cables • USB flash drive containing documentation and OWLView software • NIST certificate of calibration • hard-shell carrying case

Not every installer needs to certify fiber links to Tier 2 requirements, but for those installers who want to successfully compete for prominent fiber bids without breaking the bank, they will need a Tier 2 certifier with TRI-report capability like the Fiber OWL 7+.

**WHY IS TIER 2 CERTIFICATION IMPORTANT?** Many end-users are now requiring Tier 2 certification because it offers a more comprehensive measure of the quality of a fiber network installation. Cabling system manufacturers are also requiring pass/fail, OTDR, and endface analysis for awarding long-term system warranties.

In addition to Tier 2 certification, these users and cabling system manufacturers are also requesting pictures of endfaces to ensure the quality of the endface terminations comply the IEC 61300-3-35 endface quality standard.

**WHAT IS THE BENEFIT OF THE FIBER OWL 7+?** Many prominent, recognizable test manufacturers offer Tier 2 certification and endface analysis, just like OWL does. However, these manufacturers' options are far more expensive, generally costing over 20,000.00 dollars!

**WIN MORE BIDS AND SAVE THOUSANDS WITH FIBER OWL 7+ TIER 2 CERTIFIERS AND OWLVIEW TRI-REPORTS!**

### Related Accessories

Battery Chargers

see page 41

Cleaners

see page 40

Encircled Flux Cables

see page 42

OTDR Launch Cables

see page 43

### Applications

- Full-featured Tier 1 and Tier 2 fiber link certification
- OTDR testing and fault location
- Optical loss (attenuation) measurement
- Patch cord verification
- Fiber optic link length measurement
- Visual fault location

### Features

- Multimode, singlemode, and Quad options
- Built-in OTDR
- User-friendly Link Wizard
- PASS / FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable

OWLView Software. Fiber OWL 7+ Series test kits with OWLView software are essential for modern fiber optic installers.



OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification (included with Fiber OWL 7 Series test kits)
  - Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
  - IEC 61300-3-35 endface quality analysis: add a fiber videoscope
- All together, these three reports can be combined into a comprehensive TRI-REPORT!

TRI-REPORTS are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

### OWLVIEW SOFTWARE

### TRI-REPORT

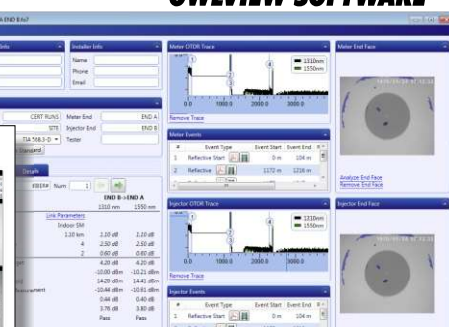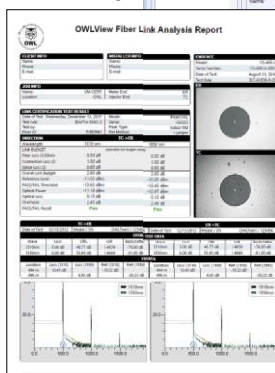

**TRI-REPORTS help installers win fiber bids over their competitors who only offer Tier 1 certification reports!**



Factory located in the Heartland of America





## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**WIN MORE BIDS AND SAVE THOUSANDS WITH FIBER OWL 7+ TIER 2 CERTIFIERS AND OWLVIEW TRI-REPORTS!**

| Pricing            |                  |                   |                           |                 |                  |                                    |   |                        |                    |
|--------------------|------------------|-------------------|---------------------------|-----------------|------------------|------------------------------------|---|------------------------|--------------------|
| Model <sup>1</sup> | Tier 2 Multimode | Tier 2 Singlemode | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>2</sup> Source |   | Auto Test <sup>2</sup> | Price <sup>4</sup> |
| KF7+MS             | F7+M             | F7+S              | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | ●                                  | — | ●                      | 8900.00            |
| KF7+MX             | F7+M             | —                 | WPMX                      | 850nm<br>1300nm | —                | ●                                  | — | ●                      | 4405.00            |
| KF7+SX             | —                | F7+S              | WPSX                      | —               | 1310nm<br>1550nm | ●                                  | — | ●                      | 5175.00            |

1 Light source connector type: SC

2 Auto-testing allows users to measure two wavelengths simultaneously.

3 Visual Fault Locators may be integrated into certain source models. VFLs can also be purchased separately. Contact OWL for more information.

4 Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.



Shown here: KF7+MX

### Includes:

- Fiber OWL 7+ Tier 2 multimode and/or singlemode fiber certifier(s)
- WaveSource Pro light source
- 2.5mm/1.25mm universal adapter caps
- USB chargers and cables
- 1.25mm in-adapter ferrule connector cleaner
- 2.5mm in-adapter ferrule connector cleaner
- USB flash drive including documentation and OWLView certification software
- NIST Certificate of Traceability
- Rugged hard-shell carrying case

### Applications

- Full-featured Tier 1 and Tier 2 fiber link certification
- OTDR testing and fault location
- Optical loss (attenuation) measurement
- Patch cord verification
- Fiber optic link length measurement
- Visual fault location

### Features

- Multimode, singlemode, and Quad options
- Built-in OTDR
- User-friendly Link Wizard
- PASS/FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable

**OWLView Software.** Fiber OWL 7+ Series test kits with OWLView software are essential for modern fiber optic installers.

OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification (included with Fiber OWL 7 Series test kits)
- Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
- IEC 61300-3-35 endface quality analysis: add a fiber videoscope

All together, these three reports can be combined into a comprehensive TRI-REPORT!

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

Not every installer needs to certify fiber links to Tier 2 requirements, but for those installers who want to successfully compete for prominent fiber bids without breaking the bank, they will need a Tier 2 certifier with TRI-report capability like the Fiber OWL 7+.

**WHY IS TIER 2 CERTIFICATION IMPORTANT?** Many end-users are now requiring Tier 2 certification because it offers a more comprehensive measure of the quality of a fiber network installation. Cabling system manufacturers are also requiring pass/fail, OTDR, and endface analysis for awarding long-term system warranties.

In addition to Tier 2 certification, these users and cabling system manufacturers are also requesting pictures of endfaces to ensure the quality of the endface terminations comply the IEC 61300-3-35 endface quality standard.

**WHAT IS THE BENEFIT OF THE FIBER OWL 7+?** Many prominent, recognizable test manufacturers offer Tier 2 certification and endface analysis, just like OWL does. However, these manufacturers' options are far more expensive, generally costing over 20,000.00 dollars!

**WIN MORE BIDS AND SAVE THOUSANDS WITH FIBER OWL 7+ TIER 2 CERTIFIERS AND OWLVIEW TRI-REPORTS!**


### Fiber Videoscopes\*:

- VS-400-U page 39

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |
| OTDR Launch Cables    | see page 43 |


### TRI-REPORT

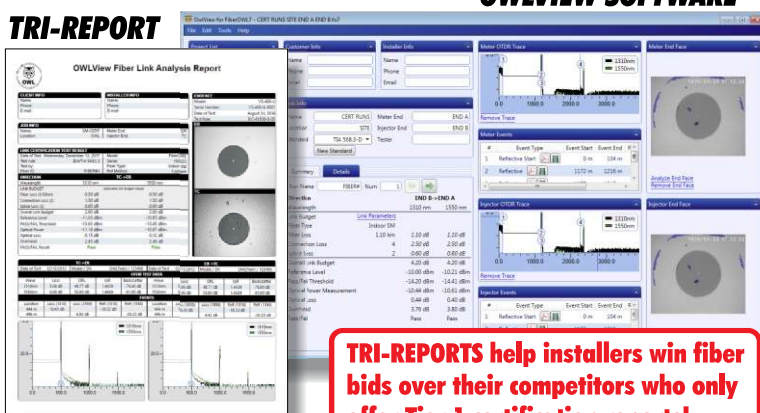

### OWLVIEW SOFTWARE



Factory located in the  
Heartland of America



## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**Sooner or later, installer jobs will require certification report testing!**

### Pricing

| Model <sup>1</sup> | Power Meter | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>3</sup> | Auto Test <sup>2</sup> | Length | Price <sup>4</sup> |
|--------------------|-------------|---------------------------|-----------------|------------------|-----------------------------|------------------------|--------|--------------------|
| IS-KIT-Q           | F7          | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | —                           | —                      | —      | 1805.00            |
| IS-KIT-M           | F7          | WPMX                      | 850nm<br>1300nm | —                | —                           | —                      | —      | 870.00             |

1 Light source connector type: SC

2 Auto-testing allows users to measure two wavelengths simultaneously.

3 Visual Fault Locators may be integrated into meter and/or source. VFLs can also be purchased separately. Contact OWL for more information.

4 Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Applications

- Full-featured Tier 1 fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification

### Features

- Multimode and singlemode ready
- User-friendly Link Wizard
- PASS/FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable

**OWLView Software.** Installer Series test kits with OWLView software are essential for modern fiber optic installers.

OWLView software includes a comprehensive set of features for all of your certification requirements:


- Tier 1 certification (included with Fiber OWL 7 Series test kits)
- Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
- IEC 61300-3-35 endface quality analysis: add a fiber videoscope

All together, these three reports can be combined into a comprehensive TRI-REPORT!

TRI-REPORTS are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.



Shown here: IS-KIT-Q

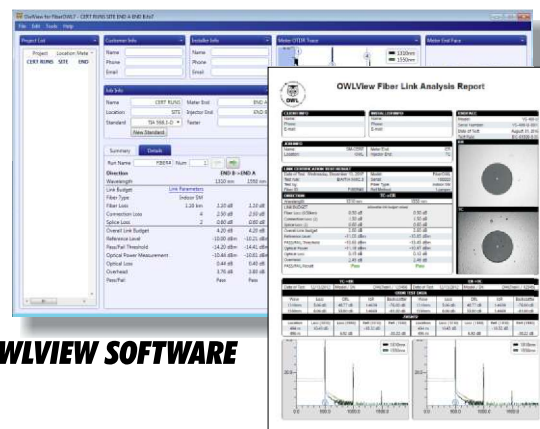

OWLVIEW SOFTWARE

TRI-REPORT

### Fiber Videoscopes\*:

- VS-400-U page 39

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad page 7

### Related Accessories

Battery Chargers


see page 41

Cleaners


see page 40

Encircled Flux Cables

see page 42



**Factory located in the  
Heartland of America**





## Bi-directional OLTS




## SINGLEMODE / MULTIMODE



| Pricing |                 |                  |                |         |
|---------|-----------------|------------------|----------------|---------|
| Model   | Multimode       | Singlemode       | Integrated VFL | Price   |
| F7BMS   | 850nm<br>1300nm | 1310nm<br>1550nm | —              | 4400.00 |
| F7BMX   | 850nm<br>1300nm | —                | —              | 3335.00 |
| F7BMV   | 850nm<br>1300nm | —                | ●              | 3970.00 |
| F7BSX   | —               | 1310nm<br>1550nm | —              | 3660.00 |
| F7BSV   | —               | 1310nm<br>1550nm | ●              | 4210.00 |

### Full-featured dual-fiber bi-directional certification!

Fiber OWL 7 BIDI certifiers are ideal for testing environments where the fibers all have the same basic configuration, but individual cables have various lengths. No need to set up individual jobs or perform separate length measurements! Simply move from cable to cable, and the **Fiber OWL 7 BIDI** will automatically measure the length!

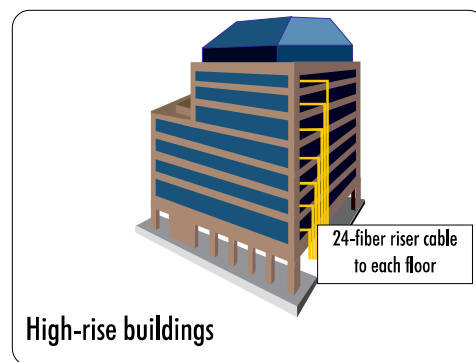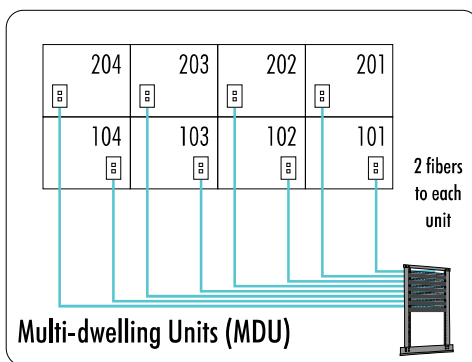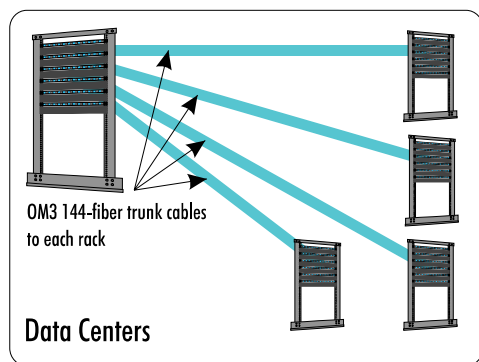

### Applications

- Full-featured Tier 1 fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification
- Fiber optic link length measurement

### Features

- Affordable alternative to competitive bi-directional testers
- Available in multimode, singlemode, and quad versions
- Dual-fiber testing measures length with each test
- PASS/ FAIL in the field for up to 8 readings simultaneously
- Includes main and remote units
- Prints official bi-directional reports via OWLView software
- NIST Traceable

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |
| Universal Adapters    | see page 44 |

### Decreases Testing Time!

Fiber OWL 7 BIDI certifiers have fully automated bi-directional communications, with helpful diagrams and visual prompts to guide technicians through the often-confusing bi-directional testing process.


To further decrease testing time, **Fiber OWL 7 BIDI** certifiers utilize a test mode called **PAIR MODE**, where both fibers in a pair are tested simultaneously in one direction only, as per cabling standard requirements.

**PAIR MODE** is the fastest way to certify your network to TIA-568 Tier 1 requirements!

Call OWL at 262-473-0643 for more information about using the Fiber OWL 7 BIDI for fast and easy bi-directional, dual-fiber certification!



Factory located in the  
Heartland of America

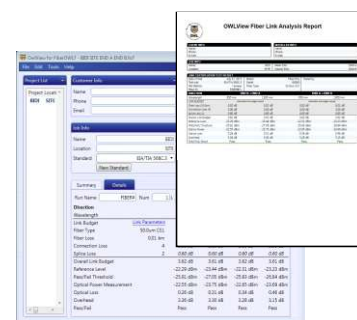

### OWLView Software

Fiber OWL 7 BIDI certifiers come with FREE OWLView certification software!



## Optical Power Meter

## SINGLEMODE / MULTIMODE



The Fiber OWL 7V is a highly accurate hand-held optical power meter, capable of performing a wide range of functions from simple optical power and loss measurements to full-featured standards-based link certification (when used with a WaveSource Pro light source\*) with built-in visual fault location.

**OWLView Software.** Fiber OWL 7V certification test results can be downloaded to OWLView certification software.

OWLView software includes a comprehensive set of features for all of your certification requirements:


- Tier 1 certification
- Tier 2 certification
- IEC 61300-3-35 endface quality analysis

All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

### Optical Ports

**VISUAL FAULT LOCATOR PORT**  
red laser for visual fault location and visual fiber identification (LC connector)

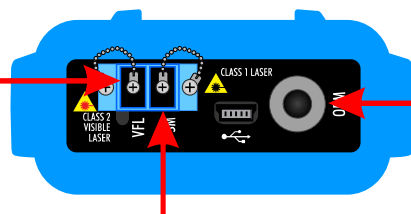

**LENGTH TEST PORT**  
allows end-to-end length measurement for both multimode and singlemode fibers (LC connector)

**UNIVERSAL DETECTOR PORT**  
Includes:  
2.5mm adapter (SC, ST, FC)  
1.25mm adapter (LC)

| Key Specifications                  |                                               |
|-------------------------------------|-----------------------------------------------|
| Detector Type                       | InGaAs                                        |
| Calibrated Wavelengths <sup>1</sup> | 850, 980, 1300, 1310, 1490, 1550, 1625        |
| Measurement Range                   | +5 to -70 dBm                                 |
| Accuracy                            | ±0.15 dB                                      |
| Display Resolution                  | 0.01 dB                                       |
| Battery Life                        | Up to 50 hours (Lithium Polymer)              |
| Connector Type                      | 2.5mm/1.25mm universal                        |
| Data Storage                        | Up to 10000 data points                       |
| Displayed Measurement Units         | dBm, dB, mW, µW, nW                           |
| Modes of Operation                  | CERT, LOSS, OPM                               |
| Length Measurement Range / Accuracy | up to 25 km / ±2.5 m                          |
| Display Type                        | Hi-resolution Color LCD                       |
| Auto-shutdown                       | Yes                                           |
| Operating Temperature               | -10 to 55° C                                  |
| Storage Temperature                 | -30 to 70° C                                  |
| Dimensions                          | 2.9 x 4.49 x 1.3 in. (72.9 x 112.3 x 31.8 mm) |
| Weight                              | 12 oz. (373g)                                 |


<sup>1</sup>: Bold wavelengths are NIST Traceable  
Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                    |             |
|--------------------|-------------|
| Cleaners           | see page 40 |
| Universal Adapters | see page 44 |
| Chargers/Cables    | see page 41 |



Factory located in the  
Heartland of America



### Pricing

|     |                                               |         |
|-----|-----------------------------------------------|---------|
| F7V | Fiber OWL 7V optical power meter <sup>1</sup> | 1315.00 |
|-----|-----------------------------------------------|---------|

### Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- Full-featured fiber link certification
- Fiber optic link length measurement
- Integrated visual fault locator (VFL)

### Features

- InGaAs photodetector
- Multimode and singlemode ready
- 2.5mm and 1.25mm universal port
- Integrated optical length tester
- User-friendly Link Wizard
- Set reference ("zeroing") function
- Shows PASS/FAIL readings
- Display absolute and relative power measurements in dBm, dB, and W
- Hi-resolution full-color LCD
- Up to 50 hours battery life (9V)
- USB interface for downloading stored readings
- FREE OWLView software
- NIST Traceable

\* requires additional light source (see light sources below)

### Test Kits:

- Fiber OWL 7V Test Kits page 19

### Light Sources\*:

- WaveSource Pro (MM & SM) page 29

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad Kit OTDR page 7

### Fiber Videoscopes\*:

- VS-400-U page 39

## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**Sooner or later, installer jobs will require certification report testing!**

### Pricing

| Model <sup>1</sup> | Power Meter | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>3</sup><br>Meter | Source | Auto Test <sup>2</sup> | Length | Price <sup>4</sup> |
|--------------------|-------------|---------------------------|-----------------|------------------|--------------------------------------|--------|------------------------|--------|--------------------|
| KF7VMS             | F7V         | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | ●                                    | —      | ●                      | ●      | 2960.00            |
| KF7VMX             | F7V         | WPMX                      | 850nm<br>1300nm | —                | ●                                    | —      | ●                      | ●      | 1770.00            |
| KF7VMV             | F7V         | WPMV                      | 850nm<br>1300nm | —                | ●                                    | ●      | ●                      | ●      | 1990.00            |
| KF7VSX             | F7V         | WPSX                      | —               | 1310nm<br>1550nm | ●                                    | —      | ●                      | ●      | 2540.00            |
| KF7VSV             | F7V         | WPSV                      | —               | 1310nm<br>1550nm | ●                                    | ●      | ●                      | ●      | 2760.00            |

1 Light source connector type: SC

2 Auto-testing allows users to measure two wavelengths simultaneously.

3 Visual Fault Locators may be integrated into meter and/or source. VFLs can also be purchased separately. Contact OWL for more information.

4 Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Applications

- Full-featured Tier 1 fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification
- Fiber optic link length measurement
- Visual fault location

### Features

- Multimode and singlemode ready
- User-friendly Link Wizard
- PASS/FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable

**OWLView Software.** Fiber OWL 7 Series test kits with OWLView software are essential for modern fiber optic installers.

OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification (included with Fiber OWL 7 Series test kits)
- Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
- IEC 61300-3-35 endface quality analysis: add a fiber videoscope

All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.



### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad page 7

### Fiber Videoscopes\*:


- VS-400-U page 39

### Related Accessories

- Battery Chargers see page 41
- Cleaners see page 40
- Encircled Flux Cables see page 42
- Universal Adapters see page 44



Factory located in the  
Heartland of America

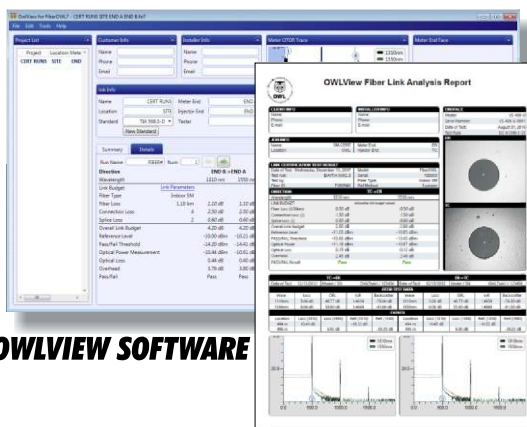

### OWLVIEW SOFTWARE

### TRI-REPORT





## Optical Power Meter

## SINGLEMODE / MULTIMODE



The Fiber OWL 7X is a highly accurate hand-held optical power meter, capable of performing a wide range of functions from simple optical power and loss measurements to full-featured standards-based link certification (when used with a WaveSource Pro light source\*).

**OWLView Software.** Fiber OWL 7X certification test results can be downloaded to OWLView certification software.

OWLView software includes a comprehensive set of features for all of your certification requirements:


- Tier 1 certification
- Tier 2 certification
- IEC 61300-3-35 endface quality analysis

All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

### Optical Ports

**LENGTH TEST PORT**  
works with both multimode and singlemode fibers (SC connector)

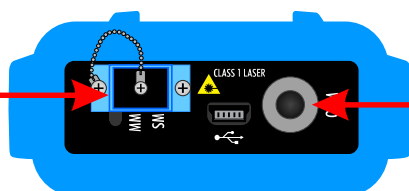

**UNIVERSAL DETECTOR PORT**  
Includes:  
2.5mm adapter (SC, ST, FC)  
1.25mm adapter (LC)

| Key Specifications                  |                                               |
|-------------------------------------|-----------------------------------------------|
| Detector Type                       | InGaAs                                        |
| Calibrated Wavelengths <sup>1</sup> | 850, 980, 1300, 1310, 1490, 1550, 1625        |
| Measurement Range                   | +5 to -70 dBm                                 |
| Accuracy                            | ±0.15 dB                                      |
| Display Resolution                  | 0.01 dB                                       |
| Battery Life                        | Up to 50 hours (Lithium Polymer)              |
| Connector Type                      | 2.5mm/1.25mm universal                        |
| Data Storage                        | Up to 10000 data points                       |
| Displayed Measurement Units         | dBm, dB, mW, μW, nW                           |
| Modes of Operation                  | CERT, LOSS, OPM                               |
| Length Measurement Range / Accuracy | up to 25 km / ±2.5 m                          |
| Display Type                        | Hi-resolution Color LCD                       |
| Auto-shutdown                       | Yes                                           |
| Operating Temperature               | -10 to 55° C                                  |
| Storage Temperature                 | -30 to 70° C                                  |
| Dimensions                          | 2.9 x 4.49 x 1.3 in. (72.9 x 112.3 x 31.8 mm) |
| Weight                              | 12 oz. (373g)                                 |


<sup>1</sup>: Bold wavelengths are NIST Traceable  
Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                    |             |
|--------------------|-------------|
| Cleaners           | see page 40 |
| Universal Adapters | see page 44 |
| Chargers/Cables    | see page 41 |



Factory located in the  
Heartland of America



### Pricing

|     |                                           |         |
|-----|-------------------------------------------|---------|
| F7X | Fiber OWL 7X Extended optical power meter | 1095.00 |
|-----|-------------------------------------------|---------|

### Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- Full-featured fiber link certification
- Fiber optic link length measurement

### Features

- InGaAs photodetector
- Multimode and singlemode ready
- 2.5mm and 1.25mm universal port
- Integrated optical length tester
- Optional integrated visual fault locator (VFL)<sup>†</sup>
- User-friendly Link Wizard<sup>†</sup>
- Set reference ("zeroing") function
- Shows PASS/FAIL readings
- Display absolute and relative power measurements in dBm, dB, and W
- Hi-resolution full-color LCD
- Up to 50 hours battery life (9V)
- USB interface for downloading stored readings
- FREE OWLView software
- NIST Traceable

\* requires additional light source (see light sources below)

### Test Kits:

- Fiber OWL 7X Test Kits page 21

### Light Sources\*:

- WaveSource Pro (MM & SM) page 29

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad Kit OTDR page 7

### Fiber Videoscopes\*:

- VS-400-U page 39



## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**Sooner or later, installer jobs will require certification report testing!**

### Pricing

| Model <sup>1</sup> | Power Meter | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>3</sup> | Source | Auto Test <sup>2</sup> | Length | Price <sup>4</sup> |
|--------------------|-------------|---------------------------|-----------------|------------------|-----------------------------|--------|------------------------|--------|--------------------|
| KF7XMS             | F7X         | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | —                           | —      | ●                      | ●      | 2740.00            |
| KF7XMX             | F7X         | WPMX                      | 850nm<br>1300nm | —                | —                           | —      | ●                      | ●      | 1550.00            |
| KF7XMV             | F7X         | WPMV                      | 850nm<br>1300nm | —                | —                           | ●      | ●                      | ●      | 1770.00            |
| KF7XSX             | F7X         | WPSX                      | —               | 1310nm<br>1550nm | —                           | —      | ●                      | ●      | 2320.00            |
| KF7XSV             | F7X         | WPSV                      | —               | 1310nm<br>1550nm | —                           | ●      | ●                      | ●      | 2540.00            |

<sup>1</sup> Light source connector type: SC

<sup>2</sup> Auto-testing allows users to measure two wavelengths simultaneously.

<sup>3</sup> Visual Fault Locators may be integrated into meter and/or source. VFLs can also be purchased separately. Contact OWL for more information.

<sup>4</sup> Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.



Shown here: KF7XMS

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad page 7

### Fiber Videoscopes\*:

- VS-400-U page 39

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |
| Universal Adapters    | see page 44 |



Factory located in the  
Heartland of America

### Applications

- Full-featured Tier 1 fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification
- Fiber optic link length measurement

### Features

- Multimode and singlemode ready
- User-friendly Link Wizard
- PASS/FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable


**OWLView Software.** Fiber OWL 7 Series test kits with OWLView software are essential for modern fiber optic installers.

OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification (included with Fiber OWL 7 Series test kits)
- Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
- IEC 61300-3-35 endface quality analysis: add a fiber videoscope


All together, these three reports can be combined into a comprehensive TRI-REPORT!

TRI-REPORTS are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

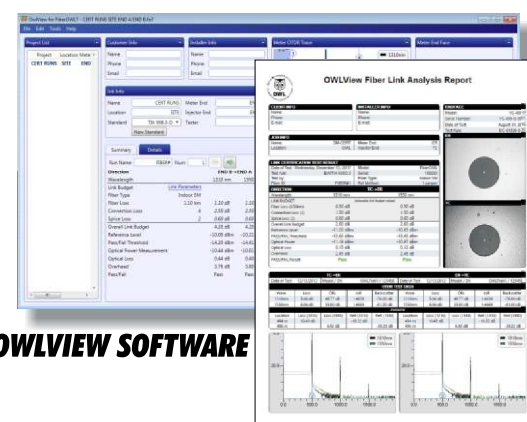

OWLVIEW SOFTWARE

TRI-REPORT



## Optical Power Meter

## SINGLEMODE / MULTIMODE



The **Fiber OWL 7** is a highly accurate hand-held optical power meter, capable of performing a wide range of functions from simple optical power and loss measurements to full-featured standards-based link certification (when used with a WaveSource Pro light source\*).

**OWLView Software.** Fiber OWL 7 certification test results can be downloaded to OWLView certification software.

OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification
- Tier 2 certification
- IEC 61300-3-35 endface quality analysis


All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

### Optical Ports

#### OPTIONAL

Upgradeable to include length tester and/or VFL ports

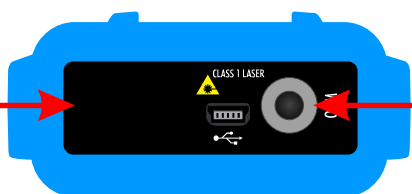

#### UNIVERSAL DETECTOR PORT

Includes:  
2.5mm adapter (SC,ST, FC)  
1.25mm adapter (LC)

| Pricing |                                 |        |
|---------|---------------------------------|--------|
| F7      | Fiber OWL 7 optical power meter | 765.00 |

### Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- Full-featured fiber link certification

### Features

- InGaAs photodetector
- Multimode and singlemode ready
- 2.5mm and 1.25mm universal port
- User-friendly Link Wizard
- Set reference ("zeroing") function
- Shows PASS/FAIL readings
- Display absolute and relative power measurements in dBm, dB, and W
- Hi-resolution full-color LCD
- Up to 50 hours battery life (9V)
- USB interface for downloading stored readings
- FREE OWLView software
- NIST Traceable

\* requires additional light source (see light sources below)

### Test Kits:

- Fiber OWL 7 Test Kits page 23

### Light Sources\*:

- WaveSource Pro (MM & SM) page 29

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad Kit OTDR page 7

### Fiber Videoscopes\*:

- VS-400-U page 39

| Key Specifications                  |                                               |
|-------------------------------------|-----------------------------------------------|
| Detector Type                       | InGaAs                                        |
| Calibrated Wavelengths <sup>1</sup> | 850, 980, 1300, 1310, 1490, 1550, 1625        |
| Measurement Range                   | +5 to -70 dBm                                 |
| Accuracy                            | ±0.15 dB                                      |
| Display Resolution                  | 0.01 dB                                       |
| Battery Life                        | Up to 50 hours (Lithium Polymer)              |
| Connector Type                      | 2.5mm/1.25mm universal                        |
| Data Storage                        | Up to 10000 data points                       |
| Displayed Measurement Units         | dBm, dB, mW, µW, nW                           |
| Modes of Operation                  | CERT, LOSS, OPM                               |
| Display Type                        | Hi-resolution Color LCD                       |
| Auto-shutdown                       | Yes                                           |
| Operating Temperature               | -10 to 55° C                                  |
| Storage Temperature                 | -30 to 70° C                                  |
| Dimensions                          | 2.9 x 4.49 x 1.3 in. (72.9 x 112.3 x 31.8 mm) |
| Weight                              | 12 oz. (373g)                                 |

1: Bold wavelengths are NIST Traceable


Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

Cleaners see page 40  
Universal Adapters see page 44  
Chargers/Cables see page 41



Factory located in the  
Heartland of America



## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**Sooner or later, installer jobs will require certification report testing!**

### Pricing

| Model <sup>1</sup> | Power Meter | Light Source <sup>1</sup> | Multimode       | Singlemode       | Integrated VFL <sup>3</sup> |   | Auto Test <sup>2</sup> | Length | Price <sup>4</sup> |
|--------------------|-------------|---------------------------|-----------------|------------------|-----------------------------|---|------------------------|--------|--------------------|
| KF7-MS             | F7          | WPMS                      | 850nm<br>1300nm | 1310nm<br>1550nm | —                           | — | ●                      | —      | 2410.00            |
| KF7-MX             | F7          | WPMX                      | 850nm<br>1300nm | —                | —                           | — | ●                      | —      | 1220.00            |
| KF7-MV             | F7          | WPMV                      | 850nm<br>1300nm | —                | —                           | ● | ●                      | —      | 1440.00            |
| KF7-SX             | F7          | WPSX                      | —               | 1310nm<br>1550nm | —                           | — | ●                      | —      | 1990.00            |
| KF7-SV             | F7          | WPSV                      | —               | 1310nm<br>1550nm | —                           | ● | ●                      | —      | 2210.00            |

<sup>1</sup> Light source connector type: SC

<sup>2</sup> Auto-testing allows users to measure two wavelengths simultaneously.

<sup>3</sup> Visual Fault Locators may be integrated into meter and/or source. VFLs can also be purchased separately. Contact OWL for more information.

<sup>4</sup> Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.



### Applications

- Full-featured Tier 1 fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification

### Features

- Multimode and singlemode ready
- User-friendly Link Wizard
- PASS/FAIL in the field
- Simultaneous dual-wavelength measurements
- Prints official certification reports via OWLView certification software
- NIST Traceable

**OWLView Software.** Fiber OWL 7 Series test kits with OWLView software are essential for modern fiber optic installers.

OWLView software includes a comprehensive set of features for all of your certification requirements:

- Tier 1 certification (included with Fiber OWL 7 Series test kits)
- Tier 2 certification: Import OTDR traces with OWLTrek 2 OTDRs
- IEC 61300-3-35 endface quality analysis: add a fiber videoscope

All together, these three reports can be combined into a comprehensive **TRI-REPORT!**

**TRI-REPORTS** are quickly becoming a requirement for modern installers that want to stay competitive in bidding for big corporate and government jobs, or when applying for long-term cabling system warranties.

### Fiber Videoscopes\*:

- VS-400-U page 39

### OTDRs\*:

- OWLTrek 2 multimode page 9
- OWLTrek 2 singlemode page 8
- OWLTrek 2 Quad page 7

### Related Accessories

- Battery Chargers see page 41
- Cleaners see page 40
- Encircled Flux Cables see page 42
- Universal Adapters see page 44



**Factory located in the  
Heartland of America**



### TRI-REPORT





## Optical Power Meter

## SINGLEMODE / MULTIMODE



## Pricing

|        |                                    |        |
|--------|------------------------------------|--------|
| WT-1   | WaveTester optical power meter     | 495.00 |
| WT-1V† | WaveTester VFL optical power meter | 715.00 |

## Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- Full-featured fiber link certification
- FTTx link loss verification

## Features

- InGaAs photodetector
- Multimode and singlemode ready
- Universal detector port supports 2.5mm and 1.25mm connectors
- Set reference ("zeroing") function
- Display absolute and relative power measurements in dBm, dB, and W
- Backlit LCD
- Over 250 hours battery life (9V)
- USB interface for downloading stored readings
- FREE OWL Reporter software
- NIST Traceable
- Optional integrated visual fault locator (VFL) port

† includes integrated visual fault locator (VFL) port

\* requires additional light source

## Description

The WaveTester is a highly accurate hand-held optical power meter, capable of performing a wide range of functions from simple optical power and loss measurements to full-featured standards-based link certification. When used with OWL WaveSource fiber optic light sources, the WaveTester provides fiber optic professionals with automatic wavelength switching so that the power meter and light source are always set to the same wavelength, and automatic dual-wavelength storage cuts down on testing time and human error. Up to 200 fiber runs can be stored in memory which can be downloaded to a PC using FREE OWL Reporter software via the supplied download cable. A 2.5mm universal and 1.25mm universal connector port are included to connect to a wide variety of popular fiber optic connectors, including SC, ST, FC, LC, MU, and other SFF. As an option, a visual fault locator (VFL) can be integrated into the WaveTester. VFLs are useful for locating faults behind patch panels, and for identifying optical ports at the far end of a fiber link.

## Key Specifications

|                             |                                                       |
|-----------------------------|-------------------------------------------------------|
| Detector Type               | InGaAs                                                |
| Calibrated Wavelengths      | 850, 1300, 1310, 1490, 1550                           |
| Measurement Range           | +5 to -60 dBm                                         |
| Accuracy                    | ±0.20 dB                                              |
| Display Resolution          | 0.01 dB                                               |
| Battery Life                | Up to 1000 hours (Re-chargeable Lithium Polymer)      |
| Connector Type              | 2.5mm/1.25mm universal                                |
| Data Storage                | Up to 200 data points                                 |
| Displayed Measurement Units | dBm, dB, mW, $\mu$ W                                  |
| Display Type                | Backlit LCD                                           |
| Auto-shutdown               | Yes                                                   |
| Operating Temperature       | -10 to 55°C                                           |
| Storage Temperature         | -30 to 70°C                                           |
| Dimensions                  | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |
| Weight                      | 10 oz. (284g)                                         |

1: Bold wavelengths are NIST Traceable

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

## Related Accessories

|                    |             |
|--------------------|-------------|
| Universal Adapters | see page 44 |
| Battery Chargers   | see page 41 |
| Download Cables    | see page 41 |

Factory located in the  
Heartland of America

## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

**Sooner or later, installer/contractor jobs will require certification report testing!**

### Pricing

| Model <sup>1</sup>   | Power Meter | Light Source <sup>1</sup> | Multimode       | Singlemode       | Auto Test <sup>2</sup> | Length <sup>3</sup> | Integrated VFL <sup>4</sup> | Price <sup>5</sup> |
|----------------------|-------------|---------------------------|-----------------|------------------|------------------------|---------------------|-----------------------------|--------------------|
| KIT-WT-WSMDxx        | WT-1        | WS-MDxx                   | 850nm<br>1300nm | —                | ●                      | —                   | —                           | 875.00             |
| KIT-WT-WSMDVxx       | WT-1        | WS-MDVxx                  | 850nm<br>1300nm | —                | ●                      | —                   | ●                           | 1085.00            |
| KIT-WT-WSSDxx        | WT-1        | WS-SDxx                   | —               | 1310nm<br>1550nm | ●                      | —                   | —                           | 1610.00            |
| KIT-WT-WSVSDxx       | WT-1        | WS-VSDxx                  | —               | 1310nm<br>1550nm | ●                      | —                   | ●                           | 1815.00            |
| KIT-WT-WSMDSxx       | WT-1        | WS-MDSxx                  | 850nm<br>1300nm | 1310nm<br>1550nm | ●                      | —                   | —                           | 2010.00            |
| KIT-WT-D285xx        | WT-1        | D02-85xx                  | 850nm           | —                | —                      | —                   | —                           | 670.00             |
| KIT-WT-D2xx          | WT-1        | D02xx                     | 850nm<br>1300nm | —                | —                      | —                   | —                           | 915.00             |
| KIT-WT-L213xx        | WT-1        | L02-13xx                  | —               | 1310nm           | —                      | —                   | —                           | 875.00             |
| KIT-WT-L2xx          | WT-1        | L02xx                     | —               | 1310nm<br>1550nm | —                      | —                   | —                           | 1230.00            |
| KIT-WT-D285xx-L213xx | WT-1        | D02-85xx                  | 850nm           | —                | —                      | —                   | —                           | 1080.00            |
|                      |             | L02-13xx                  | —               | 1310nm           |                        |                     |                             |                    |
| KIT-WT-D2xx-L2xx     | WT-1        | D02xx                     | 850nm<br>1300nm | —                | —                      | —                   | —                           | 1670.00            |
|                      |             | L02xx                     | —               | 1310nm<br>1550nm |                        |                     |                             |                    |

1 xx : specify ST or SC depending upon preferred light source connector type.

2 Auto-testing allows users to measure two wavelengths simultaneously.

3 Stand-alone optical length testers can be purchased separately. Contact OWL for more information.

4 Light source includes integrated visual fault locator (VFL) port. VFLs can also be integrated into the WaveTester optical power meter, or purchased as a separate unit. Contact OWL for more information.

5 Price shown in US Dollars (USD).

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Applications

- Full-featured fiber link certification
- Optical loss (attenuation) measurement
- Patch cord verification

### Features

- Multimode and singlemode ready
- Simultaneous dual-wavelength measurements
- User-friendly Link Wizard (via OWL Reporter software)
- Prints official certification reports
- NIST Traceable

### Description

No professional fiber cable installer can afford to go without certification testing capability. Without it, installers/contractors will not be able to submit bids for important government and corporate fiber jobs, and spreadsheets or hand-written results are not acceptable for cabling system warranties because there is no assurance that the report is genuine or has not been tampered with. Not only are customers increasingly demanding printed certification reports for their fiber installations, signed certification reports are also proof of an installer's job well done in case of the quality of their work is being disputed. WaveTester Series test kits are ideal for the fiber optic professional who requires standards-based certification of multimode and/or singlemode fiber links, including TIA-568, ISO 11801, and Ethernet. When used with WaveSource series fiber optic light sources, the WaveTester's Auto-testing feature allows user to test two wavelengths simultaneously, cutting testing time nearly in half. Up to 200 test results can be internally stored in the WaveTester, which can then be later downloaded to a PC running OWL Reporter software using the supplied USB cable. OWL's user-friendly Link Wizard walks the user through the key parameters of the link under test — cabling standard, fiber type, fiber length, patch panels, splices, etc. — indicating a PASS or FAIL test result. Certification reports can then be printed, and data can be stored on hard disk for later retrieval.

### Related Accessories

Battery Chargers

see page 41

Cleaners

see page 40

Encircled Flux Cables

see page 42

Universal Adapters

see page 44



Shown here: KIT-WT-WSMDSxx



Factory located in the  
Heartland of America



## Optical Power Meter

## SINGLEMODE / MULTIMODE



The ZOOM 2 is a highly accurate hand-held optical power meter, capable of measuring optical power and optical loss in a wide range of test environments, including LAN, MAN, WAN, Telco, CATV, Manufacturing, and Laboratory. A 2.5mm universal and 1.25mm universal connector port are included to connect to a wide variety of popular fiber optic connectors, including SC, ST, FC, LC, MU, and other SFF.

The ZOOM 2 is encased in high-impact plastic, and a protective rubber boot provides additional shock protection. Its easy-to-read 4-digit LCD display shows optical power in dBm and dB, selected wavelength, and battery power, and it has an intuitive 2-button interface for controlling power ON/OFF and wavelength selection.

As an option, a visual fault locator (VFL) can be integrated into the ZOOM 2. VFLs are useful for locating faults behind patch panels, and for identifying optical ports at the far end of a fiber link.

| Key Specifications                  |                                                       |
|-------------------------------------|-------------------------------------------------------|
| Detector Type                       | InGaAs                                                |
| Calibrated Wavelengths <sup>1</sup> | 850, 1300, 1310, 1490, 1550                           |
| Measurement Range                   | +5 to -60 dBm                                         |
| Accuracy                            | ±0.20 dB                                              |
| Display Resolution                  | 0.01 dB                                               |
| Battery Life                        | Up to 1000 hours (Re-chargeable Lithium Polymer)      |
| Connector Type                      | 2.5mm/1.25mm universal                                |
| Measurement Units                   | dBm, dB, mW, µW                                       |
| Display Type                        | LCD                                                   |
| Auto-shutdown                       | Yes                                                   |
| Operating Temperature               | -10 to 55° C                                          |
| Storage Temperature                 | -30 to 70° C                                          |
| Dimensions                          | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |
| Weight                              | 10 oz. (284g)                                         |


1: Bold wavelengths are NIST Traceable  
Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                      |             |
|----------------------|-------------|
| Universal Adapters   | see page 44 |
| Battery Chargers     | see page 41 |
| Cleaning Accessories | see page 40 |



Factory located in the  
Heartland of America



### Pricing

|        |                                |        |
|--------|--------------------------------|--------|
| ZO-2   | ZOOM 2 optical power meter     | 320.00 |
| ZO-2V† | ZOOM 2 VFL optical power meter | 540.00 |

### Applications

- Optical power measurement
- Optical loss (attenuation) measurement
- Patch cord verification
- FTTx link loss verification

### Features


- InGaAs photodetector
- Multimode and singlemode ready
- Universal detector port supports 2.5mm and 1.25mm connectors
- Set reference ("zeroing") function
- Display absolute and relative power measurements in dBm, dB, and W
- Over 250 hours battery life (9V)
- NIST Traceable
- Optional integrated visual fault locator (VFL) port

† includes integrated visual fault locator (VFL) port

\* requires additional light source

### Light Sources\*

- Dual OWL (Multimode) page 32
- Laser OWL (Singlemode) page 34

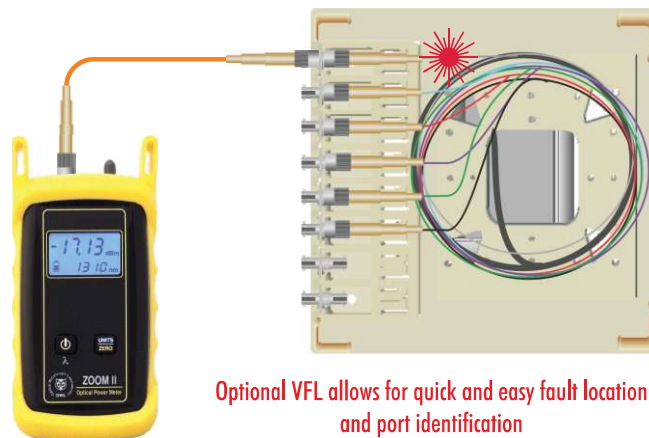

Optional VFL allows for quick and easy fault location  
and port identification



## Fiber Optic Test Kits

## SINGLEMODE / MULTIMODE

### Pricing

| Model <sup>1</sup>   | Power Meter        | Light Source <sup>1</sup> | Multimode       | Singlemode       | Auto Test <sup>2</sup> | Length <sup>3</sup> | Integrated VFL <sup>4</sup> | Price <sup>5</sup> |
|----------------------|--------------------|---------------------------|-----------------|------------------|------------------------|---------------------|-----------------------------|--------------------|
| KIT-Z2-D285xx        | ZO-2               | D02-85xx                  | 850nm           | —                | —                      | —                   | —                           | 500.00             |
| KIT-Z2-D2xx          | ZO-2               | D02xx                     | 850nm<br>1300nm | —                | —                      | —                   | —                           | 750.00             |
| KIT-Z2-L213xx        | ZO-2               | L02-13xx                  | —               | 1310nm           | —                      | —                   | —                           | 710.00             |
| KIT-Z2-L2xx          | ZO-2               | L02xx                     | —               | 1310nm<br>1550nm | —                      | —                   | —                           | 1060.00            |
| KIT-Z2-D285xx-L213xx | ZO-2               | D02-85xx                  | 850nm           | —                | —                      | —                   | —                           | 915.00             |
|                      |                    | L02-13xx                  | —               | 1310nm           |                        |                     |                             |                    |
| KIT-Z2-D2xx-L2xx     | ZO-2               | D02xx                     | 850nm<br>1300nm | —                | —                      | —                   | —                           | 1505.00            |
|                      |                    | L02xx                     | —               | 1310nm<br>1550nm |                        |                     |                             |                    |
| KIT-Z2S-D285xx       | ZO-2S <sup>6</sup> | D02-85xx                  | 850nm           | —                | —                      | —                   | —                           | 385.00             |

1 xx : specify ST or SC depending upon preferred light source connector type.

2 Auto-testing allows users to measure two wavelengths simultaneously.

3 Stand-alone optical length testers can be purchased separately. Contact OWL for more information.

4 Light source includes integrated visual fault locator (VFL) port. VFLs can also be integrated into ZOOM 2 Series optical power meters, or purchased as a separate unit. Contact OWL for more information.

5 Price shown in US Dollars (USD).

6 ZO-2S optical power meters are calibrated at 650, 850, and 980nm.

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Applications

- Optical loss (attenuation) measurement
- FTTx link verification
- Patch cord verification

### Features

- Economical option for quick attenuation (loss) measurement of multimode and/or singlemode networks
- Easy-to-read 4-digit 7-segment LCD display
- Stores reference values for all calibrated wavelengths
- Intuitive 2-button interface
- On-screen wavelength, measurement units, and low battery indicator
- NIST Traceable

### Description

ZOOM 2 Series test kits are ideal for fiber optic professionals who require quick and easy optical power and loss measurements of multimode and/or singlemode networks. The easy-to-read LCD display shows optical power/loss measurements in dBm, dB, mW, and uW, as well as selected wavelength and battery indicator. The intuitive 2-button interface on both units allow for easy wavelength selection and setting of optical references (or “zeroing”). References can be set for all calibrated wavelengths.

### Related Accessories

Battery Chargers


see page 41

Cleaners


see page 40

Universal Adapters

see page 44



Factory located in the  
Heartland of America



### FIBER OPTIC LIGHT SOURCE COMPARISON CHART

| Light Source                           | DUAL OWL                 | DUAL OWL PRO    | LASER OWL       | LASER OWL PRO   | WAVESOURCE             | WAVESOURCE PRO  |
|----------------------------------------|--------------------------|-----------------|-----------------|-----------------|------------------------|-----------------|
|                                        | page 32                  | page 31         | page 34         | page 33         | page 30                | page 29         |
|                                        | FEATURES                 |                 |                 |                 |                        |                 |
| NIST Traceable                         | ✓                        | ✓               | ✓               | ✓               | ✓                      | ✓               |
| Connector Type                         | SC, ST                   |                 | SC, ST, FC      |                 |                        |                 |
| Multimode                              | ✓                        | ✓               |                 |                 | ✓                      | ✓               |
| Singlemode                             |                          |                 | ✓               | ✓               | ✓                      | ✓               |
| Quad                                   |                          |                 |                 |                 | ✓                      | ✓               |
| Wavelength Auto-switching              |                          |                 |                 |                 | ✓                      | ✓               |
| Optional VFL<br>(on single-port units) | ✓                        | ✓               | ✓               | ✓               | ✓                      | ✓               |
| Display                                | 7-segment LED            |                 |                 |                 |                        |                 |
| Battery                                | Li Polymer Re-chargeable |                 |                 |                 |                        |                 |
| Battery Life                           | up to 120 hours          | up to 150 hours | up to 120 hours | up to 150 hours | up to 120 hours        | up to 150 hours |
| Dimensions                             | 4.94 x 2.75 x 1.28 in.   |                 |                 |                 | 2.87 x 4.42 x 1.25 in. |                 |
| Weight                                 | 10 ounces                |                 |                 |                 |                        |                 |

### LIGHT SOURCE WAVELENGTH SPECIFICATIONS

| Fiber Type           | Multimode Sources |             | Singlemode Sources |             |
|----------------------|-------------------|-------------|--------------------|-------------|
| Transmitter Type     | LED               |             | FP Laser           |             |
| Output Power         | -20 dBm           |             | -10 dBm            |             |
| Initial Accuracy     | ± 0.1 dB          |             | ± 0.1 dB           |             |
| Center Wavelength    | 850 ± 30nm        | 1300 ± 50nm | 1310 ± 20nm        | 1550 ± 30nm |
| Spectral Width       | 50nm              | 180nm       | 2nm                | 2nm         |
| Typical 1-hour Drift | 0.05 dB           | 0.05 dB     | 0.05 dB            | 0.04 dB     |

### TEST KIT INFORMATION

|                | ZOOM 2 SERIES | WAVETESTER SERIES | INSTALLER SERIES | FIBER OWL 7 SERIES | FIBER OWL 7X SERIES | FIBER OWL 7V SERIES | FIBER OWL 7+ SERIES |
|----------------|---------------|-------------------|------------------|--------------------|---------------------|---------------------|---------------------|
|                | page 27       | page 25           | page 16          | page 23            | page 21             | page 19             | page 14,15          |
| Dual OWL       | ✓             | ✓                 |                  |                    |                     |                     |                     |
| Dual OWL Pro   |               |                   |                  | ✓                  | ✓                   | ✓                   |                     |
| Laser OWL      | ✓             | ✓                 |                  |                    |                     |                     |                     |
| Laser OWL Pro  |               |                   |                  | ✓                  | ✓                   | ✓                   |                     |
| WaveSource     |               | ✓                 |                  |                    |                     |                     |                     |
| WaveSource Pro |               |                   | ✓                | ✓                  | ✓                   | ✓                   | ✓                   |

## Fiber Optic Light Source

## SINGLEMODE / MULTIMODE

### Description

WaveSource Pro series fiber optic light sources offer fiber optic professionals a cost-effective option for high quality multimode and/or singlemode fiber testing in a compact, handheld package, include a quad-wave version with all four wavelengths in the same unit!

The sources are simple to operate with an intuitive four-button interface controlling power, port selection, transmission mode, and wavelength/AUTO selection.

When used with Fiber OWL 7 series power meters, AUTO mode allows simultaneous dual-wavelength testing, cutting testing time in half over single-wavelength sources.

LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

WaveSource Pro series light sources come configured with SC connector ports (other connector types available upon request), as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



WaveSource Pro

### Pricing

| WaveSource Series Light Sources |            |    |     |         |
|---------------------------------|------------|----|-----|---------|
| Model #                         | Fiber Type |    | VFL | Price   |
|                                 | MM         | SM |     |         |
| WPMS                            | ●          | ●  |     | 1645.00 |
| WPMX                            | ●          |    |     | 455.00  |
| WPMV                            | ●          |    | ●   | 675.00  |
| WPSX                            |            | ●  |     | 1225.00 |
| WPSV                            |            | ●  | ●   | 1445.00 |

### Features

- Multimode, Singlemode, Quad, and VFL options
- Temperature-stabilized output
- Multimode: 850/1300nm (50 & 62.5 μm)
- Singlemode: 1310/1550nm
- Quad: 850/1300/1310/1550nm
- AUTO wavelength switching
- SC connectors (other types available upon request)
- Intuitive 4-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option

### Included in the following test kits:

- Fiber OWL 7 series page 23
- Fiber OWL 7X series page 21
- Fiber OWL 7V series page 19
- Fiber OWL 7+ series page 14, 15
- Installer Series page 16

| Key Specifications    |                                                 |                                                |
|-----------------------|-------------------------------------------------|------------------------------------------------|
| Output Type           | Multimode                                       | Singlemode                                     |
| Launch Method         | LED                                             | FP Laser                                       |
| Center Wavelength     | 850 nm: 850 ± 30 nm<br>1300 nm: ± 50 nm         | 1310 nm: 1310 ± 20 nm<br>1550 nm: 1550 ± 30 nm |
| Spectral Width        | 850 nm: 50 nm<br>1300 nm: 180 nm                | 1310 nm: 2 nm<br>1550 nm: 2 nm                 |
| Output Power          | -20 dBm                                         | -10 dBm                                        |
| Output Modes          | CW / Modulated                                  | CW / Modulated                                 |
| Initial Accuracy      | ± 0.1 dB                                        | ± 0.1 dB                                       |
| Battery Life          | Up to 150 hours (Rechargeable Li Polymer)       |                                                |
| Operating Temperature | 0 to 55° C                                      |                                                |
| Storage Temperature   | 0 to 75° C                                      |                                                |
| Dimensions            | 2.87 x 4.42 x 1.25 in. (72.9 x 112.3 x 31.8 mm) |                                                |
| Weight                | 10 oz. (284g)                                   |                                                |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |



Factory located in the  
Heartland of America





## Fiber Optic Light Source

## SINGLEMODE / MULTIMODE

### Description

WaveSource series fiber optic light sources offer fiber optic professionals a cost-effective option for high quality multimode and/or singlemode fiber testing in a compact, handheld package, include a quad-wave version with all four wavelengths in the same unit!

The sources are simple to operate with an intuitive four-button interface controlling power, port selection, transmission mode, and wavelength/AUTO selection.

When used with Fiber OWL 4, Micro OWL 2, and WaveTester power meters, AUTO mode allows simultaneous dual-wavelength testing, cutting testing time in half over single-wavelength sources.

LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

WaveSource series light sources come configured with your choice of SC, ST, or FC connector ports, as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



WaveSource

### Pricing

#### WaveSource Series Light Sources

| Model #    | Fiber Type |    | VFL | Price   |
|------------|------------|----|-----|---------|
|            | MM         | SM |     |         |
| WS-MDSDxx* | ●          | ●  |     | 1620.00 |
| WS-MDxx*   | ●          |    |     | 425.00  |
| WS-MDVxx*  | ●          |    | ●   | 645.00  |
| WS-SDxx*   |            | ●  |     | 1195.00 |
| WS-SDVxx*  |            | ●  | ●   | 1415.00 |

### Features

- Multimode, Singlemode, Quad, and VFL options
- Temperature-stabilized output
- Multimode: 850/1300nm (50 & 62.5 μm)
- Singlemode: 1310/1550nm
- Quad: 850/1300/1310/1550nm
- AUTO wavelength switching
- SC, ST, or FC connector options\*
- Intuitive 4-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option

### Included in the following test kits:

- WaveTester series page 25

### Key Specifications

| Output Type           | Multimode                                             | Singlemode                                     |
|-----------------------|-------------------------------------------------------|------------------------------------------------|
| Launch Method         | LED                                                   | FP Laser                                       |
| Center Wavelength     | 850 nm: 850 ± 30 nm<br>1300 nm: ± 50 nm               | 1310 nm: 1310 ± 20 nm<br>1550 nm: 1550 ± 30 nm |
| Spectral Width        | 850 nm: 50 nm<br>1300 nm: 180 nm                      | 1310nm: 2 nm<br>1550nm: 2 nm                   |
| Output Power          | -20 dBm                                               | -10 dBm                                        |
| Output Modes          | CW / Modulated                                        | CW / Modulated                                 |
| Initial Accuracy      | ± 0.1 dB                                              | ± 0.1 dB                                       |
| Battery Life          | Up to 120 hours (Rechargeable Li Polymer)             |                                                |
| Operating Temperature | 0 to 55° C                                            |                                                |
| Storage Temperature   | 0 to 75° C                                            |                                                |
| Dimensions            | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |                                                |
| Weight                | 10 oz. (284g)                                         |                                                |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |



Factory located in the  
Heartland of America



## Fiber Optic Light Source

**MULTIMODE**

### Description

Dual OWL Pro series fiber optic light sources offer fiber optic professionals a cost-effective option for high quality multimode fiber testing in a compact, handheld package.

The temperature-compensated outputs are calibrated to couple -20dBm of optical power into multimode fiber. Light source options are offered with either 850nm or 1300nm, or both 850nm and 1300nm sources installed. Single-port versions can also include a VFL option.

The sources are simple to operate with an intuitive two-button interface controlling power and port selection. LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

Dual OWL Pro series light sources come configured with your choice of SC or ST connector ports, as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



Dual OWL Pro

### Pricing

| Dual OWL Pro Series Multimode Light Sources |           |      |     |        |
|---------------------------------------------|-----------|------|-----|--------|
| Model #                                     | Wave (nm) |      | VFL | Price  |
|                                             | 850       | 1300 |     |        |
| DP8X                                        | ●         |      |     | 210.00 |
| DP8V                                        | ●         |      | ●   | 430.00 |
| DP3X                                        |           | ●    |     | 375.00 |
| DP3V                                        |           | ●    | ●   | 595.00 |
| DP83                                        | ●         | ●    |     | 455.00 |

### Features

- Multimode LED Source
- Temperature-stabilized output
- 850 and/or 1300nm wavelength options
- Integrated VFL option (single-wave sources only)
- SC connectors
- Intuitive 2-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option

### Included in the following test kits:

- Fiber OWL 7 series page 23

### Key Specifications

| Series                | Dual OWL Pro Series                             |
|-----------------------|-------------------------------------------------|
| Fiber Type            | Multimode                                       |
| Launch Method         | LED                                             |
| Center Wavelength     | 850 nm: 850 ± 30 nm<br>1300 nm: 1300 ± 50 nm    |
| Spectral Width        | 850 nm: 50 nm<br>1300 nm: 180 nm                |
| Output Power          | -20 dBm                                         |
| Initial Accuracy      | 0.1 dB                                          |
| Battery Life          | up to 150 hours (Re-chargeable Lithium Polymer) |
| Operating Temperature | 0 to 55° C                                      |
| Storage Temperature   | 0 to 75° C                                      |
| Dimensions            | 2.87 x 4.42 x 1.25 in. (72.9 x 112.3 x 31.8 mm) |
| Weight                | 10 oz. (284g)                                   |


Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |



Factory located in the  
Heartland of America



## Fiber Optic Light Source

## MULTIMODE

### Description

Dual OWL series fiber optic light sources offer fiber optic professionals a cost-effective option for high quality multimode fiber testing in a compact, handheld package.

The temperature-compensated outputs are calibrated to couple -20dBm of optical power into multimode fiber. Light source options are offered with either 850nm or 1300nm, or both 850nm and 1300nm sources installed. Single-port versions can also include a VFL option.

The sources are simple to operate with an intuitive two-button interface controlling power and port selection. LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

Dual OWL series light sources come configured with your choice of SC or ST connector ports, as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



Dual OWL

### Pricing

| Dual OWL Series Multimode Light Sources |           |      |     |        |
|-----------------------------------------|-----------|------|-----|--------|
| Model #                                 | Wave (nm) |      | VFL | Price  |
|                                         | 850       | 1300 |     |        |
| D02-85st                                | ●         |      |     | 175.00 |
| D02-85Vst                               | ●         |      | ●   | 375.00 |
| D02-85sc                                | ●         |      |     | 205.00 |
| D02-85Vsc                               | ●         |      | ●   | 405.00 |
| D02-13st                                |           | ●    |     | 360.00 |
| D02-13Vst                               |           | ●    | ●   | 560.00 |
| D02-13sc                                |           | ●    |     | 375.00 |
| D02-13Vsc                               |           | ●    | ●   | 575.00 |
| D02st                                   | ●         | ●    |     | 425.00 |
| D02sc                                   | ●         | ●    |     | 465.00 |

### Features

- Multimode LED Source
- Temperature-stabilized output
- 850 and/or 1300nm wavelength options
- Integrated VFL option (single-wave sources only)
- ST or SC connector options
- Intuitive 2-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option

### Included in the following test kits:

- ZOOM 2 series page 27
- WaveTester series page 25

| Key Specifications    |                                                       |
|-----------------------|-------------------------------------------------------|
| Series                | Dual OWL Series                                       |
| Fiber Type            | Multimode                                             |
| Launch Method         | LED                                                   |
| Center Wavelength     | 850 nm: 850 ± 30 nm<br>1300 nm: 1300 ± 50 nm          |
| Spectral Width        | 850 nm: 50 nm<br>1300 nm: 180 nm                      |
| Output Power          | -20 dBm                                               |
| Initial Accuracy      | 0.1 dB                                                |
| Battery Life          | up to 120 hours (Re-chargeable Lithium Polymer)       |
| Operating Temperature | 0 to 55° C                                            |
| Storage Temperature   | 0 to 75° C                                            |
| Dimensions            | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |
| Weight                | 10 oz. (284g)                                         |


Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

|                       |             |
|-----------------------|-------------|
| Battery Chargers      | see page 41 |
| Cleaners              | see page 40 |
| Encircled Flux Cables | see page 42 |



Factory located in the  
Heartland of America





## Fiber Optic Light Source

## SINGLEMODE

### Description

Laser OWL Pro series fiber optic laser sources offer fiber optic professionals a cost-effective option for high quality singlemode fiber testing in a compact, handheld package.

The temperature-compensated outputs are calibrated to couple -10dBm of optical power into singlemode fiber. Light source options are offered with either 1310nm or 1550nm, or both 1310nm and 1550nm sources installed. Single-port versions can also include a VFL option. High-power versions (0 dBm) are available.

The sources are simple to operate with an intuitive two-button interface controlling power and port selection. LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

Laser OWL Pro series light sources come configured with your choice of SC, ST, or FC connector ports, as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



Laser OWL Pro

### Pricing

| Laser OWL Pro Series Singlemode Laser Sources |           |      |     |         |
|-----------------------------------------------|-----------|------|-----|---------|
| Model #                                       | Wave (nm) |      | VFL | Price   |
|                                               | 1310      | 1550 |     |         |
| LP3X                                          | ●         |      |     | 465.00  |
| LP3V                                          | ●         |      | ●   | 685.00  |
| LP5X                                          |           | ●    |     | 560.00  |
| LP5V                                          |           | ●    | ●   | 780.00  |
| LP35                                          | ●         | ●    |     | 1225.00 |
| High-power (0 dBm) Option                     |           |      |     |         |
| LP3X-HP                                       | ●         |      |     | 905.00  |
| LP3V-HP                                       | ●         |      | ●   | 1125.00 |
| LP5X-HP                                       |           | ●    |     | 1125.00 |
| LP5V-HP                                       |           | ●    | ●   | 1345.00 |
| LP35-HP                                       | ●         | ●    |     | 1625.00 |

### Features

- Singlemode Laser Source
- Temperature-stabilized output
- 1310 and/or 1550nm wavelength options
- High-power (0 dBm) versions available
- Integrated VFL option (single-wave sources only)
- SC, ST, or FC connector options
- Intuitive 2-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option

### Included in the following test kits:

- Fiber OWL 7 series page 23

| Key Specifications    |                                                    |
|-----------------------|----------------------------------------------------|
| Series                | Laser OWL Pro Series                               |
| Fiber Type            | Singlemode                                         |
| Launch Method         | FP Laser                                           |
| Center Wavelength     | 1310 nm: 1310 ± 20 nm<br>1550 nm: 1550 ± 30 nm     |
| Spectral Width        | 1310 nm: 2 nm<br>1550 nm: 2 nm                     |
| Output Power          | -10 dBm                                            |
| Initial Accuracy      | 0.1 dB                                             |
| Battery Life          | up to 150 hours (Re-chargeable Lithium Polymer)    |
| Operating Temperature | 0 to 55° C                                         |
| Storage Temperature   | 0 to 75° C                                         |
| Dimensions            | 2.87 x 4.42 x 1.25 inches (72.9 x 112.3 x 31.8 mm) |
| Weight                | 10 oz. (284g)                                      |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.


### Related Accessories

Battery Chargers  
Cleaners

see page 41  
see page 40



Factory located in the  
Heartland of America



## Fiber Optic Light Source

## SINGLEMODE

### Description

Laser OWL series fiber optic laser sources offer fiber optic professionals a cost-effective option for high quality singlemode fiber testing in a compact, handheld package.

The temperature-compensated outputs are calibrated to couple -10dBm of optical power into singlemode fiber. Light source options are offered with either 1310nm or 1550nm, or both 1310nm and 1550nm sources installed. Single-port versions can also include a VFL option. High-power versions (0 dBm) are available.

The sources are simple to operate with an intuitive two-button interface controlling power and port selection. LED indicators highlight the selected source port and verify that battery power is sufficient to maintain the calibrated output power. Wavelength is indicated by 7-segment LED display.

Laser OWL series light sources come configured with your choice of SC, ST, or FC connector ports, as well as a protective rubber boot, re-chargeable Lithium Polymer battery and charger, NIST-traceable certificate of calibration, and CD-ROM with operations manual.



Laser OWL

### Key Specifications

| Series                | Laser OWL Series                                      |
|-----------------------|-------------------------------------------------------|
| Fiber Type            | Singlemode                                            |
| Launch Method         | FP Laser                                              |
| Center Wavelength     | 1310 nm: 1310 ± 20 nm<br>1550 nm: 1550 ± 30 nm        |
| Spectral Width        | 1310 nm: 2 nm<br>1550 nm: 2 nm                        |
| Output Power          | -10 dBm                                               |
| Initial Accuracy      | 0.1 dB                                                |
| Battery Life          | up to 120 hours (Re-chargeable Lithium Polymer)       |
| Operating Temperature | 0 to 55° C                                            |
| Storage Temperature   | 0 to 75° C                                            |
| Dimensions            | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |
| Weight                | 10 oz. (284g)                                         |


Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

Battery Chargers see page 41  
Cleaners see page 40



Factory located in the  
Heartland of America



### Pricing

#### Laser OWL Series Singlemode Laser Sources

| Model #   | Wave (nm) |      | VFL | Price  |
|-----------|-----------|------|-----|--------|
|           | 1310      | 1550 |     |        |
| L02-13xx  | ●         |      |     | 435.00 |
| L02-13Vxx | ●         |      | ●   | 635.00 |
| L02-15xx  |           | ●    |     | 530.00 |
| L02-15Vxx |           | ●    | ●   | 730.00 |
| L02xx     | ●         | ●    |     | 795.00 |

#### High-power (0 dBm) Option

|              |   |   |   |         |
|--------------|---|---|---|---------|
| L02-13xx-HP  | ● |   |   | 875.00  |
| L02-13Vxx-HP | ● |   | ● | 1095.00 |
| L02-15xx-HP  |   | ● |   | 1095.00 |
| L02-15Vxx-HP |   | ● | ● | 1315.00 |
| L02xx-HP     | ● | ● |   | 1595.00 |

### Features

- Singlemode Laser Source
- Temperature-stabilized output
- 1310 and/or 1550nm wavelength options
- High-power (0 dBm) versions available
- Integrated VFL option (single-wave sources only)
- SC, ST, or FC connector options
- Intuitive 2-button interface
- Battery power indicator LED
- Re-chargeable Lithium Polymer battery
- NIST Traceable

### Applications

- Optical loss measurement\*
- Fiber optic link certification\*
- Visual fault location†
- Visual fiber identification†

\* When used with an optical power meter

† Requires VFL option


### Included in the following test kits:

- ZOOM 2 series page 27
- WaveTester series page 25


**Precision-Coupled Visual Fault Locator****SINGLEMODE / MULTIMODE****Description**

The PCVFL (precision-coupled visual fault locator) is a light-weight, hand-held fiber tester used to quickly troubleshoot faults in the near-end of both multimode and singlemode fibers, as well as for port identification and fiber continuity. The PCVFL holds its own against the best visual fault locators (VFL) in the industry.

As with any quality VFL, the PCVFL uses a precision-coupled laser diode to inject a maximum amount of optical energy into an optical fiber. A multi-million dollar semiconductor machine is used in the manufacture of a special precision coupled micro sized ball lens, which focuses the high-intensity red laser at the optimum point of the optical fiber core. Since low-cost laser light pens do not use precision-coupling optics, their red lasers are not focused at the correct point, and thus produce sub-par results.

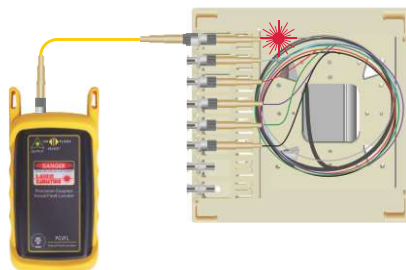**Visual Fault Location**

The PCVFL can be used as a troubleshooting tool to determine if there are breaks, micro-bends, or any other anomalies causing excessive loss within the first few feet of the fiber under test located in the splice tray. The laser diode in the PCVFL injects high-intensity red laser light into the near-end connector. If this light encounters any anomalies, such as a break or a micro-bend, the light is deflected into the fiber jacket, producing a red glow at the point of the anomaly. Some optical fiber jackets are colored so that it is difficult to see red light shining through, so it is recommended to keep the room light at a minimum when using the PCVFL for visual fault location.

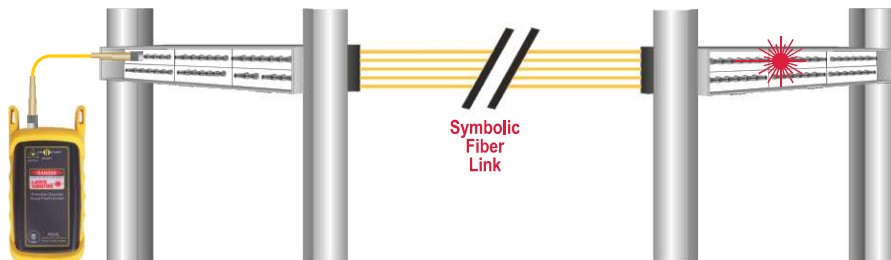**Port Identification****Related Accessories**

Cleaners

see page 40

**Pricing**

|         |                                        |        |
|---------|----------------------------------------|--------|
| PCVFL-1 | Precision-Coupled Visual Fault Locator | 325.00 |
|---------|----------------------------------------|--------|

**Applications**

- Visual Fault Location
- Visual Fiber Identification

**Features**

- 650nm laser source
- Multimode/singlemode ready
- Continuous Wave (CW) and flashing output modes
- Visual range: up to 5 kilometers
- 15 hour battery life
- Low battery indicator
- 2.5mm universal connector port



**Factory located in the  
Heartland of America**

**Warning**

Bright red visible laser radiation when power switch is set to the ON position – Avoid eye exposure to direct or scattered radiation



VFLs can help take the guesswork out of identifying ports in a fiber patch panel or checking polarity of a duplex connector. Connect the PCVFL to one end of a fiber link, and the high-intensity, precision-coupled red laser diode will allow the user to visually identify the port by the presence of a red glow emitting from the connector on the other end. The PCVFL allows for visual port identification of fiber optic links up to 5 kilometers (3.1 miles) away!



## Fiber Optic Talk Sets

**MULTIMODE**



### Description

HOOTS stands for High Output Optical Talk Set. HOOTS Series fiber optic talk sets convert your voice into optical signals and provide full-duplex communications using a pair of terminated multimode fibers, and offer a reliable alternative to wireless communications systems due to their electromagnetic immunity.

There are several advantages to using a fiber talk set versus wireless devices such as walkie talkies:

- 1) when I.T. personnel are setting up voice or data equipment, they may give away passwords and secret net addresses over un-secure walkie-talkie channels to a nearby neighborhood of listening ears;
- 2) everyone is buying these cheap walkie-talkies from the local discount stores, making it much more difficult to find free channels over the air waves; and
- 3) the noise and walls in many plants inhibit radio transmissions. Fiber communications is more secure and most of all, immune to the effects of EMI/RFI.

Two models are available: 850nm and 1300nm. Each set comes with a pair of headsets and headset adapters, hard-shell carrying case, protective rubber boots, 9-volt batteries, NIST-traceable certificate of calibration, and CD-ROM with operations manual.

| Key Specifications     |                                                       |              |
|------------------------|-------------------------------------------------------|--------------|
| Model                  | HO-850                                                | HO-1300      |
| Fiber Type             | Multimode                                             | Multimode    |
| Launch Method          | LED                                                   | LED          |
| Center Wavelength      | 850 + 30 / -10 nm                                     | 1300 ± 50 nm |
| Spectral Width         | 50 nm                                                 | 180 nm       |
| Output Power           | -20 dBm                                               |              |
| Receiver Dynamic Range | 20 dB (-20 to -40 dBm)                                |              |
| Battery Life           | up to 20 hours (9V)                                   |              |
| Operating Temperature  | 0 to 55° C                                            |              |
| Storage Temperature    | 0 to 75° C                                            |              |
| Dimensions (each unit) | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |              |
| Weight (full set)      | 32 oz. (907g)                                         |              |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

Cleaners see page 40

### Pricing

|         |                               |        |
|---------|-------------------------------|--------|
| HO-850  | HOOTS 850 multimode talk set  | 540.00 |
| HO-1300 | HOOTS 1300 multimode talk set | 990.00 |

### Applications

- Full duplex voice communications using a pair of multimode (50 & 62.5μm) optical fibers

### Features

- Each talkset includes a pair of talkset units
- Offers secure communications that is immune to EMI/RFI
- Automatic volume control
- Wide receiver dynamic range
- Long battery life
- Signal level indicator
- Battery level indicator
- 850nm or 1300nm option
- ST connectors
- Headsets and headset adapters included
- Intuitive operation

To calculate talkset distance:  $D = R / A$

where:  $D$  = talkset distance  
 $R$  = dynamic range (HOOTS = 20 dB)  
 $A$  = typical fiber attenuation at specified  $\lambda$

Example ( $\lambda$  = 1300nm,  $R$  = 20 dB,  $A$  = 1.0 dB/km):  
 $D = 20 \text{ dB} / (1.0 \text{ dB/km}) = 20 \text{ km}$



Factory located in the  
Heartland of America



## Fiber Optic Talk Sets

## SINGLEMODE



### Description

HOOTS stands for High Output Optical Talk Set. Laser HOOTS Series fiber optic talk sets convert your voice into optical signals and provide full-duplex communications using a pair of terminated singlemode fibers, and offer a reliable alternative to wireless communications due to their electromagnetic immunity.

There are several advantages to using a fiber talk set versus wireless devices such as walkie talkies:

- 1) when I.T. personnel are setting up voice or data equipment, they may give away passwords and secret net addresses over un-secure walkie-talkie channels to a nearby neighborhood of listening ears;
- 2) everyone is buying these cheap walkie-talkies from the local discount stores, making it much more difficult to find free channels over the air waves; and
- 3) the noise and walls in many plants inhibit radio transmissions. Fiber communications is more secure and most of all, immune to the effects of EMI/RFI.

Two models are available: 1310nm and 1550nm. Each set comes with a pair of headsets and headset adapters, hard-shell carrying case, protective rubber boots, 9-volt batteries, NIST-traceable certificate of calibration, and CD-ROM with operations manual.

| Key Specifications     |                                                       |              |
|------------------------|-------------------------------------------------------|--------------|
| Model                  | LH-1310                                               | LH-1550      |
| Fiber Type             | Singlemode                                            | Singlemode   |
| Launch Method          | FP Laser                                              | FP Laser     |
| Center Wavelength      | 1310 ± 20 nm                                          | 1550 ± 30 nm |
| Spectral Width         | 2 nm                                                  | 2 nm         |
| Output Power           | -10 dBm                                               |              |
| Receiver Dynamic Range | 20 dB (-10 to -30 dBm)                                |              |
| Battery Life           | up to 20 hours (9V)                                   |              |
| Operating Temperature  | 0 to 55° C                                            |              |
| Storage Temperature    | 0 to 75° C                                            |              |
| Dimensions (each unit) | 2.75 x 4.94 x 1.28 inches (69.85 x 125.48 x 32.51 mm) |              |
| Weight (full set)      | 32 oz. (907g)                                         |              |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

Cleaners see page 40

### Pricing

|         |                                      |         |
|---------|--------------------------------------|---------|
| LH-1310 | Laser HOOTS 1310 singlemode talk set | 1310.00 |
| LH-1550 | Laser HOOTS 1550 singlemode talk set | 1860.00 |

### Applications

- Full duplex voice communications using a pair of singlemode optical fibers

### Features

- Each talkset includes a pair of talkset units
- Offers secure communications that is immune to EMI/RFI
- Automatic volume control
- Wide receiver dynamic range
- Long battery life
- Signal level indicator
- Battery level indicator
- 1310nm or 1550nm option
- ST connectors
- Headsets and headset adapters included
- Intuitive operation

To calculate talkset distance:  $D = R/A$

where:  $D$  = talkset distance  
 $R$  = dynamic range (Laser HOOTS = 20 dB)  
 $A$  = typical fiber attenuation at specified  $\lambda$

Example ( $\lambda$  = 1310nm,  $R$  = 20 dB,  $A$  = 1.0 dB/km):  
 $D = 20 \text{ dB} / (1.0 \text{ dB/km}) = 20 \text{ km}$



Factory located in the  
Heartland of America



## Optical Length Testers

## SINGLEMODE / MULTIMODE



### Description

OWL optical length testers offers a unique, low-cost alternative for users who need to measure the length of optical fibers. Fiber installations are increasingly required to have fiber length measurements to comply with bid requirements. Rather than purchasing a costly new certification test set, these items can be added to an installer's existing fiber test kit. OWL length testers use a "round-robin" method of measuring fiber length. The round trip time that the light takes to travel through both fibers is converted to length in kilometers, then divided by two to show the end-to-end length of the fiber cable. This method of length testing provides accurate measurements, and saves time and money, since there is no need to measure the length of all the fibers; the length measurement can be applied to all fibers in the cable.

Optical measurement of fiber links is especially useful when cable jacket markings are not visible, or when the fiber link runs through multiple interconnects, requiring each segment to be inspected for jacket markings. Optical measurement of fiber produces accurate results without the need for jacket markings or manual length measurement.

| Key Specifications   |                                                    |                                                      |
|----------------------|----------------------------------------------------|------------------------------------------------------|
| Model                | BOLT-NL                                            | VOLT-1                                               |
| Output Type          | FP Laser                                           | Red Laser                                            |
| Output Wavelength    | 1310nm                                             | 650nm                                                |
| Measurement Range    | up to 25 kilometers                                | up to 1.5 kilometers                                 |
| Fiber Type           | Multimode / Singlemode                             |                                                      |
| Display Resolution   | 0.001 km                                           |                                                      |
| Measurement Accuracy | ± 2.5 meters                                       |                                                      |
| Connector Type       | ST                                                 |                                                      |
| Display Type         | 4-digit red LED                                    |                                                      |
| Battery Life         | Up to 10 hours (9V)                                |                                                      |
| Dimensions           | 2.75 x 4.94 x 1.28 inches (69.9 x 125.5 x 32.5 mm) |                                                      |
| Weight               | 10 oz. (284g)                                      |                                                      |
| Additional Function  | 2 kHz tone for use with Live Fiber Identifiers     | Visual fault location<br>Visual fiber identification |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

### Related Accessories

Cleaners

see page 40

### Pricing

|         |                               |        |
|---------|-------------------------------|--------|
| BOLT-NL | Bearing Optical Length Tester | 635.00 |
| VOLT-1  | Visual Optical Length Tester  | 435.00 |

### Applications

#### BOLT-NL

- Optical length measurement
- 2 kHz tone for use with Live Fiber Identifiers

#### VOLT-1

- Optical length measurement
- Visual Fault Locator (VFL)
- Visual Fiber Identification

**APPLICATION NOTE:** To avoid confusion, OWL optical length testers are NOT designed to measure distance to a fault like an OTDR.

OWL optical length testers are designed to measure the end-to-end length of a fiber cable. A pair of terminated fibers — looped back at the far end of the cable — are required for end-to-end fiber cable length measurement.

Watch OWL's "OPTICAL LENGTH MEASUREMENT" video (T1052) for more information about optical length measurement methods.

### Features

#### BOLT-NL

- Measures the length of both multimode and singlemode fibers up to 25 kilometers
- ± 2.5 meter accuracy
- Generates a 2 kHz tone for use with fiber identifiers

#### VOLT-1

- Measures the length of both multimode and singlemode fibers up to 1.5 kilometers
- ± 2.5 meter accuracy
- Red laser doubles as visual fault locator and visual fiber identifier



Factory located in the  
Heartland of America



**400x Fiber Optic Field Inspection Microscope**
**SINGLEMODE / MULTIMODE**
**400x Singlemode / Multimode Field Inspection Scope**

A dependable connector endface inspection scope is a vital part of any fiber optic professional's tool kit. Inspecting patch cord connector endfaces before attaching them to equipment or patch panels saves time and effort, and ensures a clean, quality connection. This 400x fiber inspection scope is an excellent low-cost option for inspecting both multimode and singlemode fiber connectors, and includes a protective infrared (IR) filter designed for eye safety. Connector adapters for 2.5 and 1.25mm ferrule diameters are also included.

**Pricing**

|       |                                         |        |
|-------|-----------------------------------------|--------|
| FS400 | 400X fiber optic field inspection scope | 140.00 |
|-------|-----------------------------------------|--------|

**Features**


- 400x magnification
- Multimode and singlemode fiber connector inspection
- PC, UPC, and APC
- Protective IR filter for eye safety
- 2.5mm and 1.25mm ferrule adapters


**400x USB Video Inspection Scope**

A dependable connector endface inspection scope is a vital part of any fiber optic professional's tool kit. Inspecting patch panels or equipment ports before connecting a patch cable ensures a clean, quality connection. The VS400-U video inspection scope allows users to view connector endfaces on a PC or laptop screen, preventing harmful invisible light from entering the users eye, and ensuring maximum eye protection, while showing fiber endface anomalies in great detail. Images are stored on hard disk, and can be retrieved for later playback. These endface images can also be imported into certification and/or OTDR results in OWLView software to ensure endface quality meets the requirements of the IEC 61300-3-35 endface quality standard.

**Features**

- 400x magnification for use in both multimode and singlemode fiber endface analysis
- High level of eye safety since the user does not directly view the fiber endface
- Endfaces can be viewed on PC or laptop screen, enabling greater viewing detail
- Endfaces can be recorded on PC for later playback

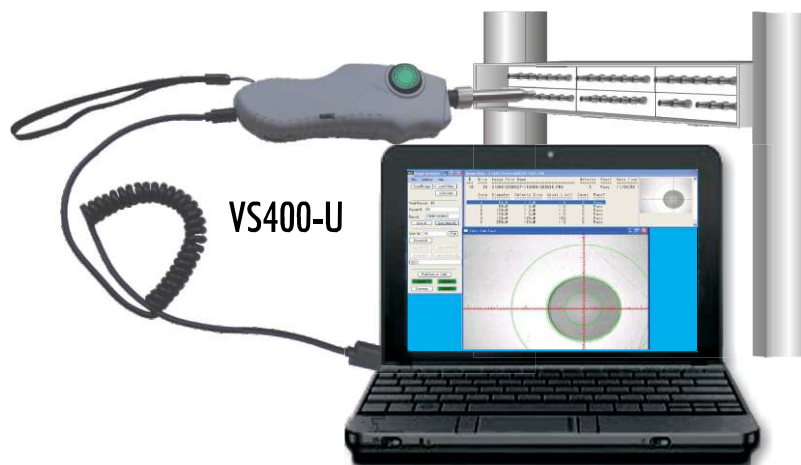**HELPS PREVENT EYE INJURY**


(laptop not included)

**LETS YOU SEE INSIDE PATCH PANEL!**
**Pricing**

|                               |                                 |         |
|-------------------------------|---------------------------------|---------|
| VS400-U                       | 400x USB video inspection scope | 1315.00 |
| Quantity discounts negotiable |                                 |         |

## Cleaning Accessories

## ACCESSORIES


### Cleaning Supplies

Dirty patch cord connectors and equipment ports can cause unreliable test results, thus it is vitally important to keep connectors and ports clean. Cleanliness is especially important during OTDR and Optical Return Loss (ORL) measurements. OWL offers cleaning supplies to ensure that patch cords and equipment ports are kept clean, thus ensuring accurate and reliable test results.

### Ferrule Connector Cleaners

The OWL connector ferrule cleaner is used to clean the endface of a fiber optic connector. Each FCC-2 and FCC-2R can be used for up to 500 wipes.

| Pricing |                             |       |
|---------|-----------------------------|-------|
| FCC-2   | OWL fiber connector cleaner | 50.00 |
| FCC-2R  | Tape refill for FCC-2       | 20.00 |

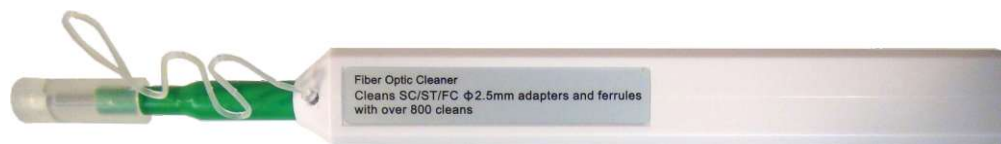

**OC-2**



**OC-1**

### In-adapter Ferrule Cleaners

OC series pen-style in-adapter ferrule cleaners implement a new popular and innovative product design for cleaning inside connector ports. Models include a version for 2.5mm ports, and one for 1.25mm ports.

| Pricing |                                   |       |
|---------|-----------------------------------|-------|
| OC-2    | 2.5mm in-adapter ferrule cleaner  | 50.00 |
| OC-1    | 1.25mm in-adapter ferrule cleaner | 60.00 |


## Miscellaneous Accessories

## ACCESSORIES

### Download Cables

**USB-1** OWLTrek OTDRs, and Fiber OWL 4, Micro OWL 2, and WaveTester optical power meters come configured with a USB port for connection to a PC for downloading data.

**DB9-D** Previous models of certain OWL optical power meters use this RS-232 serial cable for connection to a PC for downloading stored data. The meter connection is a 1/8" phono plug, and the PC connection is a DB9 female serial connector.

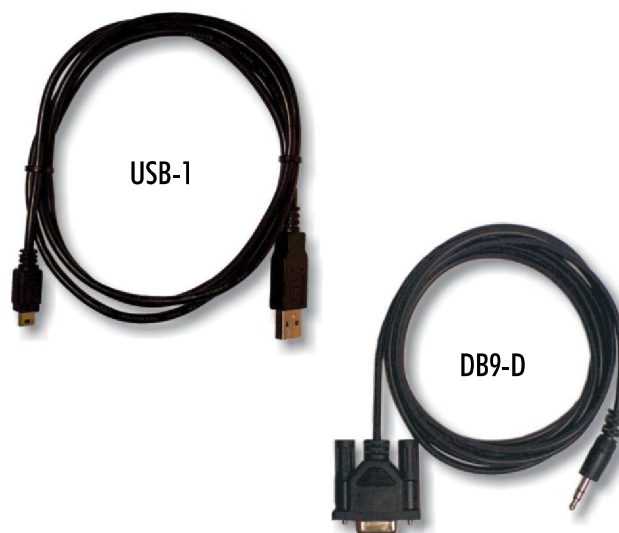

| Pricing |                                |       |
|---------|--------------------------------|-------|
| USB-1   | Replacement USB download cable | 9.00  |
| DB9-D   | Duplex serial download cable   | 15.00 |



**WS-USB**  
(appearance may vary)



### Power Transformers

**WS-USB** USB power charger (USB-1 cable not included)

Certain legacy models of OWL test equipment are equipped with a non-USB charger port that can be used for continuous wall operation or for charging rechargeable 9V batteries.

**WS-9V-1.3** Fiber OWL 4 BOLT series power meters, and Dual OWL, Laser OWL, and WaveSource light sources

**WS-9V-2.1** ZOOM 2, WaveTester and Micro OWL 2 series power meters

**CAUTION:** using transformers while non-rechargeable batteries are installed may produce an unsafe condition, and may cause harm to the equipment or the user.

| Pricing   |                                     |       |
|-----------|-------------------------------------|-------|
| WS-USB    | USB wall transformer (US only)      | 20.00 |
| WS-9V-1.3 | 9v wall transformer (US only)-1.3mm | 20.00 |
| WS-9V-2.1 | 9v wall transformer (US only)-2.1mm | 20.00 |



## Reference Cables

## MULTIMODE

### Encircled Flux Mode Controller Cables

Encircled Flux is a recent evolution in standards-based multimode fiber testing developed as an attempt to further decrease uncertainty between optical loss measurements taken with different manufacturer's test equipment, or with the same test equipment but at a different time.

Encircled Flux-compliant testing requires a special multimode reference cable called a Mode Controller that ensures light exiting any EF-compliant Mode Controller reference cable always has a consistent modal pattern, no matter which manufacturer's multimode light source was used.

The use of EF-compliant test cables is typically focused on testing OM3/OM4 multimode fiber networks running at 10-gigabit or greater, and usually only when a cabling standard specifies it. Technicians should consult customer documents or applicable cabling standards to verify if EF-compliant testing is required.

However, EF-compliant testing can be performed on any multimode network provided the correct mode controller cable is used.



| Pricing                                                      |                                                         |                                                                   |        |
|--------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------|--------|
| Core Size Options                                            | Input Connector Options<br>(connection to light source) | Output Connector Options<br>(connection to link or extender cord) | Price  |
| M5 = 50/125<br>M6 = 62.5/125                                 | SC LC ST                                                | SC LC ST                                                          | 690.00 |
| Part #: EF-core size-input-output<br>(example: EF-M5-SC-LC ) |                                                         |                                                                   |        |

### Encircled Flux Extender Cords

If the output endface of an EF mode controller cable becomes damaged, it is no longer compliant to EF requirements. Due to the fragile nature of these endfaces and the cost of EF Mode Controllers, it is important to protect the output endface from damage.


Encircled Flux extender cords are low-loss reference grade patch cables that provide two economical advantages:

1) EF extender cords act as sacrificial cords that protect the fragile output endface of the more expensive mode controller cable from damage

*i.e. replacing extender cords costs less than replacing EF mode controllers*

2) adapt the EF Mode Controller output to different connector types

*i.e. one mode controller and several extender cords are less expensive than multiple mode controllers*

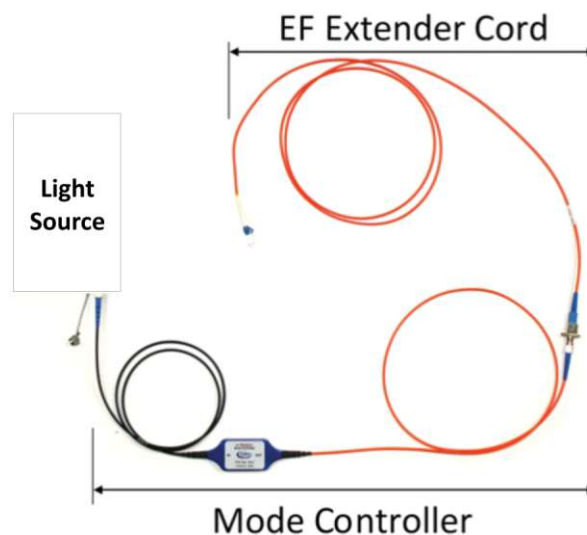

| Pricing                                                 |                                        |                                        |        |
|---------------------------------------------------------|----------------------------------------|----------------------------------------|--------|
| Core Size Options                                       | Connector Option 1 (C1)*<br>(choose 1) | Connector Option 2 (C2)*<br>(choose 1) | Price  |
| M5 = 50/125<br>M6 = 62.5/125                            | SC LC ST                               | SC LC ST                               | 325.00 |
| Part #: EFXC-core size-C1-C2<br>(example: EF-M5-SC-LC ) |                                        |                                        |        |

\* Note: when used with EF Mode Controllers, one of the connector options must match the output port of the EF cable, and the other must match the link under test.

## OTDR Launch Cables

## SINGLEMODE / MULTIMODE

### Fiber Rings and Dead Zone Boxes

OTDR launch cables, such as fiber rings and dead zone boxes, are vital to the success of OTDR measurements and address two key issues:

**REFLECTIONS.** Reflections caused by connector interfaces “blind” OTDRs for a short period of time. The period of time it takes for an OTDR to recover from this “blindness” is commonly referred to as a “dead-zone”. Within this dead-zone period, OTDRs are unable to distinguish one anomaly (e.g. breaks, shatters, bends, or even another connector) from another. Without a sufficiently long launch cable, the reflection from the near-end patch panel will be undetectable because it is within the dead-zone caused by the OTDR port.

**LOSS MEASUREMENT THROUGH INTER-CONNECTIONS.** To measure the optical loss of any event found on an OTDR trace, there must be sufficient measurable backscatter both before and after the inter-connection. Lack of a launch means there is no measurable backscatter outside the fiber link under test, preventing the OTDR from measuring the relative loss through both near-end and far-end patch panel connections.


### WHAT IS THE DIFFERENCE BETWEEN FIBER RINGS AND DEAD ZONE BOXES?

**FIBER RINGS.** Fiber rings are long cables with connectors on the ends, allowing the OTDR to sufficiently address the two key issues above. Fiber rings are thus the **BEST CHOICE** for superior OTDR test results.



Various fiber rings will be necessary when the technician works with different patch panel connections (e.g SC, LC, ST, etc.).

**DEAD ZONE BOXES.** Dead zone boxes, on the other hand, have adapters installed on the ends of a long spool, and short patch cables are required to make the final connection to the OTDR and the link under test.



Only one dead zone box (per fiber type) is required, since patch cables convert the dead zone box adapters to whatever link connector is required.

However, dead zone boxes are inferior to fiber rings because the adapter at the end of the dead zone box prevents the OTDR from sufficiently addressing the two issues listed above.

### Fiber Ring Pricing

| Part # | Length | Fiber | Connector (OTDR) | Connector (link) | Price |
|--------|--------|-------|------------------|------------------|-------|
|--------|--------|-------|------------------|------------------|-------|

#### Singlemode


|                |      |            |        |        |        |
|----------------|------|------------|--------|--------|--------|
| FR-SM-500-LCLC | 500m | Singlemode | LC/UPC | LC/UPC | 320.00 |
| FR-SM-500-LCSC | 500m | Singlemode | LC/UPC | SC/UPC | 320.00 |

#### 50/125 Multimode

|                |      |                  |        |        |        |
|----------------|------|------------------|--------|--------|--------|
| FR-M5-150-LCLC | 150m | 50/125 multimode | LC/UPC | LC/UPC | 255.00 |
| FR-M5-150-LCSC | 150m | 50/125 multimode | LC/UPC | SC/UPC | 255.00 |

#### 62.5/125 Multimode

|                |      |                    |        |        |        |
|----------------|------|--------------------|--------|--------|--------|
| FR-M6-150-LCLC | 150m | 62.5/125 multimode | LC/UPC | LC/UPC | 255.00 |
| FR-M6-150-LCSC | 150m | 62.5/125 multimode | LC/UPC | SC/UPC | 255.00 |

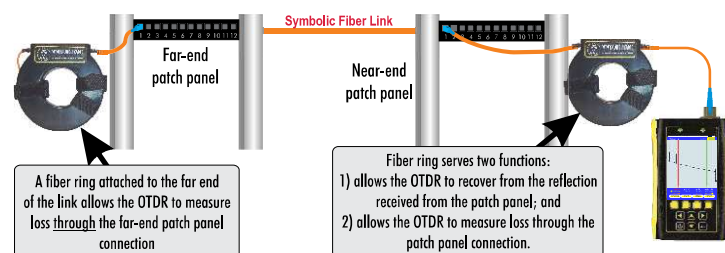

### Dead Zone Box Pricing

| Model #:    | Length | Fiber              | Connectors | Price  |
|-------------|--------|--------------------|------------|--------|
| DZB-SM-1100 | 1100m  | 9/125 singlemode   | SC/UPC     | 415.00 |
| DZB-M5-450  | 450m   | 50/125 multimode   | SC/UPC     | 370.00 |
| DZB-M6-450  | 450m   | 62.5/125 multimode | SC/UPC     | 370.00 |



Factory located in the  
Heartland of America

## OWL Optical Power Meter Detector Caps

**SINGLEMODE / MULTIMODE**

### Universal Adapter Caps

OWL universal adapter caps fit the detector port on the current models of OWL optical power meters, including:

- ZOOM 2 Series
- WaveTester Series
- Micro OWL 2 Series
- Fiber OWL 4 Series
- Fiber OWL 7 Series
- Fiber OWL 7 BIDI Series

| Pricing |                              |       |
|---------|------------------------------|-------|
| U2.5-4  | 2.5mm universal adapter cap  | 40.00 |
| U1.25-4 | 1.25mm universal adapter cap | 40.00 |



U2.5-4



U1.25-4

The U2.5-4 connects to 2.5mm connectors such as ST, SC, and FC, and the U1.25-4 connects to LC, MU, and other 1.25mm SFF connectors.

### TECHNICAL NOTE: UNIVERSAL CONNECTOR PORTS


OWL optical power meters take advantage of a flexible universal connector port system which allows multiple fiber optic connector styles to connect to the same port. Fiber optic connector ferrules come in two common sizes: 2.5mm (for ST, SC, FC, etc.) or 1.25mm (LC, MU, and other SFF connectors). A universal adapter cap is available for each ferrule size.

What gives our universal port its flexibility is that only the ferrule is inserted into the port. Since there is no latching mechanism to speak of, most connectors can connect to this port as long as the ferrule size matches the adapter cap.

Each cap is designed so that once the ferrule is completely inserted, the cone of light from a fiber connector falls completely onto the photodetector, regardless of how the connector may turn, twist, or wiggle in the port. Because of this, you can be assured that the optical power reading will always be accurate.

By allowing connection to multiple connector types, OWL's universal port method minimizes costs and maintenance requirements.

Please call our knowledgeable technical staff at 262-473-0643 with any questions you may have about our universal ports or any of our other fiber optic test products.

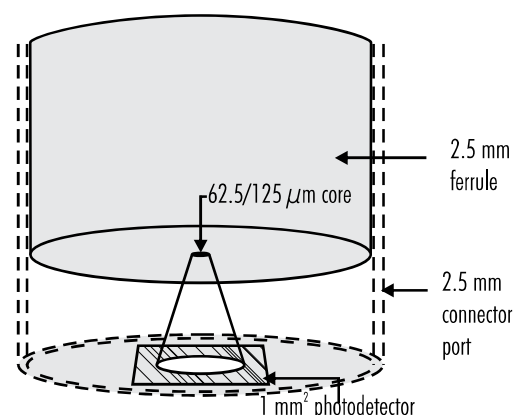

2.5mm Universal Connector Port Diagram



Factory located in the  
Heartland of America

### Fiber Optic Test Kits

### END OF LIFE NOTICE



Fiber OWL 4 Series



Micro OWL Series

#### END-OF-LIFE NOTICE

Popular Fiber OWL 4 and Micro OWL 2 series power meters and test kits have reached their end of life.

Warranty issues will be honored as normal, and OWL will continue to offer repair and calibration support for as long as possible.

These products are being replaced by various versions of the new and improved Fiber OWL 7 series power meters and test kits:

| Old Part #                 | Replaced by:                      |
|----------------------------|-----------------------------------|
| FO-4                       | F7<br>(page 22)                   |
| FO-4B                      | F7X<br>(page 20)                  |
| Kits starting with KIT-FO4 | F7X Kits<br>(page 21)             |
| MO-2                       | F7<br>(page 22)                   |
| MO-2V                      | F7V<br>(page 18)                  |
| Kits starting with KIT-M2  | F7 Kits<br>(page 23)              |
| Kits starting with IS-KIT  | New Installer Series<br>(page 16) |




Factory located in the  
Heartland of America






## IF YOU WERE A CLIENT, WHICH REPORT WOULD YOU CHOOSE?

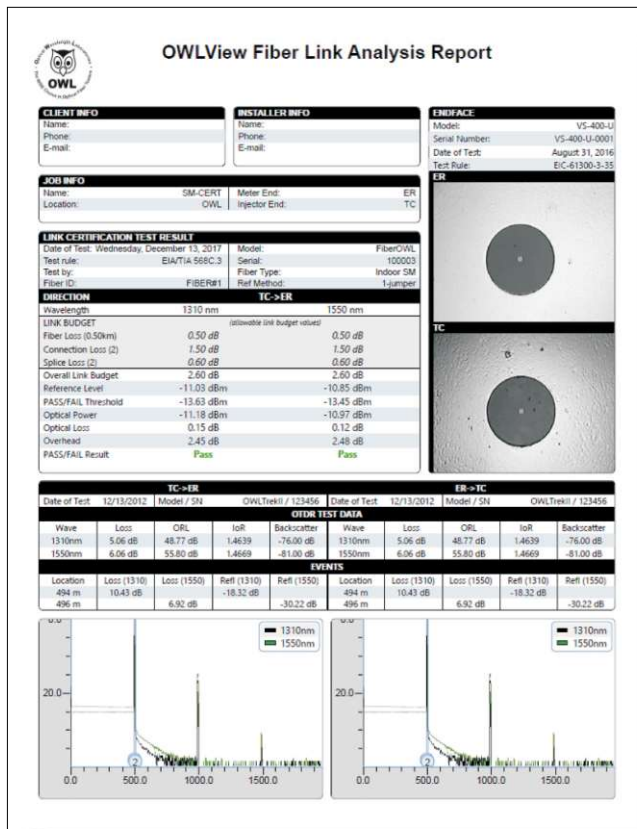

### TRI-REPORT

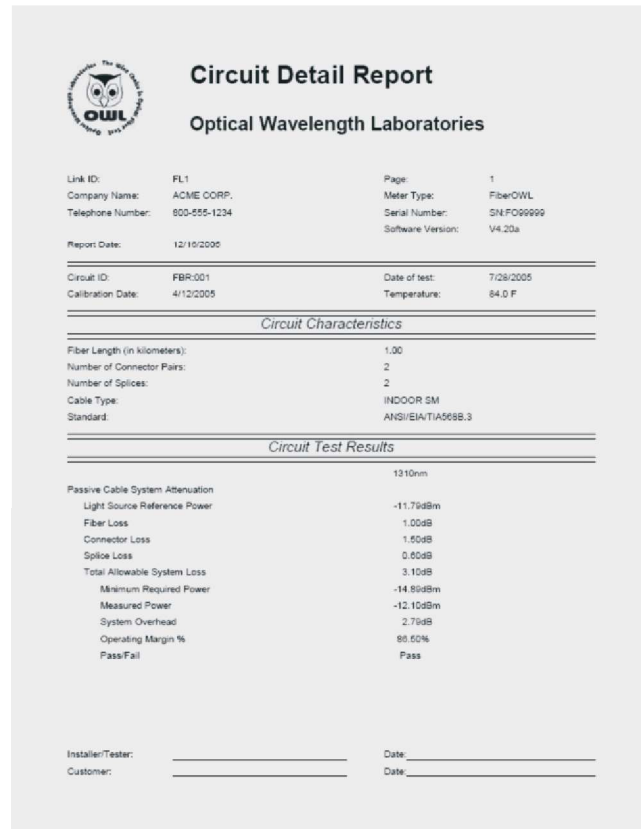

### Traditional Report

Let's say you are an installer bidding out with a major client, along with some of your competitors.

Your bid provides them with the traditional test report shown above on the right, while your competitor's bid provides the client with all three types of important test data in a single comprehensive **TRI-REPORT**, including Pass/Fail, OTDR link characterization, and endface analysis data.

## WHICH TEST REPORT DO YOU THINK THE CLIENT WILL CHOOSE?

In addition, many cabling system manufacturers prefer to receive all three types of data when granting long-term system warranties — with good reason, since these warranties are sometimes 25 years or even longer.

Thus, installers who want to stay competitive in the industry must have the ability to provide TRI-REPORTS, and equipment that helps them do so.

**WIN BIDS WHILE SAVING THOUSANDS!**

**CALL OWL TO LEARN MORE ABOUT TRI-REPORTS AND FIBER OWL 7+ CERTIFIERS!**



OWL-inc.com