



# SPECIFICATION SHEET

## 34-645



### G-TEK® NEOFOAM® SEAMLESS KNIT NYLON GLOVE WITH NEOFOAM® COATED PALM & FINGERTIPS AND MICRO DOTTED PALM – 15 GAUGE EARTH TONE

- Seamless knit nylon shell offers increased comfort, finger dexterity and breathability
- Shell is made with a double strand for a tighter, stronger work glove
- Neofoam® coated palm and fingertips offers great abrasion resistance and outstanding wet/dry grip
- Touch screen compatible to allow the user to operate a touch screen phone or device without removing gloves
- Knit wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Launderable for extended life and to reduce replacement costs
- Complies with FDA food handling requirements 21 CFR 177.2600

#### APPLICATIONS

- Large Parts Handling
- Assembly
- Manufacturing
- Material Handling
- Maintenance

#### CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)




#### TECHNICAL DATA

MATERIAL	Nylon / Neofoam® Coating				
COLOR	Shell: ■ Earth Tone / Coating: ■ Black				
CUFF STYLE	Knit wrist				
SIZES	S - XXL				
PACKAGING	1 pair per bag, 12 pair per dozen bag, 12 dozen per case				
CASE DIMENSIONS	19.7" x 11.8" x 13.8" / 50cm x 30cm x 35cm				
CASE WEIGHT	S	M	L	XL	XXL
	15.2 lbs 6.9 kg	15.4 lbs 7 kg	15.9 lbs 7.2 kg	16.3 lbs 7.4 kg	16.5 lbs 7.5 kg
COO	China				

#### DIMENSIONS (in/cm)

	S	M	L	XL	XXL
<b>A</b>	8.7 / 22	9.1 / 23	9.4 / 24	9.8 / 25	10.2 / 26
<b>B</b>	3.5 / 8.8	3.7 / 9.5	3.9 / 10	4.1 / 10.4	4.2 / 10.6
<b>H</b>	■ Red	■ Yellow	■ Brown	■ Black	■ Blue

Tolerance: ± 0.8cm (A), ± 0.5cm (B)

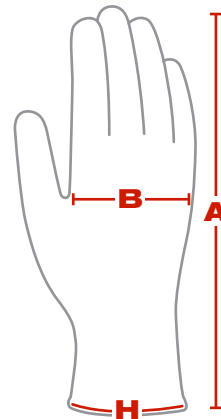

#### PERFORMANCE PROPERTIES

EN388: 4131						
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5

#### BARCODES

ITEM	PAIR	DOZEN	CASE
■ 34-645/S	616314248573	01616314248572	02616314248571
■ 34-645/M	616314248580	01616314248589	02616314248588
■ 34-645/L	616314248597	01616314248596	02616314248595
■ 34-645/XL	616314248603	01616314248602	02616314248601
■ 34-645/XXL	616314248610	01616314248619	02616314248618

#### PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.