



22mm LED Illuminated Metal Projecting Operators



Certified for
NEMA Type 4X
12 environment.

Projecting Momentary

withbulb, bulb holder
and mounting bracket

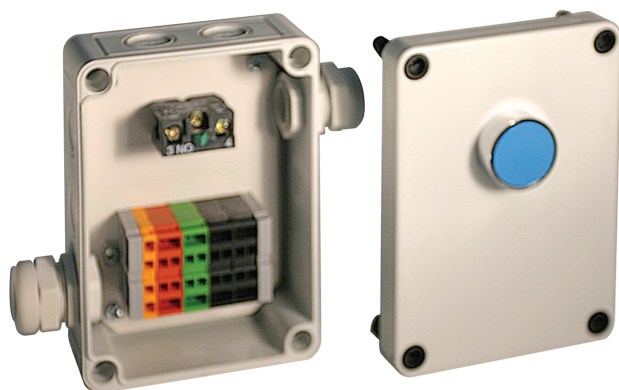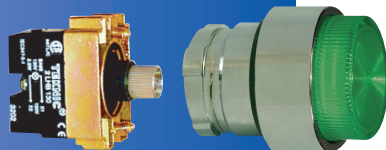

**SAMPLE
ASSEMBLY**



Replacement bulbs
available.
See page 39.

Color 12V AC/DC

	Voltage	Cat No.
☐ White	12V AC/DC	2ALP1LB-012
☒ Green	12V AC/DC	2ALP3LB-012
☒ Red	12V AC/DC	2ALP4LB-012
☒ Amber	12V AC/DC	2ALP5LB-012
☒ Blue	12V AC/DC	2ALP6LB-012
☐ Clear	12V AC/DC	2ALP7LB-012
☐ Yellow	12V AC/DC	2ALP8LB-012

24V AC/DC

☐ White	24V AC/DC	2ALP1LB-024
☒ Green	24V AC/DC	2ALP3LB-024
☒ Red	24V AC/DC	2ALP4LB-024
☒ Amber	24V AC/DC	2ALP5LB-024
☒ Blue	24V AC/DC	2ALP6LB-024
☐ Clear	24V AC/DC	2ALP7LB-024
☐ Yellow	24V AC/DC	2ALP8LB-024

48V AC/DC

☐ White	48V AC/DC	2ALP1LB-048
☒ Green	48V AC/DC	2ALP3LB-048
☒ Red	48V AC/DC	2ALP4LB-048
☒ Amber	48V AC/DC	2ALP5LB-048
☒ Blue	48V AC/DC	2ALP6LB-048
☐ Clear	48V AC/DC	2ALP7LB-048
☐ Yellow	48V AC/DC	2ALP8LB-048

110V AC

☐ White	110V AC	2ALP1LB-110
☒ Green	110V AC	2ALP3LB-110
☒ Red	110V AC	2ALP4LB-110
☒ Amber	110V AC	2ALP5LB-110
☒ Blue	110V AC	2ALP6LB-110
☐ Clear	110V AC	2ALP7LB-110
☐ Yellow	110V AC	2ALP8LB-110

110V DC

☐ White	110V DC	2ALP1LB-110D
☒ Green	110V DC	2ALP3LB-110D
☒ Red	110V DC	2ALP4LB-110D
☒ Amber	110V DC	2ALP5LB-110D
☒ Blue	110V DC	2ALP6LB-110D
☐ Clear	110V DC	2ALP7LB-110D
☐ Yellow	110V DC	2ALP8LB-110D

230V AC

☐ White	230V AC	2ALP1LB-230
☒ Green	230V AC	2ALP3LB-230
☒ Red	230V AC	2ALP4LB-230
☒ Amber	230V AC	2ALP5LB-230
☒ Blue	230V AC	2ALP6LB-230
☐ Clear	230V AC	2ALP7LB-230
☐ Yellow	230V AC	2ALP8LB-230

230V DC


☐ White	230V DC	2ALP1LB-230D
☒ Green	230V DC	2ALP3LB-230D
☒ Red	230V DC	2ALP4LB-230D
☒ Amber	230V DC	2ALP5LB-230D
☒ Blue	230V DC	2ALP6LB-230D
☐ Clear	230V DC	2ALP7LB-230D
☐ Yellow	230V DC	2ALP8LB-230D

22mm LED Illuminated Metal Projecting Operators


Dimensional Drawings

All dimensions shown in millimeters.
To convert to inches multiply by 0.03937

Projecting Momentary

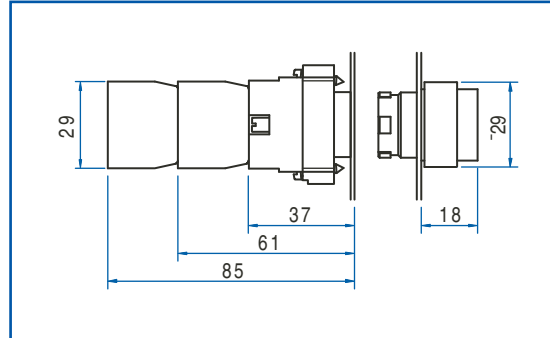

Switch Contacts (sold separately)



- Heavy-duty contact blocks with mounting screws. Blocks can be stacked 2 blocks across by 3 blocks deep for a total of 6 circuits.
- Contact blocks are available with silver contacts or gold plated contacts
- Self-wiping contacts

Panel Mount

Normally Open Silver	S1
Normally Closed Silver	S2
Normally Open Gold Plated	S3
Normally Closed Gold Plated	S4


Base Mount*

Normally Open Silver	S5
Normally Closed Silver	S6
Normally Open Gold Plated	S7
Normally Closed Gold Plated	S8

* For use with non-illuminated operators in thermoplastic or aluminum enclosures listed on pages 30 and 36-37.

Exploded Assembly View

- Up to four switch contacts can be installed with any Illuminated operator.
- Switch contacts and operators are sold separately. Preassembled push buttons are available on request.

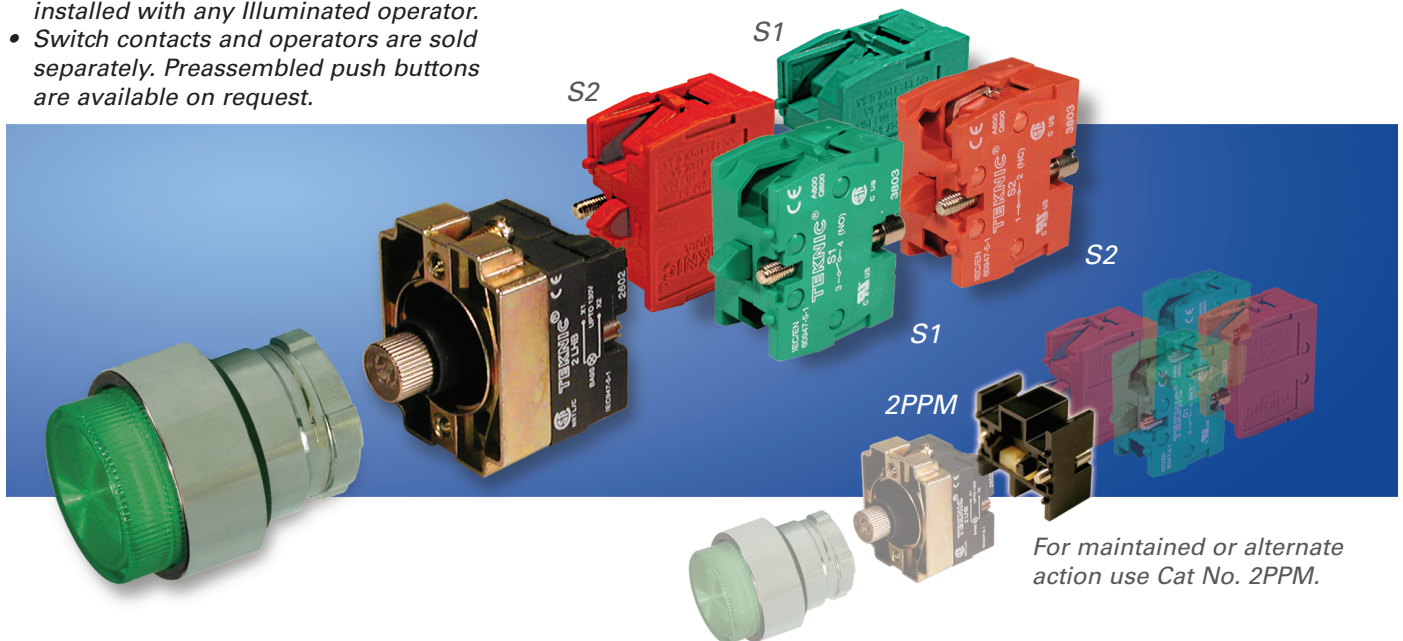

For maintained or alternate action use Cat No. 2PPM.