





Made in the
United States of America




The 1964 Series Cushioned Conductive Vinyl Floor Mat provides a static-safe flooring that does not generate static charge and when grounded will act as a path to ground for an operator wearing ESD footwear. It has a conductive pebble embossed surface and meets the required limits of ANSI/ESD S20.20 tested per ANSI/ESD S4.1 & ESD TR53. The 1964 Series matting has an anti-fatigue foam rubber base that will reduce fatigue of standing operators. The mats are non-carbon loaded, non-sloughing and permanently conductive.

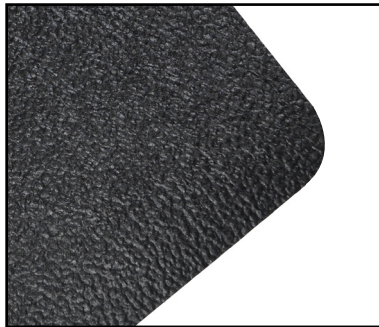

Textured Surface

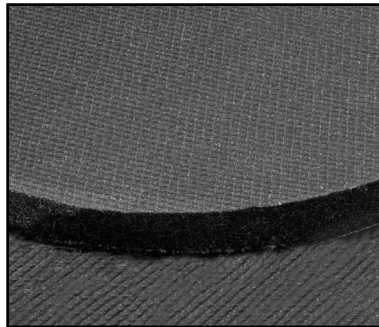

Cushioned Foam

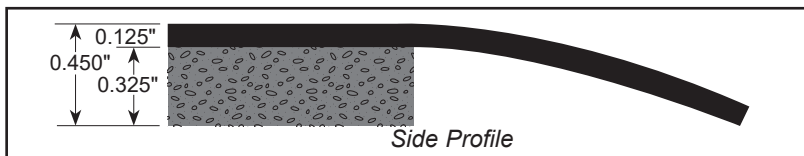

Side Profile

Properties	Typical Value
Material	Homogeneous Polymer Matrix of durable PVC
Color*	Black
Emboss Pattern	Pebble
Thickness (Top Layer)	0.125" ± 0.013" (3.2 mm ± 0.3 mm)
Bottom Foam Layer	0.325" ± 0.013" (8.3 mm ± 0.3 mm)
Tensile	600 lb/in ²
Elongation	150 %
Tear	100 lb/in
Hardness (top)	75 ± 5 Shore A
Resistance Surface to Ground (Rtg)	< 1 x 10 ⁶
Service Temperature	-20 °F to +200 °F (-6.7 °C to +93 °C)

*Color and texture may vary between lots and mills

RoHS, REACH and Conflict Minerals, Statement

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement:

[DescoIndustries.com/pdf/Regulatory.pdf](https://www.descoindustries.com/pdf/Regulatory.pdf)

See the SCS Limited Warranty

[Staticcontrol.Descoindustries.com/Limited-Warranty.aspx](https://www.staticcontrol.descoindustries.com/Limited-Warranty.aspx)

Size	Item
36" x 48" (0.91 m x 1.2 m)	770797
36" x 60" (0.91 m x 1.5 m)	770798

Unless otherwise noted, tolerance +/- 10%
Specifications and procedures subject to change without notice.

1964 SERIES CUSHIONED CONDUCTIVE VINYL FLOOR MAT



926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: [StaticControl.com](https://www.staticcontrol.com)
PHONE: EAST: (919) 718-0000 | WEST: (909) 627-9634

**DRAWING
NUMBER**
770797

DATE
May
2022