

**STINGER LED HL® OR STINGER DS LED HL®  
HIGH LUMEN RECHARGEABLE FLASHLIGHT**

**MARKET**
**APPLICATIONS:**

Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

**DESCRIPTION:**

Compact & extremely powerful, the Stinger LED HL® and Stinger DS LED HL® rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in high power LED technology. The Stinger DS LED HL® includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

**CASE MATERIAL:**

6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

**DIMENSIONS:**

Stinger LED HL® Length: 8.41 in. (21.36 cm)      Diameter: Major Diameter: 1.62 in. (4.11 cm)  
Stinger DS LED HL® Length: 8.85 in. (22.48 cm)      Body Diameter: 1.17 in. (2.97 cm)

**WEIGHT:**

Stinger LED HL®: 12.4 oz (352 grams)\*      Stinger DS LED HL®: 12.8 oz (364 grams)\*

**LENS:**


Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

**LIGHT SOURCE:**

High power LED, white, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:**

See Chart. Optimized electronics provides regulated intensity.



Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.

**ON/OFF:**

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS LED HL® provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

**RUN TIME:**


See Chart. Strobe: 3 continuous hours.

**BATTERY:**

3-cell, 3.6 Volt, 2.6Ahr Ni-MH sub-C battery, rechargeable up to 1000 times.

**CHARGE HOLDERS:**

Fits existing Stinger® chargers and new Smart chargers.

Steady charger: Fully recharges within 16 hours.

Smart charger: Fully recharges within 4.5 hours (5V/1A USB input) or 3 hours (12VDC input).

Smart PB charger: Fully recharges within 7.5 hours (5V/1A USB input) or 4 hours (12VDC input).

**CHARGE CORDS:**

Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs. 12VDC cigarette lighter or direct wire automotive cords.

**FEATURES:**


High power LED for extreme brightness.

IPX4 Rated for water resistant operation.

1 meter impact resistance tested.

Serialized for positive identification.

LED Charge-continuity indicator on charger base.

Compact, snap-in charger mounts in any position.

**WARRANTY:**

Streamlight's Limited Lifetime Warranty.





**APPROVALS:**


**CE** Meets applicable European Community Directives.

**BC** CEC Compliant (Smart charger models only)

**OPTIONAL**
**ACCESSORIES:**

Safety wands, ring holder, holster, color filters, 2.6Ahr Li-Ion battery, 5-unit bank charger, Smart charger, Steady charger or Smart Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT	 800 LUMENS	800 LUMENS	400 LUMENS	200 LUMENS
RUN TIME	 1h 30min	1h 30min	2h 30min	5h
DISTANCE	 310m	310m	219m	155m
INTENSITY	 24,000cd	24,000cd	12,000cd	6,000cd

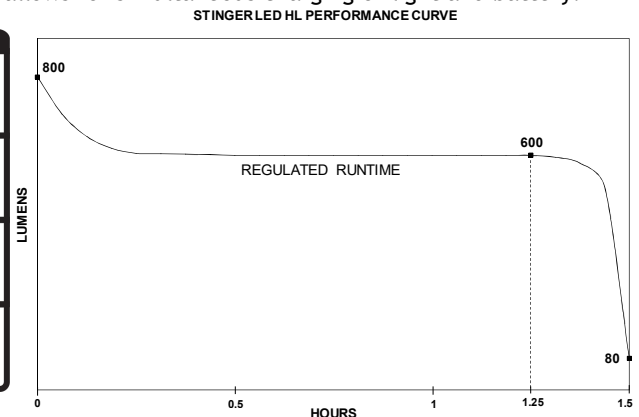

\*With battery (included in purchase)

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 12/10/2012

Revised: 05/08/2019 Rev: 2

Engineered in the USA, manufactured in China

Document #226