

## CBA400M-260

### 10 KHz to 400 MHz 260 Watt Class A Solid State Amplifier




#### MAIN FEATURES

- Class A Operation
- Ideal for BCI Testing
- Mismatch Tolerant & Unconditionally Stable
- USB Remote Control Option
- 3 Year Warranty

Designed specifically for automotive, military and aerospace BCI and other susceptibility EMC testing, this mismatch tolerant Class A amplifier delivers power continuously into the varying match typically associated with this type of testing.

The GaAs Class A push pull design ensures a high reliability, low distortion linear performance across the frequency range. This design also ensures that the amplifier will continue to operate at full power even when presented with an open or short circuit at its output.

The unit is powered from a switched mode power supply for high efficiency, high power factor and wide voltage range operation. The unit is air-cooled with integral fans, and is protected against faulty cooling by excess temperature sensing. For added flexibility, two safety interlock BNC connectors are provided on the rear panel which allows either short circuit or open circuit to mute the output from the amplifier. Front panel indicators are provided to indicate over-temperature and rf interlock operation.

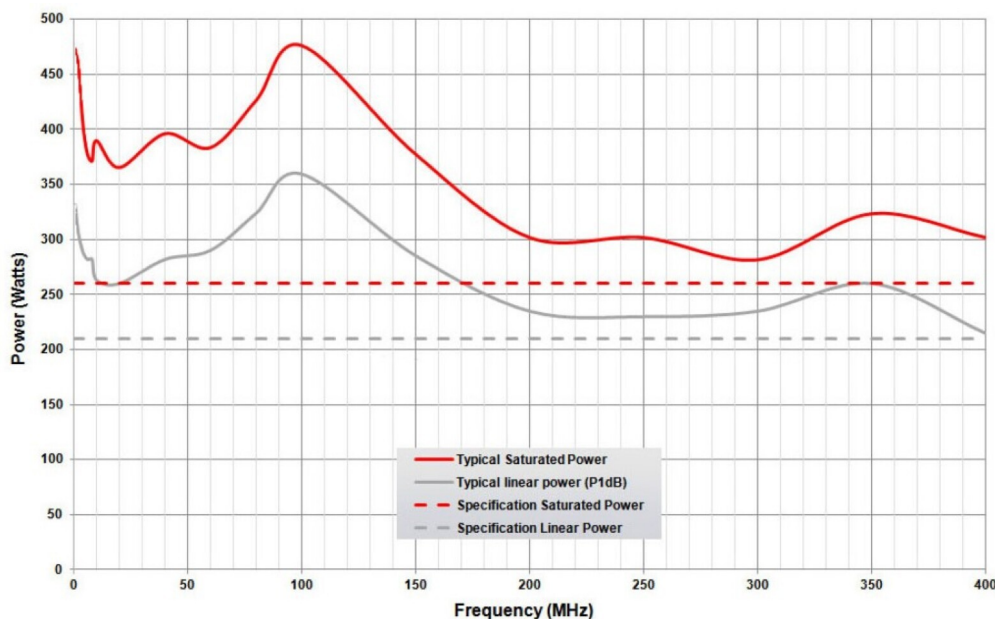

## Technical Specifications

Frequency Bands	Single Band
Frequency (min.) kHz	10 kHz
Frequency (max.) MHz	400 MHz
Psat (min)	260 W
P1dB (min.)	210 W
Small Signal Gain	54 dB
Gain Variation (max) ±	+/- 3.0 dB
Harmonics @ P1dB (typ)	-20 dBc
Spurious (min.)	-70 dBc
3rd Order Intercept Point	10 dB > P1dB
Modulation Formats	AM, FM, Pulse
Maximum Input Power (no damage)	10 dBm
Output VSWR Tolerance	Infinite any phase (no foldback)
Stability	Unconditional
Output Impedance	50 Ohm
Input VSWR	2:1 (max)
Output VSWR	2:1 (typical)

## General Specifications

Safety Interlock	Via rear panel mounted BNC-female
Supply Voltage	90 to 264 VAC
Supply Frequency	47 to 63
Supply Power (typ.)	1 kVA
RF Input Connector	Type N female
RF Output Connector	Type N female
Weight kg	20 kg
Dimensions	19 inch, 6U, 440mm (WxHxD)
Cooling System	Air Cooled, Self-contained

## Available Variants

Product	Configuration	Item #
CBA400M-260-001	Front Panel RF Connectors	3-342418
CBA400M-260-002	Rear Panel RF Connectors	3-342419