

# ENVIRONMENTAL TESTERS

## LIGHTMETER


### MODELS CA811 & CA813

Features optical sensors that are designed to match the response of the human eye

### SPECIFICATIONS

MODELS	CA811	CA813*
<b>MEASUREMENTS</b>		
Range	20fc, 200fc, 2000fc, 20kfc	20fc, 200fc, 2000fc, 20kfc
	20lux, 200lux, 2000lux, 20klux	20lux, 200lux, 2000lux, 20klux
Display Resolution	0.01fc or 0.01lux	
Sensor	Silicon photodiode	
Spectral Response	CIE Photopic Curve	
Accuracy	±5% of Reading ±10cts	±5% of Reading ±10cts
2856K Light Source	±18% of Reading ±2cts	±11% of Reading ±2cts
Common Light Source		
Sample Rate	2.5 times per second, nominal	
<b>GENERAL</b>		
Display	3½ digit liquid crystal display (LCD), 2000-count	
Operating Temperature	32° to 122°F (0° to 50°C), <80% RH	
Storage Temperature	-4° to 140°F (-20° to 60°C), 0 to 80% RH without battery	
Polarity	Automatic	
Power Source	One 9V Alkaline battery (included)	
Low Battery Indication	Displayed when battery voltage is low	
Dimensions	6.81 x 2.38 x 1.5" (173 x 60.5 x 38mm)	
Weight	Approx. 7.55oz (214g) including battery	Approx. 7.9oz (224g) including battery

Consult factory for NIST Calibration prices

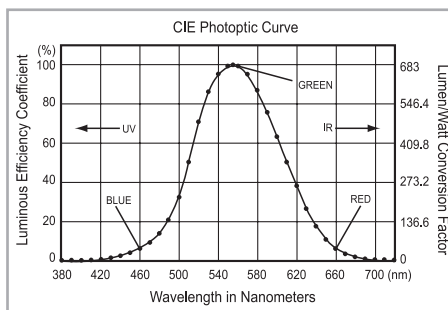

\*Note: Model CA813 offers higher sensitivity (200klux) and has a better spectral response to common light sources. Model CA811 is used to measure incandescent lighting.

### PRODUCT INCLUDES

Rugged shockproof protective holster, 9V battery and a user manual.



CA811

CA813



### FEATURES

- Easy one-hand operation
- Designed to measure a wide range of lighting types
- Removable sensor for remote reading
- Measures in footcandles (fc) or lux
- Measures incandescent lighting
- Cosine corrected
- Hold function
- Max function (CA811)
- Peak function (CA813)
- CIE photopic (human eye) response
- 2000-count backlit LCD
- Lightweight and compact
- Removable protective sensor cover
- Includes rugged, shockproof, protective and dirt resistant gray cover

### APPLICATIONS

- Testing for OSHA compliance in workplace, cleanroom and industrial settings
- Ambient testing for light-sensitive displays and archives in museums and art galleries

CATALOG NO.	DESCRIPTION
2121.20	Lightmeter Model CA811
2121.21	Lightmeter Model CA813

