
Direct Handle Accessories and Mounting Alternatives

DIRECT HANDLES

Improved design with metal shaft. Use for all your "inside the panel" applications. 1 suitcase lock location.



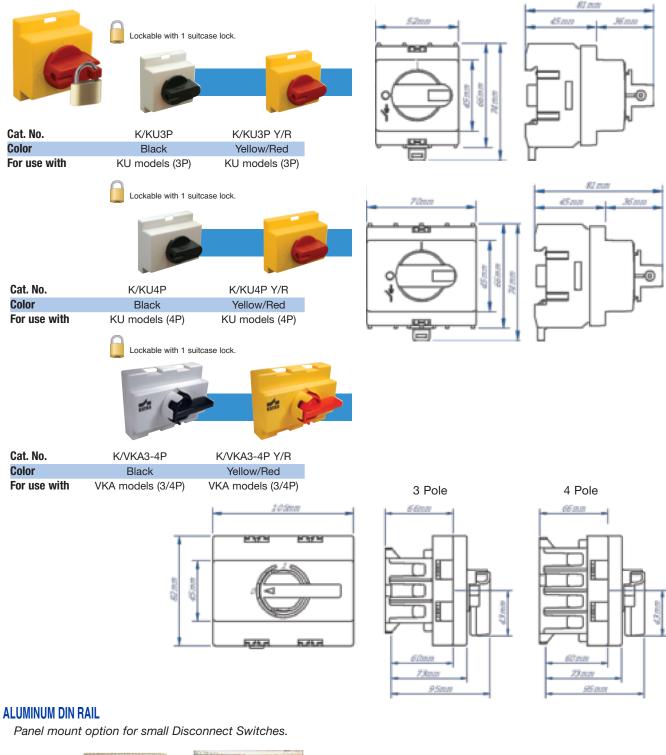

NOTE:

In the rare case that your mounting hardware (screws) for DIN Rail interfere with the enforcement studs in the back of the Motor Disconnect Switch please use smaller (<M3 or equivalent) flathead screws or change your DIN Rail to the 15mm high version.

Dimensions (to convert to inches multiply by 0.03937)