

# PLUGGABLE PANEL MOUNT STANDOFF FEET - 600V

## HE42SST

## HE42SBU



### Dimensions & Weight

|                            |        |        |
|----------------------------|--------|--------|
| Pitch Spacing              | 10 mm  | 10 mm  |
| Weight per piece (12 pole) | 30.6 g | 30.4 g |

### Technical Data/Ratings

|                              |                                                                                                                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Approvals                    |   |  |  |  |  |
| Wire Size (solid / stranded) | 24-10 AWG                                                                                                                                                           | 2.5-4 mm <sup>2</sup>                                                             | 24-10 AWG                                                                         | 2.5-4 mm <sup>2</sup>                                                             | 2.5-4 mm <sup>2</sup>                                                               |
| Voltage Rating               | 600 V                                                                                                                                                               | 500 V                                                                             | 600 V                                                                             | 600 V                                                                             | 500 V                                                                               |
| Current Rating               | 20 A                                                                                                                                                                | 10 A                                                                              | 20 A                                                                              | 20 A                                                                              | 10 A                                                                                |
| Torque                       | 7.0 lb-in                                                                                                                                                           | 0.4 Nm                                                                            | 7.0 lb-in                                                                         | 7.0 lb-in                                                                         | 0.4 Nm                                                                              |
| Insulation Material          | Polyamide 66/6 V0                                                                                                                                                   |                                                                                   | Polyamide 66/6 V0                                                                 |                                                                                   |                                                                                     |
| Insert Material              | Tinned Brass                                                                                                                                                        |                                                                                   | Tinned Brass                                                                      |                                                                                   |                                                                                     |
| Terminal Screw Material      | Blue Chromated Steel                                                                                                                                                |                                                                                   | Blue Chromated Steel                                                              |                                                                                   |                                                                                     |

### Installation Instructions

|                        |        |        |
|------------------------|--------|--------|
| Wire Stripping Length  | 7 mm   | 6 mm   |
| Mounting Hole Diameter | 3.0 mm | 3.6 mm |
| Terminal Screw Size    | M3.5   | M4     |


### Terminal Strips

|         | Cat. No.   | Length   | Std. Pk. | Cat. No.   | Length   | Std. Pk. |
|---------|------------|----------|----------|------------|----------|----------|
| 2 pole  | HE42SST/02 | 16.4 mm  | 100      | HE42SBU/02 | 16.4 mm  | 100      |
| 3 pole  | HE42SST/03 | 26.4 mm  | 100      | HE42SBU/03 | 26.4 mm  | 100      |
| 4 pole  | HE42SST/04 | 36.4 mm  | 100      | HE42SBU/04 | 36.4 mm  | 100      |
| 5 pole  | HE42SST/05 | 46.4 mm  | 100      | HE42SBU/05 | 46.4 mm  | 100      |
| 6 pole  | HE42SST/06 | 56.4 mm  | 50       | HE42SBU/06 | 56.4 mm  | 50       |
| 7 pole  | HE42SST/07 | 66.4 mm  | 50       | HE42SBU/07 | 66.4 mm  | 50       |
| 8 pole  | HE42SST/08 | 76.4 mm  | 50       | HE42SBU/08 | 76.4 mm  | 50       |
| 9 pole  | HE42SST/09 | 86.4 mm  | 50       | HE42SBU/09 | 86.4 mm  | 50       |
| 10 pole | HE42SST/10 | 96.4 mm  | 50       | HE42SBU/10 | 96.4 mm  | 50       |
| 11 pole | HE42SST/11 | 106.4 mm | 50       | HE42SBU/11 | 106.4 mm | 50       |
| 12 pole | HE42SST/12 | 116.4 mm | 50       | HE42SBU/12 | 116.4 mm | 50       |


### Accessories

|                  | Cat. No.    | Std. Pk. | Cat. No.    | Std. Pk. |
|------------------|-------------|----------|-------------|----------|
| External Jumpers |             |          |             |          |
| 2 pole           | HCL10-2     | 100      | HCL10-2     | 100      |
| 3 pole           | HCL10-3     | 100      | HCL10-3     | 100      |
| 4 pole           | HCL10-4     | 100      | HCL10-4     | 100      |
| 12 pole          | HCL10-12    | 25       | HCL10-12    | 25       |
| Marking Plates   |             |          |             |          |
| Blank            | BS24E       | 25       | BS24E       | 25       |
| No. 1-12         | BS24EM1-12  | 25       | BS24EM1-12  | 25       |
| No. 13-24        | BS24EM13-24 | 25       | BS24EM13-24 | 25       |

### HE42SST DIMENSIONS

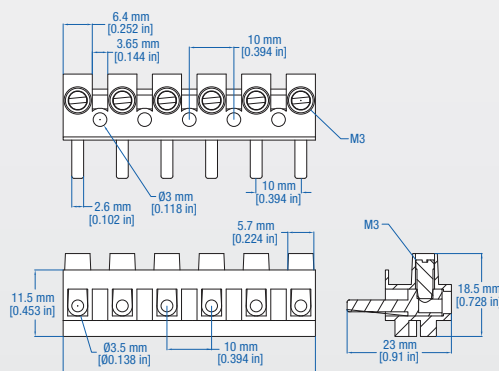

### HE42SBU DIMENSIONS

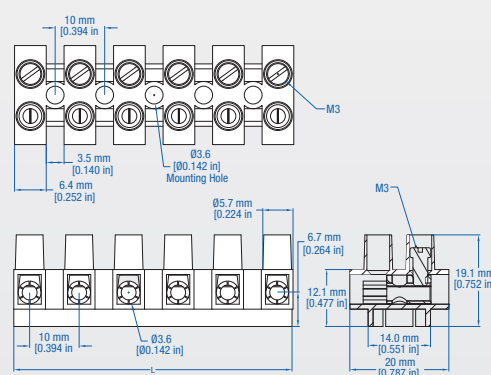

(All dimensions are shown in mm, to convert to inches please divide by 25.4)