

48 Terminal Fixed Terminals



TECHNICAL INFORMATION

Electrical: 10A, 300V, 22-14AWG	*Color: Black Housing Gray Cover Plate
Materials: Housing - PA-GF Front Plate - PBT Terminals - PA	Terminal Type: Fixed Screw
Temperature Range: Up to 120°C (248°F)	Terminal Screw Size: M2.5
Flammability Rating: UL94 V-O	Recommended Torque: 0.5Nm
	Max. PCB's: (2) Vertical
	Mounting: 35mm DIN Rail


ORDERING INFORMATION

Part Number	Type	Terminals	PCB Connection
90.160	KS4404/F	Fixed Screw	Machine Solder


ACCESSORIES

Accessories	Part Number	Type
1 Meter DIN Rail	2511120/1M	TS35x7.5/1M
Terminal Blanking Plug	90.190	KS4403-5-1
Light Pipes, 3mm Grid	90.191	KS4400-7-1
Light Pipes, 5mm Grid	90.192	KS4400-6-1

ENCLOSURE DRAWING (To convert to inches divide by 25.4.)

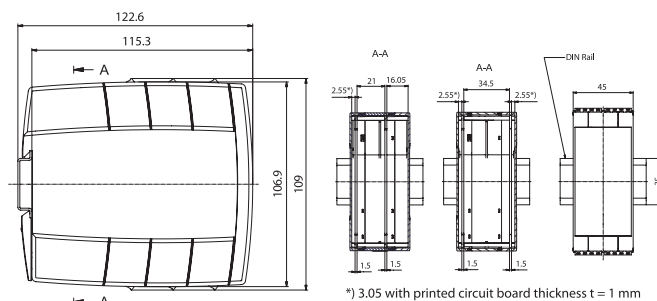

PCB DRAWING (To convert to inches divide by 25.4.)

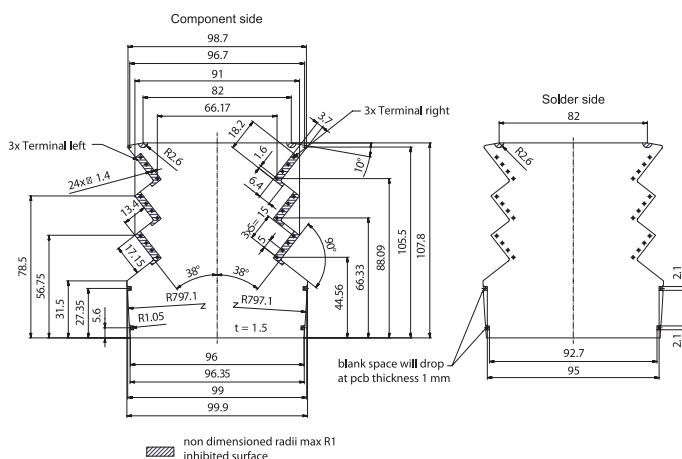

*Other colors are available upon request.

48 Terminal Pluggable Terminals



TECHNICAL INFORMATION

Electrical: 10A, 300V, 30-12AWG (Screw); 10A, 300V, 26-12AWG (Spring)	*Color: Black Housing Gray Cover Plate
Materials: Housing - PA-GF Front Plate - PBT Terminals - PA	Terminal Type: Pluggable Screw / Pluggable Spring
Temperature Range: Up to 120°C (248°F)	Terminal Screw Size: M2.5
Flammability Rating: UL94 V-O	Recommended Torque: 0.5Nm
	Max. PCB's: (2) Vertical
	Mounting: 35mm DIN Rail


ORDERING INFORMATION

Part Number	Type	Terminals	PCB Connection
90.161	KS4404/PS	Pluggable Screw	Machine Solder
90.162	KS4404/PC	Pluggable Spring	Machine Solder

ACCESSORIES

Accessories	Part Number	Type
1 Meter DIN Rail	2511120/1M	TS35x7.5/1M
Terminal Blanking Plug	90.190	KS4403-5-1
Light Pipes, 3mm Grid	90.191	KS4400-7-1
Light Pipes, 5mm Grid	90.192	KS4400-6-1

ENCLOSURE DRAWING (To convert to inches divide by 25.4.)

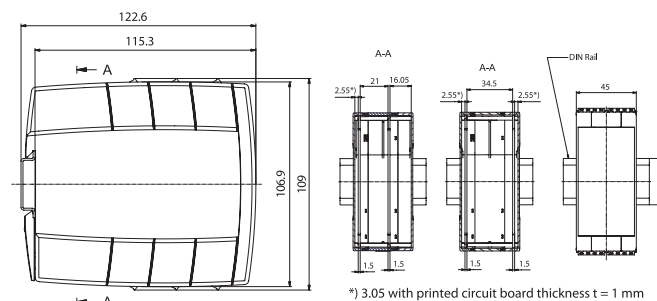

PCB DRAWING (To convert to inches divide by 25.4.)

