


Toggle Handle Motor Disconnect Switch

The KUE series only requires an additional cover plate (see below) which makes the switch IP20 touch proof.



 Lockable with 1 padlock.



Catalog Number	KUE316
No. of Poles	3
General Purpose Current	16 A
Maximum Voltage	600V AC
Motor FLA @ 480V AC	14 A
Motor FLA @ 600V	9A

Horsepower Rating	1 Phase	3 Phase
110-120V AC	1	2
200V AC	1.5	3
208V AC	1.5	3
220-240V AC	2	3
265V AC	–	5
277V AC	–	5
380-415V AC	–	7.5
440-480V AC	–	10
550-600V AC	–	7.5

Short Circuit Withstand Rating at 600 V with Fuse Size/Class:	10 kA
K5	30 A
RK5	30 A
RK1	60 A
J	80 A

Terminal Size Acceptability	14-8 AWG
(Cu Conductors only, 75°C)	
Terminal Torque	16 lb. in. (1.8 Nm)
Screw Head Type	No. 2 Pozidrive


Dimensions
(to convert to inches multiply by 0.03937)

KUE325	KUE340	KUE363	KUE380
3	3	3	3
25 A	40 A	60 A	80 A
600V AC	600V AC	600V AC	600V AC
21 A	27 A	34 A	40 A
11A	17 A	27 A	32 A

1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
1.5	3	2	3	3	5	5	7.5
2	5	3	7.5	5	10	7.5	10
2	5	3	7.5	5	10	7.5	10
3	5	5	7.5	7.5	10	10	15
–	7.5	–	10	–	10	–	15
–	7.5	–	10	–	10	–	15
–	10	–	15	–	20	–	25
–	15	–	20	–	25	–	30
–	10	–	15	–	25	–	30

10 kA	10 kA	10 kA	10 kA
30 A	30 A	30 A	30 A
30 A	30 A	30 A	30 A
60 A	60 A	60 A	60 A
80 A	80 A	100 A	100 A

14-8 AWG	14-8 AWG	12-4 AWG	12-4 AWG
16 lb. in. (1.8 Nm)	16 lb. in. (1.8 Nm)	16 lb. in. (1.8 Nm)	16 lb. in. (1.8 Nm)
No. 2 Pozidrive	No. 2 Pozidrive	No. 2 Pozidrive	No. 2 Pozidrive

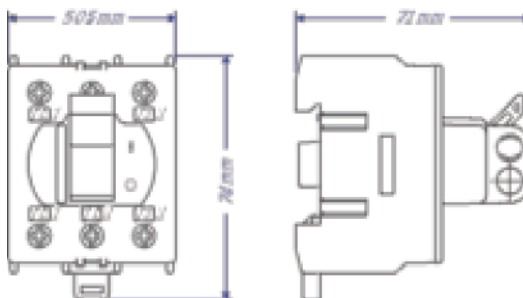

Weight	0.172 kg (0.379 lb.) (3 pole)	0.172 kg (0.379 lb.) (3 pole)	0.200 kg (0.441 lb.) (3 pole)	0.200 kg (0.441 lb.) (3 pole)
--------	-------------------------------	-------------------------------	-------------------------------	-------------------------------

Suitable Accessories
Cover Plate



Cat. No.	K/KUE	K/KUE Y	R/KUE	R/KUE Y
Color	Grey	Yellow	Grey	Yellow
Shape	Rectangular	Rectangular	Circular	Circular