


**Plastic bodied limit switch**

Series IN65

Description **IN65-E2 RK**Article number **6083000219**

Electrical Data					
Rated insulation voltage	$U_i$	400 V AC			
Rated impulse withstand voltage	$U_{imp}$	4 kV			
Rated operational voltage	$U_e$	240 V			
Rated supply frequency AC		50 / 60 Hz			
Overvoltage category		II acc. EN 60947-1 annex H table H1			
Conv. thermal current	$I_{the}$	5 A			
Minimum current		1 mA			
Utilization category		AC 15, $U_e/I_e$ 240 V / 3 A DC 13, $U_e/I_e$ 24 V / 4 A			
Short-circuit protective device		Fuse 4 A gG			
Rated conditional short-circuit current		400 A			
Max. contact resistance		25 mOhm (unused)			

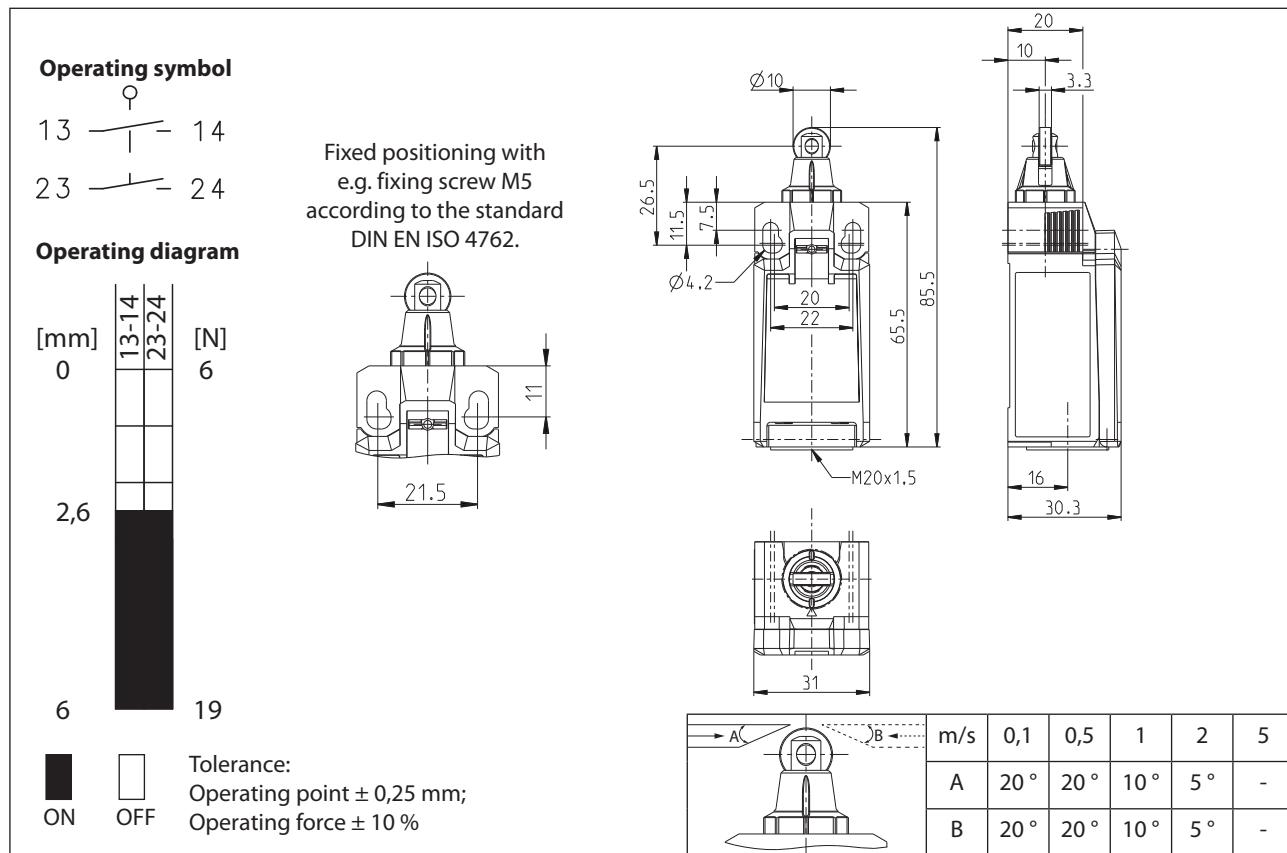

<b>Mechanical data</b>		
Enclosure		Thermoplastic, glass fibre reinforced (UL 94-V0)
Cover		Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuator		Roller (Thermoplastic)
Actuating force	$F_B$	$10 \text{ N} \leq F_B \leq 30 \text{ N}$
Operating temperature		-30 °C ... +75 °C
Storage temperature		-40 °C ... +80 °C
Protection type		IP66 / IP67 acc. EN 60529
Pollution degree (built-in switch)		3
Contact material		silver
Device Class (built-in switch)		Category E (MC3+CC2+SC1) acc. EN 60947-1 annex Q
Contact type		2 N.O. (Form Zb)
Operating rate	$V$	$0,06 \text{ m/min} \leq V \leq 30 \text{ m/min}$
Bounce duration	ms	The value depends on the operating rate.
Switchover time	ms	The value depends on the operating rate.
Switching frequency		$\leq 60 / \text{min.}$
Mechanical life		$20 \times 10^6$ operating cycles
Mission time		$\leq 20 \text{ years}$
Connection		4 screw connections (M3)
Conductor cross-sections		Solid or Litz wire with ferrules 0,34 mm <sup>2</sup> - 1,5 mm <sup>2</sup> ; AWG 22-16
Cable entrance		1 x M20 x1,5
Weight		$\approx 0,08 \text{ kg}$
Installation position		operator definable

<b>Actuation</b>
The actuating device is preferably started from 2 sides.
By lifting the clamp the actuation assembly can be rotated in 45° increments such that 8 actuation directions are possible.
The actuation assembly is to be again fastened to the housing by lowering the clamp.

<b>Standards</b>
VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
UL 508 / CSA C22.2 No.14

<b>EU Conformity</b>
acc. to directive 2014/35/EU (Low-Voltage-Directive)

<b>Approvals</b>
CCC (AC 15, U <sub>e</sub> /I <sub>e</sub> 240 V / 1,5 A; DC 13, U <sub>e</sub> /I <sub>e</sub> 24 V / 1,5 A)
CSA <sub>US</sub> B300, 240Vac 1.5A G.P., 24Vdc 1.5A R. Enclosure Type 4X

<b>Notes</b>
The degree of protection (IP code) specified applies solely to a properly closed cover and the use of an equivalent cable gland with adequate cable.