
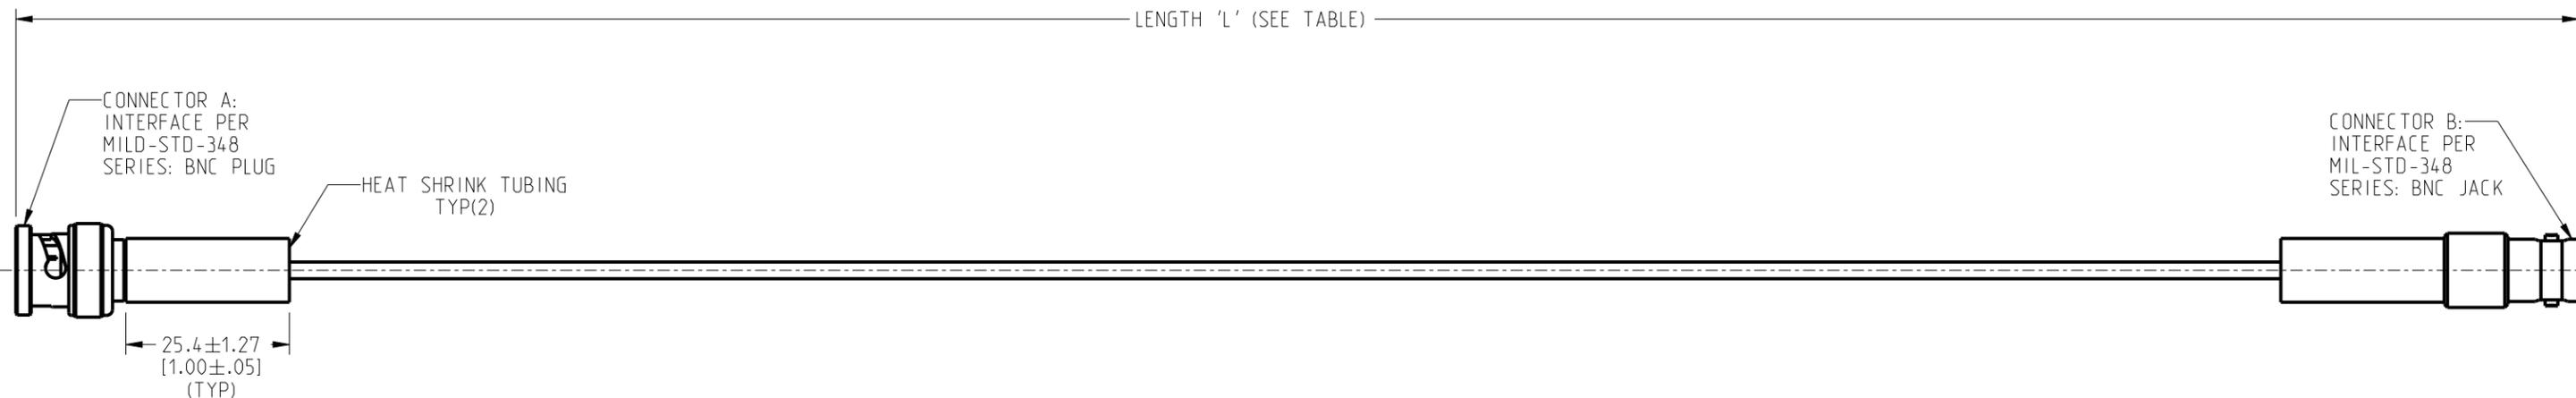


NOTES:

- MATERIALS AND FINISHES:  
 CONNECTOR A: 112132- STR BNC CRIMP PLUG  
 CONNECTOR B: 112160- STR BNC CRIMP JACK  
 CABLE: RG-316
- ELECTRICAL:  
 A. IMPEDANCE: 50 OHM
- MECHANICAL:  
 A. TEMPERATURE RANGE: -55° C TO 165° C
- PACKAGING:  
 A. QUANTITY: SINGLE PACK  
 B. MARKING: BAG TO BE MARKED  
 "AMPHENOL, 95-850-267-XXX, AND DATE CODE"

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
A	RELEASE TO MFG.	2/1/2021	15521	DG

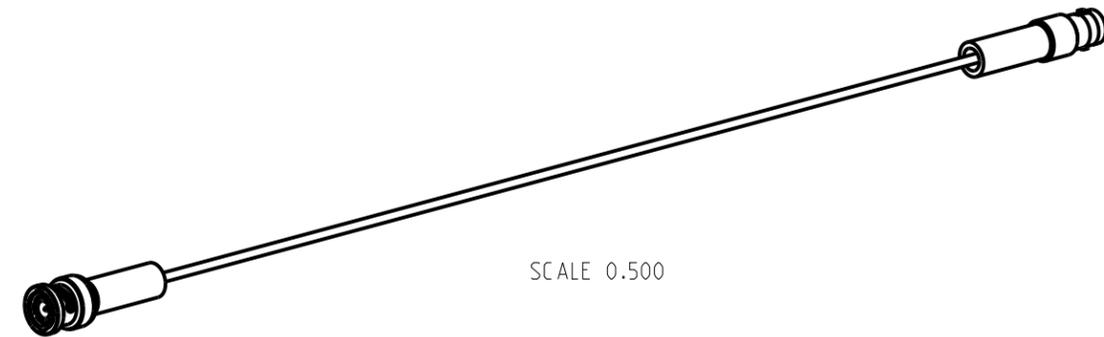

LENGTH TABLE		
PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]
95-850-267-006	-	6.000 [0.152]
-	95-850-267M025	9.843 [0.250]
95-850-267-012	-	12.000 [0.305]
95-850-267-016	-	16.000 [0.406]
95-850-267-018	-	18.000 [0.457]
-	95-850-267M050	19.685 [0.500]
95-850-267-024	-	24.000 [0.609]
-	95-850-267M075	29.528 [0.750]
95-850-267-036	-	36.000 [0.914]
-	95-850-267M100	39.970 [1.000]
95-850-267-048	-	48.000 [1.219]

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0-0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 14.99]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

DESIGN REQUIREMENTS

- FREQUENCY: DC TO 4.0 GHz     CONTINUITY  
 VSWR: ---- :1 MAX     HI-POT: 1500 VRMS  
 INS. LOSS: ---- dB MAX     OTHER

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:  
 <0.5mm = ±0.05mm    [<0.020 = ±0.002]  
 >0.5 - 6mm = ±0.1mm    [>0.020 - 0.236 = ±0.004]  
 >6.00 - 30mm = ±0.2mm    [>0.236 - 1.181 = ±0.008]  
 >30.00 - 120mm = ±0.3mm    [>1.181 - 4.725 = ±0.012]

MATERIAL  
 TITLE  
 BNC STR PLUG TO  
 BNC STR JACK  
 RG-316, VARIOUS LENGTHS

ENGINEER  
 D.GEORGE  
 DATE  
 1/31/2021  
 SHEET NO. 2 OF 2  
 SCALE: 1.0:1.0

**Amphenol RF**  
 SIZE  
 B  
 DRAWING NO. 95-850-267-XXX  
 ITEM NO. 95-850-267-XXX  
 PART NO. 95-850-267-XXX  
 REV  
 A

THIRD ANGLE PROJ.    REFERENCE  
 ---  
 EAR#  
 10443

ANGLES = ±1°

SCALE: 1.0:1.0

SCALE: 1.0:1.0

SCALE: 1.0:1.0