NOTE:

1. ELECTRIC PERFORMANCE

IMPEDANCE (Ω) : 50 FREQUENCY RANGE

: DC-6GHz : ≤ 1.065 (DC-3GHz) VSW R : ≤1.2 (3-6GHz)

INSERT LOSS (dB) : ≤ 0.1

: ≤-160 (2X43dBm) PIM(dBc) INSULATION RESISTANCE (M Ω): 5000

PROOF VOLTAGE (V) :2500 CONDUCTOR RESISTANCE (m Ω): OUTER CONDUCTOR <0.2 INNER CONDUCTOR <0.8

II. MECHANICAL PERFORMANCE MECHANICAL WEAR : 500


III. MATERIAL AND PLATING OUTER CONDUCTOR : BRASS PLATING COPPER-TIN-ZINC≥2μm INNER CONDUCTOR : SPRING COPPER PLATING Ag≥5μm INSULATOR : PTFE

IV. ENVIRONMENT


TEMP RANGE : -55 °C TO +155 °C W ATERPROOF STANDARD : IP67

ROHS COMPLIANT



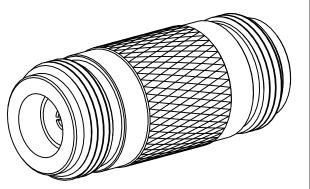

SCALE 2.000

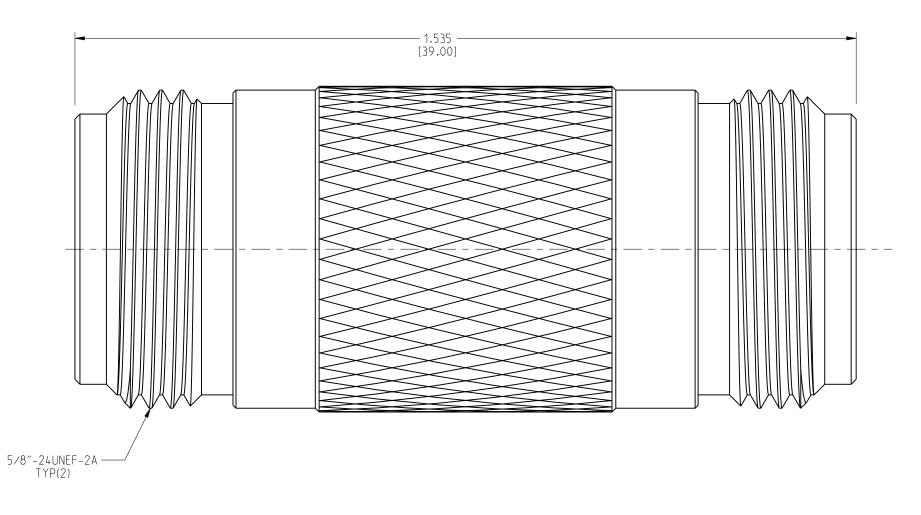

3	INSULATOR	PTFE	NATURAL	1
2	INNER CONDUCTOR	SPRING COPPER	SILVER	1
1	OUTER CONDUCTOR	BRASS	WHITE BRONZE	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS 2 PLACE DECIMAL 3 PLACE DEC ±.015 (0,381 mm) ±.005 (0,1	
NOTICE - These drawings, specifications, or of property of Amphenol Corp. (2) must be returned confidential and not to be disclosed to any peare given by Amphenol Corp. The furnishing of other data by Amphenol Corp., or to any other not to be regarded by implication or otherwise rights or permitting such holder or any other product, process or design, patented or otherword disclosed by said drawings, specifications,	d upon request; and (3) are rson other than those to whom they these drawings, specifications, or person to anyone for any purpose is in any manner licensing, granting person to manufacture, use or sell any rise, that may in any way be related to

SEE	NOTES
REFERENCE	

MATERIAL

DRAWN	DATE
GOPI M	01-0ct-12
ENGINEER	DATE
GOPI M	01-0ct-12
APPROVED	DATE
CAD FILE	

TITLE		
N FEMALE		
ADAPTER,	LUW	PIM

Amp	h	е	n	\Diamond	
Co					

SCALE: 5.3:1	SHEET	I OF I
--------------	-------	--------

REV

А

	DWG	SIZE	DRAWING	NO.	
		R		172) (