
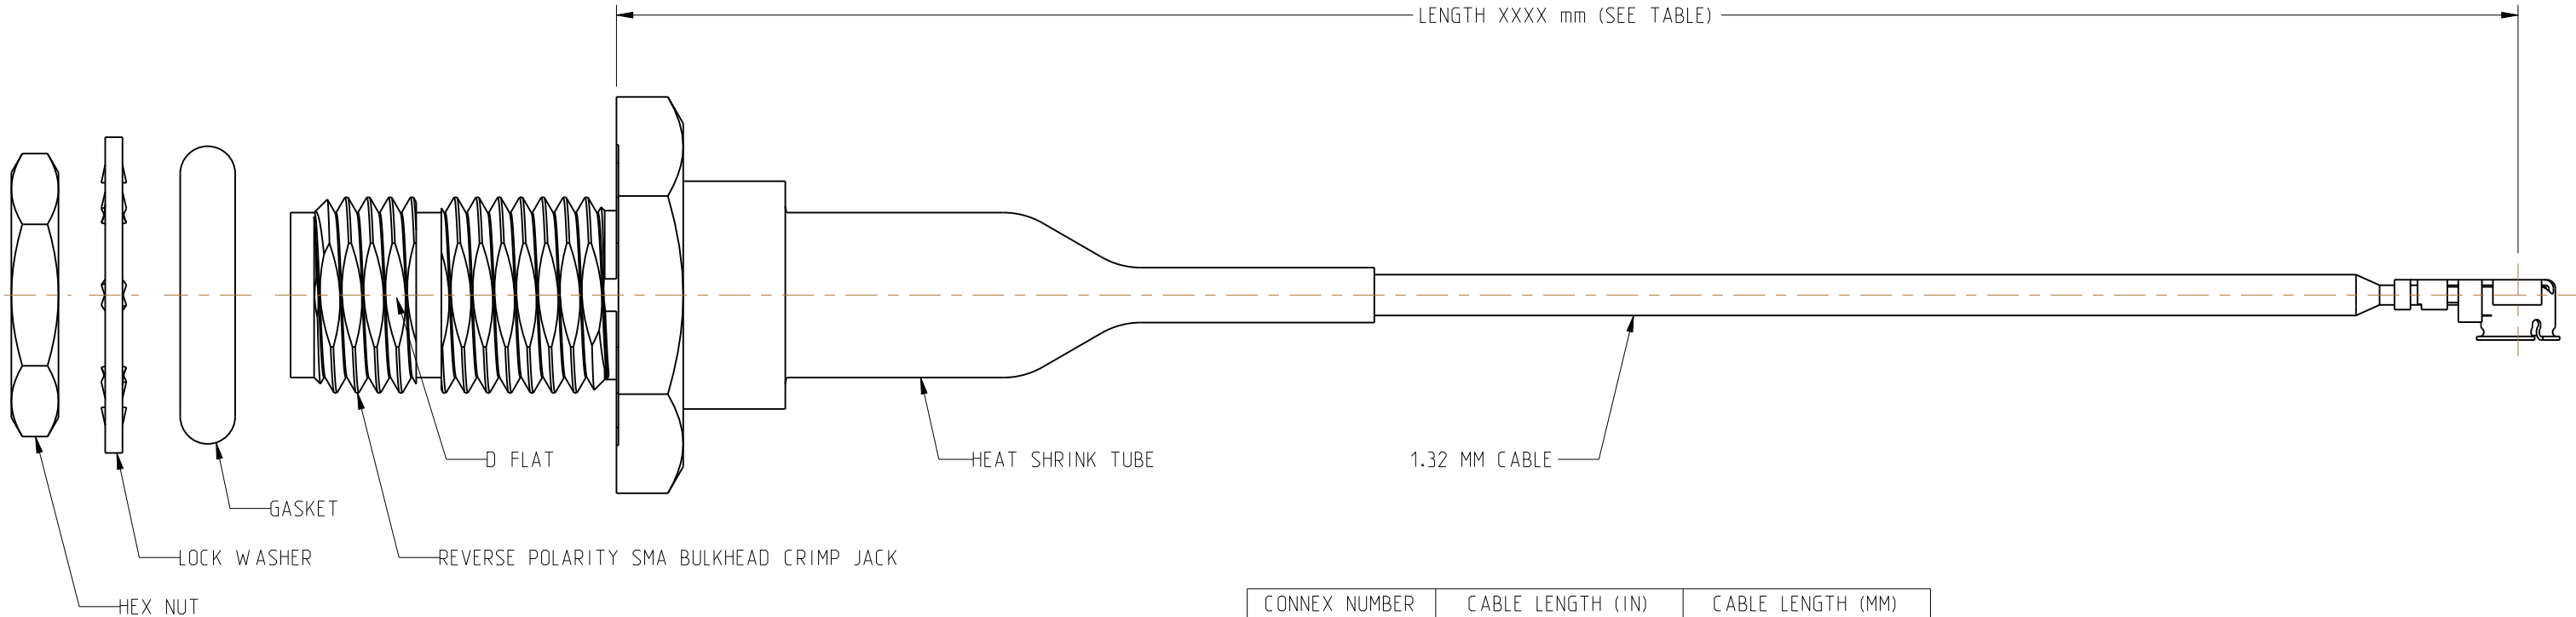


NOTES: 1. MATERIALS AND FINISHES: REVERSE POLARITY SMA BULKHEAD CRIMP JACK - P/N: 132389RP MICRO COAX RIGHT ANGLE PLUG USING 1.32MM CABLE - P/N: A-1PA-132-XXXB2 2. ELECTRICAL: A. IMPEDANCE: 50 OHM, NOMINAL 3. PACKAGING: A. QUANTITY: SINGLE PACK B. BAG TO BE MARKED: AMPHENOL RF, 336306-13-XXXX, AND DATE CODE	336306-13-XXXX		REVISIONS			
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
	THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	13-Jun-11	--	RAK
		B	A-1PA-132-630B2 WAS 100910-01	09-Jul-14	2754	KR/BG



CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
336306-13-0050	1.968 ±0.150	50 ±3.81
336306-13-0100	3.936 ±0.150	100 ±3.81
336306-13-0150	5.905 ±0.150	150 ±3.81
336306-13-0200	7.873 ±0.200	200 ±5.08
336306-13-0250	9.842 ±0.200	250 ±5.08
336306-13-0300	11.810 ±0.200	300 ±5.08

* ADDITIONAL LENGTHS CAN BE PROVIDED.
CONTACT AMPHENOL RF MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- ☒ FREQUENCY: DC TO 6 GHz
- ☐ VSWR _____ : 1 MAX
- ☐ INS. LOSS _____ dB MAX
- ☒ CONTINUITY
- ☒ HI-POT :200 VRMS
- ☐ OTHER

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL SEE NOTES	DRAWN KARTHIK R	DATE 06-Jun-14	TITLE REVERSE POLARITY SMA BULKHEAD CRIMP JACK TO AMC RIGHT ANGLE PLUG TERMINATED, USING 1.32MM CABLE. VARIOUS LENGTHS	Amphenol Connex	
		ENGINEER ABHAYA KISHORE	DATE 13-Jun-11			
	REFERENCE TASK - 682	APPROVED B.C. GLEISSNER	DATE 09-Jul-14		SCALE: 4.8:1 SHEET 2 OF 2	
		CAD FILE		DWG SIZE B	DRAWING NO. 336306-13-XXXX	REV B