


NOTES:


1. MATERIALS AND FINISHES:  
 BODIES, COUPLING NUT & CAP- STAINLESS STEEL, PASSIVATED  
 CONTACT - BeCu, GOLD PLATING  
 INSULATOR - PTFE, NATURAL  
 FERRULE - COPPER, NICKEL PLATING  
 GASKET - SILICONE RUBBER, RED  
 RETAINING RING - BeCu, NATURAL  
 HEAT SHRINK TUBE - POLYOLEFIN, BLACK
2. ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. FREQUENCY: DC - 12.4 GHz
3. MECHANICAL:  
 A. DURABILITY: 500 CYCLES MIN.  
 B. TEMPERATURE RANGE: -65°C TO 165°C

4. PACKAGING:  
 A. QUANTITY: SINGLE PACK  
 B. MARKING: PACKING TO BE MARKED  
 "AMPHENOL RF, 901-9531-2SF AND DATE CODE"
  5. CABLE ASSEMBLY INSTRUCTIONS:  
 A. FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS SEE  
 AMPHENOL SPEC 349-50180, SHEET 12.  
 B. CRIMP FERRULE WITH AMPHENOL TOOL 227-944, & DIE SET  
 227-1221-11, CAVITY 'A' (M22520/5-11 CLOSURE 'A') (0.213" HEX).
- 6 SHOWS CABLE ENTRY DIMENSIONS.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
--	RELEASE TO MFG.	--	--	--
H	REDRAWN IN CREO & COD SHEET ADDED	09-SEP-20	15318	MR

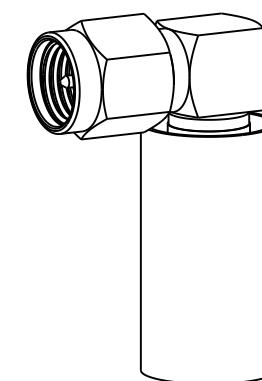

SCALE 1.750

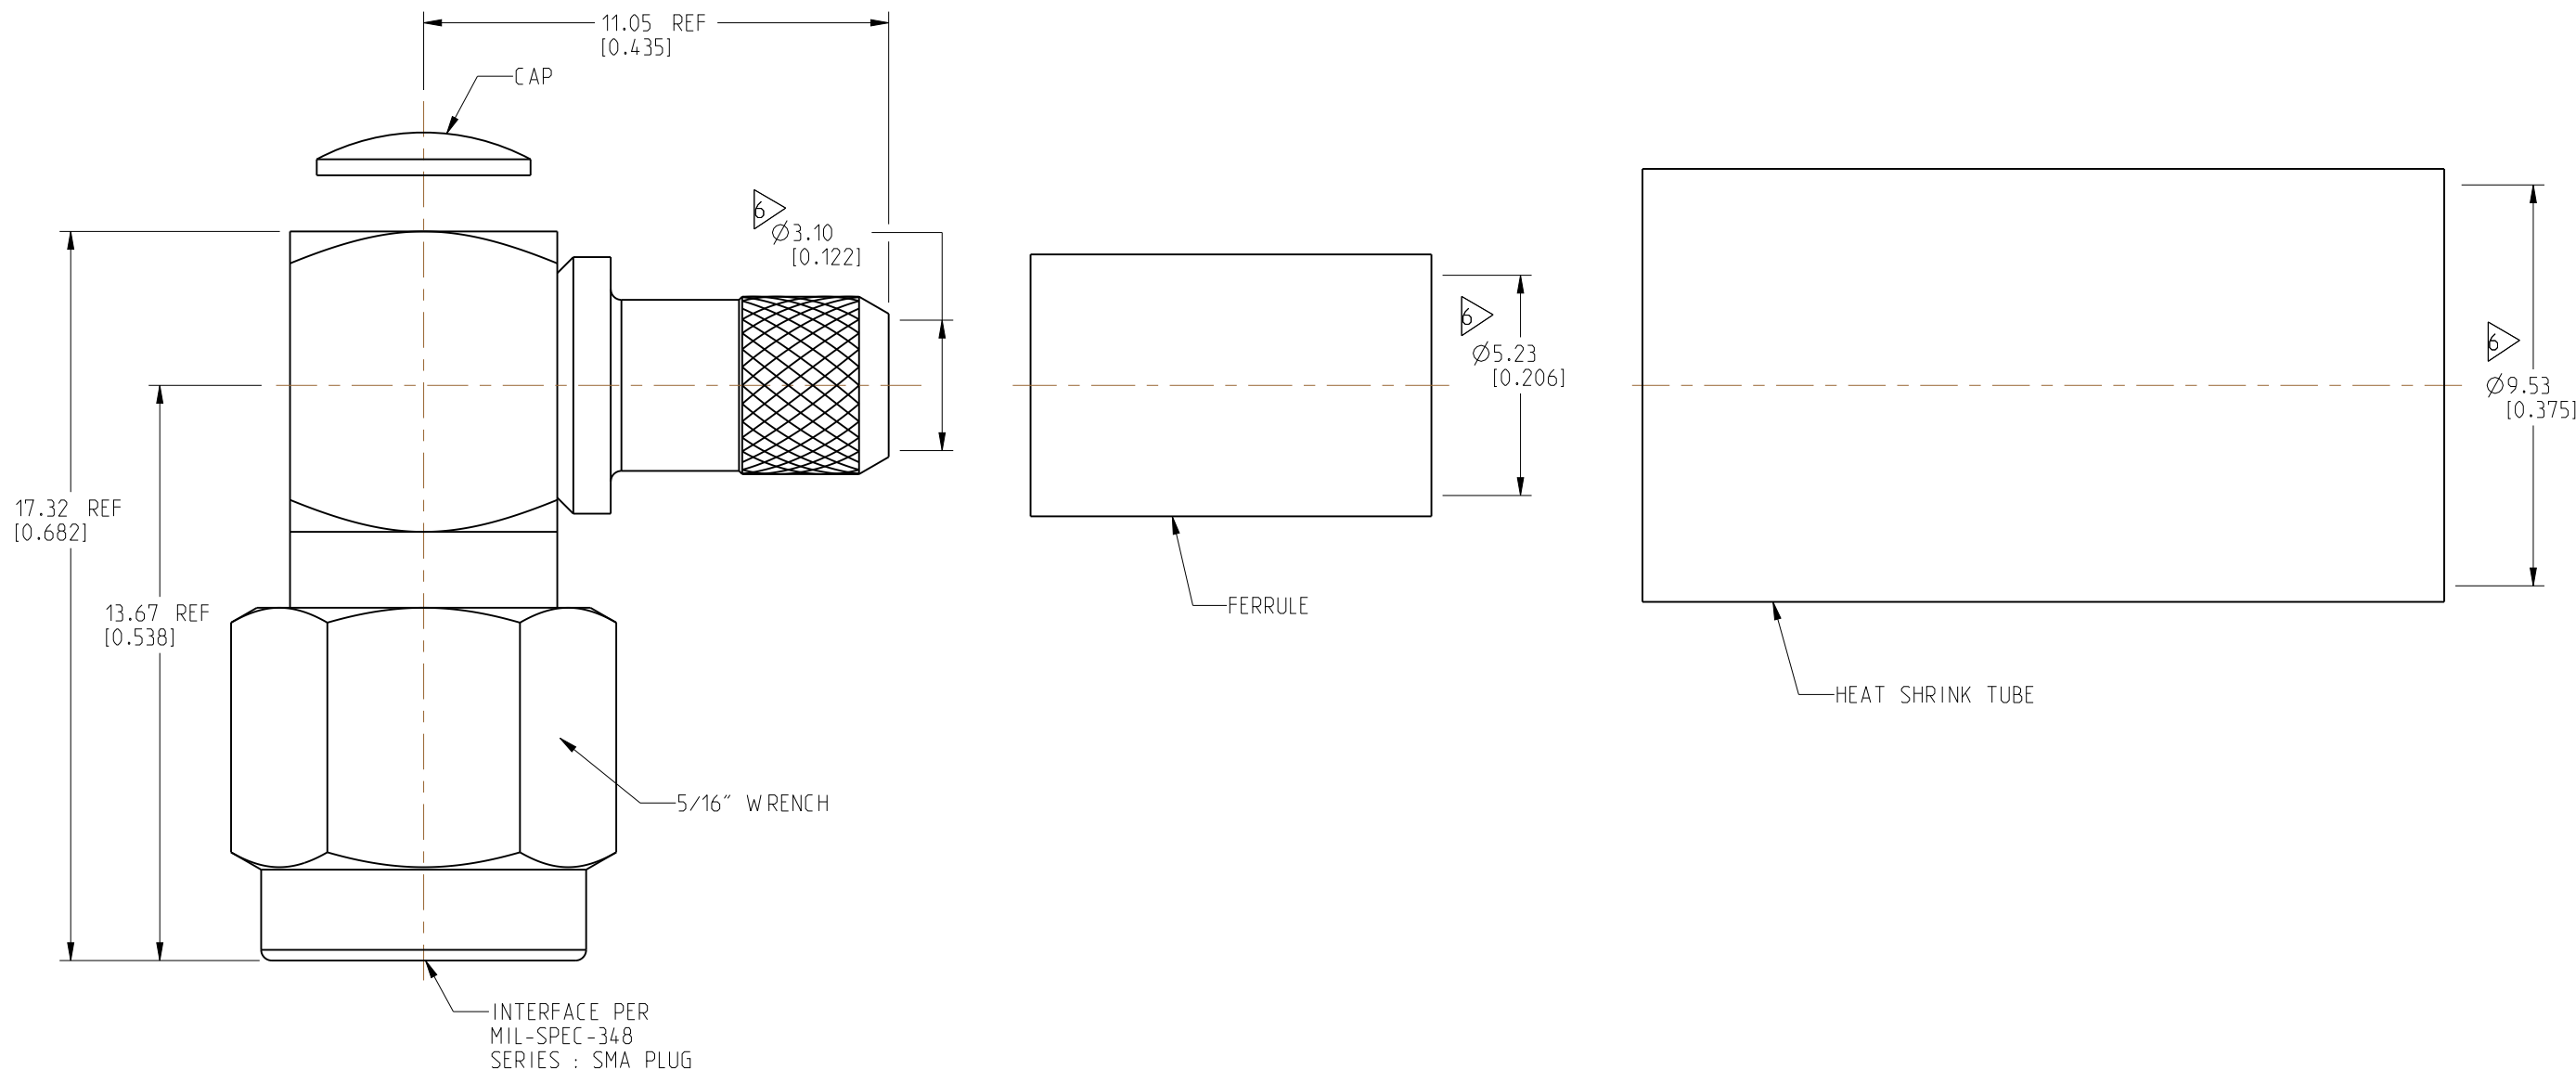

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: $<0.5\text{mm} = \pm 0.05\text{mm}$ [ $<0.020 = \pm 0.002$ ] $>0.5 - 6\text{mm} = \pm 0.1\text{mm}$ [ $>0.020 - 0.236 = \pm 0.004$ ] $>6.00 - 30\text{mm} = \pm 0.2\text{mm}$ [ $>0.236 - 1.181 = \pm 0.008$ ] $>30.00 - 120\text{mm} = \pm 0.3\text{mm}$ [ $>1.181 - 4.725 = \pm 0.012$ ] ANGLES = $\pm 1^\circ$		MATERIAL SEE NOTES		TITLE SMA RA PLUG FOR RG-58,141 BELDEN YR 20621 CABLE		<b>Amphenol RF</b>	
THIRD ANGLE PROJ.  REFERENCE		EAR# 963088-0		ENGINEER O.BARTHELMES		DATE 21-MAY-20		SHEET NO. 2 OF 2 SCALE: 6.0:1.0	
SIZE B		DRAWING NO. 901-9531-2SF		ITEM NO. 901-9531-2SF		PART NO. 901-9531-2SF		REV H	