
## Ø22/25 Double Push Button Switches (S2TR Series)

Typo	Appearance	Model	Contact block		LED block				
Туре		Woder	A contact	B contact	AC/DC voltage	AC voltage			
Extended		S2TR-P1W2A(M)	2	_	_	_			
		S2TR-P1W2B(M)	_	2	_	_			
		S2TR-P1WAB(M)	1	1	_	_			
		*The M in the model name indicates modular type contact block. Models without M are singular contact block. *The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact and LED block: regular letters)							
		• Dimensions							
		(unit: mm) - <del>▶   ∢</del> Panel thickness: Max. 6mm							
	S2TR-P3W□	30.4	11.9	A B B 4 7 8 8 8 8 9 8 9 8 9 8 9 9 9 9 9 9 9 9 9	Singular ty				
		WFor panel cut-out dimensions, please refer to page A-82.							
Туре	Appearance	Model	Contact block		LED block				
Extended (illuminated)		COTE POMOAD(AA)	A contact	B contact	AC/DC voltage	AC voltage			
					1				
		. ,	2	_	_	1			
		<b>S2TR-P3W</b> 2AL(M) <b>S2TR-P3W</b> 2BD(M)	2	_ _ 2	1	1			

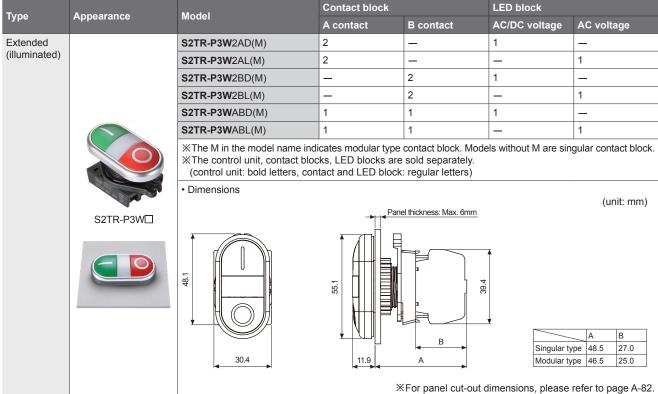

A-74 Autonics

## **Ø22/25 Panel Cut-out Dimensions**

(unit: mm)

Туре		A	В	Panel Cut-out Dimensions		
Round/Square Push Button Switches (S2PR/S2PRS Series)			33	55		
Round Selector Switches	Short lever	dame	33	55	<mounting hole:="" ø25=""></mounting>	
(S2SR/S2SRN Series)	Long lever	dame	55	55		
Round Key Selector Switches (S2KR Series)		33	55	Min. A <sup>±0.5</sup> Ø25.5		
Double Push Button Switches (S2TR Series)			33		60	
Mushroom-head Push Button Switches (S2BR Series)			33	55	<mounting hole:="" ø22=""> R1 3 Ø22.5</mounting>	
	D30		33	55	20	
Emergency Switches (S2ER Series)	D40		55	55	·	
	D60		80	80		
Pilot Lights (L2RR Series)			33	55		

A-82 Autonics