

CT2965

Rigid Alligator Clip

6" Rigid Alligator Clip with 4 mm Banana Jack Interconnect...


Description

6" Rigid Alligator Clip with 4 mm Banana Jack Interconnect.

Ideal for high current application, alligator style contact can grasp terminals to 12.7 mm (0.50") in diameter. Rigid housing allow increased current capacity. Insulation on alligator contacts protects against shorting.

- Materials: Body: Polyamide (Nylon); Contact tip: Brass, Nickel Plt.

Datasheet

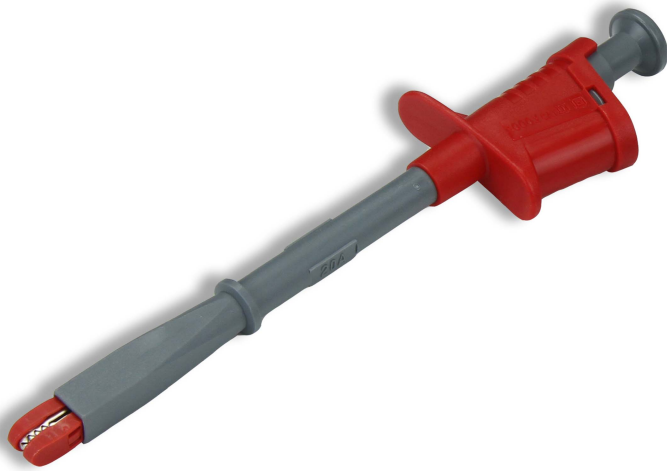

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com

Cal Test
ELECTRONICS 

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25°C ± 5°C.

Specifications

IEC Rating	1,000 V CAT III
Current Max	20A
Resistance Max	50 mohm
Temperature (degrees)	-20 to +80 degC
RoHS (2011/65/EU)	Compliant

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com

