

CT2400

Flexible Alligator Clip


Datasheet

6" Flexible Alligator Clip with 4 mm Banana Jack interconnect...

Description

6" Flexible Alligator Clip can grasp terminals to 12.7 mm (0.50") in diameter. 4 mm Banana Jack interconnection, Insulation on alligator contact protects against shorting.

- Materials: Body: Polyamide (Nylon) and Santoprene; Contact: Brass, Nickel Plt.

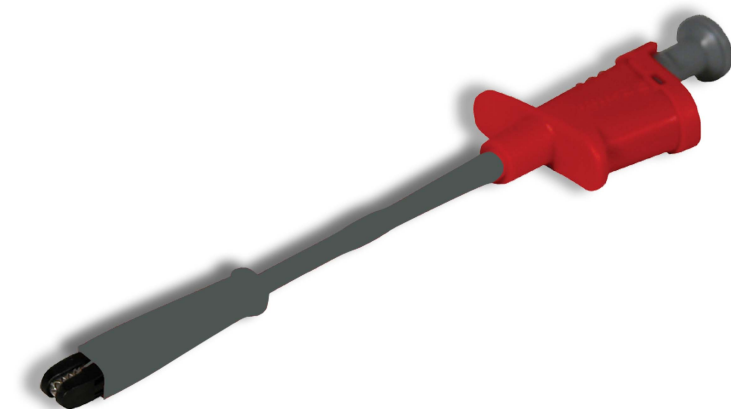

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com



All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25°C ± 5°C.

Specifications

| | |
|------------------------------|-----------------|
| IEC Rating | 1,000 V CAT III |
| Current Max | 6 A |
| Resistance Max | 50 mohm |
| Temperature (degrees) | -20 to +80 degC |
| RoHS (2011/65/EU) | Compliant |

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com