THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS. INC.

1. STANDARD PROBE BODY WITH 2 mm PIN TIP.

2. SPECIFICATIONS:

INSULATOR: POLYAMIDE (NYLON).

PROBE TIP & BANANA PLÙG JACK: BRASS, NICKEL PLATED

RATING:


VOLTAGE: 1,000 V CAT II P2 (IEC 61010-031)


CURRENT: 36 A MAX.

TEMPERATURE:  $-20^{\circ}$  TO  $+80^{\circ}$ C.

CE DECLARATION OF CONFORMITY

CONFORMS TO ROHS 2, ANNEX III 6(c) EXEMPTION.



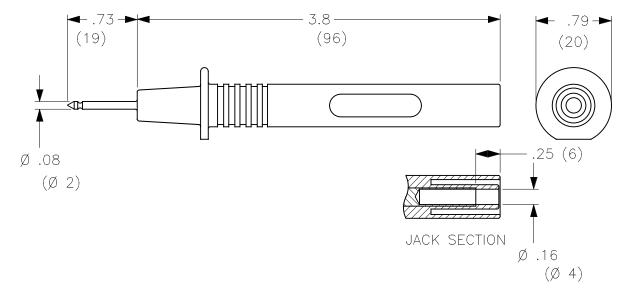

## CT2266-# – COLOR: O – BLACK

THIRD ANGLE PROJECTION

USED ON

PART NUMBERS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS FRACTIONS ± 1/32  $.XX \pm .02$ .XXX ±.005 DO NOT SCALE DRAWING

MATERIAL

**2** - RED

**APPROVALS** DATE DRAWN 7/12/99 WDH CHECKED ENGR.

CONTRACT NO.

Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610

NEXT ASSY	
APPLICATION	

DESIGN ACTIVITY

SIZE CAGE CODE 43F45

1:1

TITLE

SCALE

DWG. NO. P226600

STANDARD PROBE BODY w/2 mm

PIN TIP

REV. Α

1 OF 1

SHEET