



THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/12/99	
A	Updated to METRIC format; Added Notes 4 & 5.	6/4/18	


- BNC FEMALE WITH 4 mm BANANA PLUGS
APPLICATION: ADAPTS BNC MALE CONNECTOR TO 4 mm BANANA PLUGS TO CONNECT TO DUAL BANANA JACKS.
- SPECIFICATIONS:
INSULATOR: POLYAMIDE (NYLON), BLACK
BANANA PLUG CONTACTS: PHOS. BRONZE, NICKEL PLATED
BNC(f): BRASS. CENTER CONTACT, GOLD PLATED.
- RATING:
VOLTAGE: 500 V
CURRENT: 3 A MAX.
RESISTANCE: <0.8 mΩ.
TEMPERATURE: -20° C TO +80° C.
- STANDARD PACKAGING: 5 PCS PER PACK.
- RoHS 2 COMPLIANT.

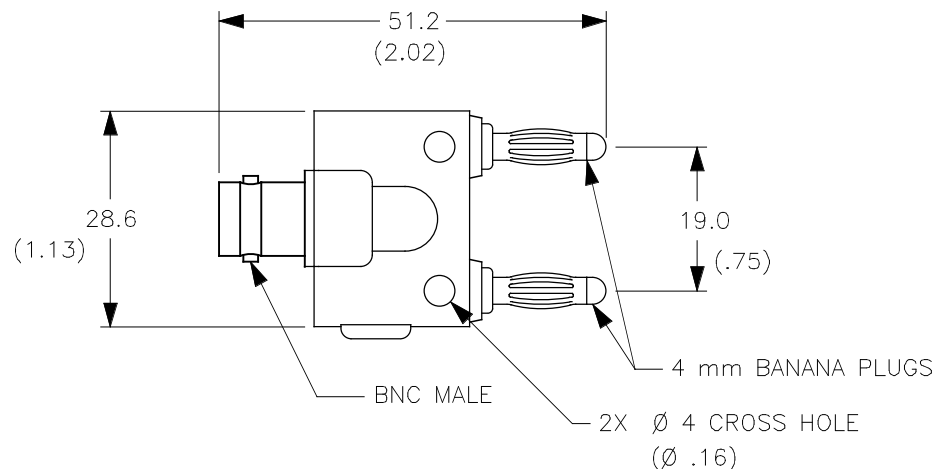

PART NUMBER
CT2939



SCHEMATIC

METRIC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLE .X ± 0.8 ± 2° .XX ±0.25 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610				
		APPROVALS	DATE	TITLE				
THIRD ANGLE PROJECTION	MATERIAL	DRAWN	WDH	7/12/99	BNC(f) w/4 mm BANANA PLUGS			
	CHECKED							
	FINISH	ENGR.			SIZE	CAGE CODE	DWG. NO.	REV.
		DESIGN ACTIVITY			A	43F45	P293900	A
					SCALE	1:1	SHEET 1 OF 1	