



THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

- BNC FEMALE WITH 4 mm BINDING POSTS
APPLICATION: ADAPTS BNC MALE CONNECTOR TO 4 mm BINDING POSTS TO ACCEPT SPADE LUGS, WIRES AND BANANA PLUGS.
- SPECIFICATIONS:
INSULATOR: POLYAMIDE (NYLON), BLACK
BINDING POSTS CONTACTS: BRASS, NICKEL PLATED
BNC(f): BRASS. CENTER CONTACT, GOLD PLATED.
- RATING:
VOLTAGE: 500 V
CURRENT: 3 A MAX.
RESISTANCE: <0.8 mΩ.
TEMPERATURE: -20° C TO +80° C.
- STANDARD PACKAGING: 5 PCS PER PACK.
- RoHS 2 COMPLIANT.

PART NUMBER

CT2941

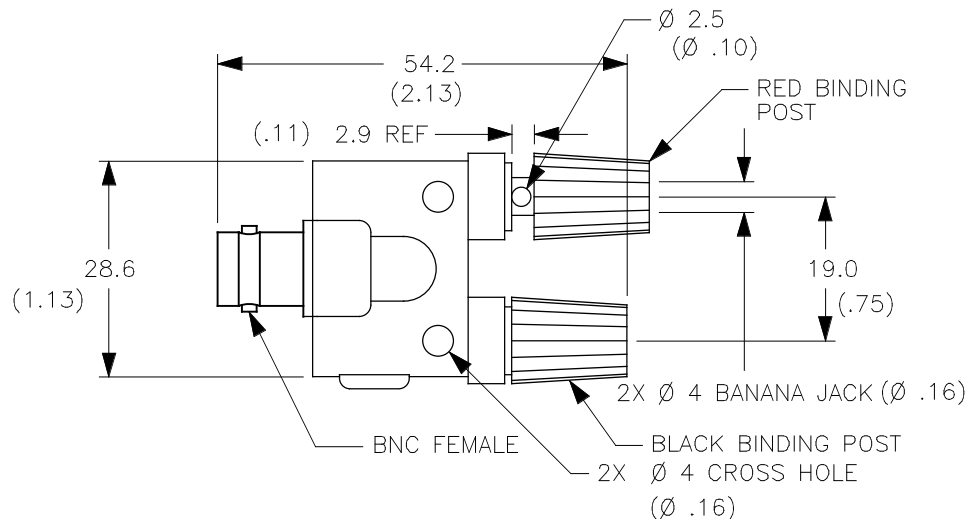

SCHEMATIC

METRIC

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
DECIMALS ANGLE
.X ± 0.8 ± 2°
.XX ± 0.25
DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS

DATE

DRAWN WDH

7/12/99

CHECKED

ENGR.

DESIGN ACTIVITY


Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

BNC(f) w/4 mm BINDING POSTS

THIRD ANGLE PROJECTION



MATERIAL

FINISH

SIZE
A

CAGE CODE
43F45

DWG. NO.

P294100

REV.
A

SCALE 1:1

SHEET 1 OF 1