




HIPOT ANALYZER MODEL 19056/19057 SERIES

The Chroma 19056/19057 Hipot Analyzer is specifically designed for testing and analyzing ultra-high withstand voltage. This series of models includes 10kVac/12kVdc/20kVdc with maximum AC20mA/DC10mA output capable of performing AC/DC withstand voltage and insulation resistance tests as well as contact check for production line testing. In addition to the patented Open Short Check (OSC), High Voltage Contact Check is added to test the components with high insulation capability for high voltage output to improve the testing reliability and efficiency.

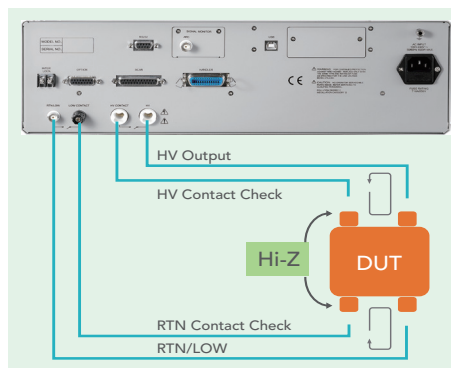

The 19056/19057 Series with Ground Fault Interrupt (GFI) is designed to protect operator's safety when abnormal ground current (A2-A1) occurs.

The Hipot Analyzer mainly provides high withstand voltage test and analysis for optical couplers, HV relays, HV switches, and PV modules components, which have better insulation capability.

Charge and discharge are required for capacitive components when conducting the DC withstand voltage test. The Hipot Analyzers have fast charging functions that can increase the production test efficiency.


The entire series includes a Flashover (ARC) detection function allowing discharge level analysis through the start voltage, end voltage, and number of steps and time. Discharge Level Analysis (DLA) mode provides detection of Flashover (ARC) and Breakdown (high limit). When a defect is detected in the test, the 19056/19057 will show the withstanding voltage to indicate the Flashover Start Voltage (FSV) or Breakdown Voltage (BDV) respectively. In addition, external Oscilloscopes can be used with the unit to check the waveform at the same time during analysis. Analysis of the test results the 19056/19057 Hipot Analyzer provides allows R&D engineers the knowledge to increase quality and performance of insulation components.




MODEL 19056 19057 SERIES

KEY FEATURES

- 10kV AC & 20kV DC withstand voltage test
- 0.1MΩ~50GΩ insulation resistance test
- Breakdown Voltage test (BDV)
- Flashover Detection (ARC)
- High Voltage Contact Check (HVCC)
- High Frequency Contact Check (HFCC)
- Open Short Check (OSC)
- Ground Fault Interrupt (GFI) for human protection circuit
- Fast charge/discharge function
- Programmable output & test limit
- Standard USB, RS232 & HANDLER interfaces
- Optional GPIB interface
- CE Mark

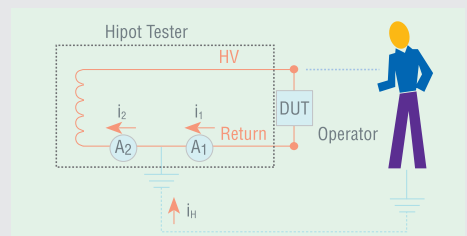

Ground Fault Interrupt (GFI)


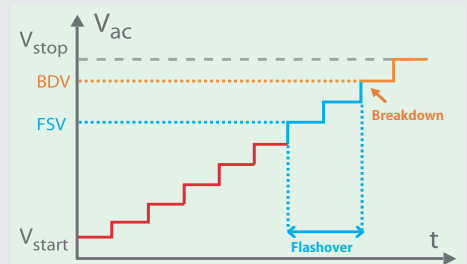


Discharge Level Analysis (DLA)



Chroma

PANEL DESCRIPTION

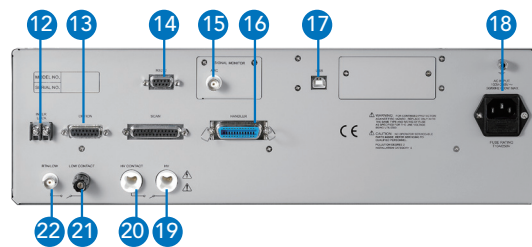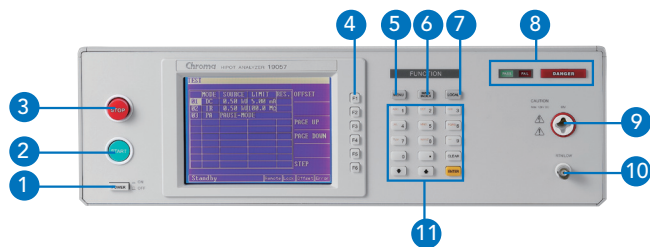

- | | | | | | | | |
|-----------------|-------------------|----------------|----------------|---------------------|-----------------------|-----------------|-----------------|
| 1. Power Switch | 4. Function Key | 7. Local Key | 10. RTN/LOW | 13. GPIB Interface | 15. ARC Signal Output | 18. Power Inlet | 21. LOW CONTACT |
| 2. Start Key | 5. Menu Key | 8. LED Display | 11. Entry Keys | (option) | 16. HANDLER Interface | 19. HV | 22. RTN/LOW |
| 3. Stop Key | 6. Main Index Key | 9. HV Output | 12. Interlock | 14. RS232 Interface | 17. USB Interface | 20. HV CONTACT | |

SPECIFICATIONS

Model	19056	19057	19057-20
Mode	ACW	DCW	
Withstanding Voltage Test			
Output Voltage	AC: 0.1~10kV	DC: 0.1~12kV	DC : 0.1 ~ 20kV
Load Regulation	± (1% of output + 10V), Rated load		
Voltage Accuracy	± (1% of setting + 0.1% of full scale)		± (1.5% of reading + 0.1% of full scale)
Voltage Regulation	± (1% of output + 10V), Rated load		
Cutoff Current	0.001~20mA	0.0001~10mA	0.0001~5 mA
Current Accuracy	0.100mA~2.999mA :	±(1% of reading + 0.5% of full range)	
	±(1% of reading + 0.3% of full range)		
	3.00mA~20.00mA :		
	±(1.5% of reading + 0.3% of full range)		
Current Resolution	AC : 1μA	DC : 0.1μA	
Output Frequency	50Hz / 60Hz	-	
Test/Ramp/Fall/Dwell Time	0.3 ~ 999 sec., continue / 0.1 ~ 999 sec., off / 0.1 ~ 999 sec., off / 0.1 ~ 999 sec., off		
Waveform	Sine wave	-	
Insulation Resistance Test			
Output Voltage	-	DC : 0.1 ~ 5kV	
Voltage Resolution	-	2V	
Voltage Accuracy	-	1% of setting + 0.5% of full scale	1.5% of setting + 0.5% of full scale
IR Range	-	0.1MΩ ~ 50GΩ	
Resistance Resolution	-	0.1MΩ	
Resistance Accuracy	≥ 0.5kV	1MΩ ~ 1GΩ : ± 3% of reading + 0.5% of full range	
		1GΩ ~ 10GΩ : ± 5% of reading + 1% of full range	
		10GΩ ~ 50GΩ : ± 10% of reading + 1% of full range	
<0.5kV	-	1MΩ ~ 1GΩ : ± 5% of reading + (0.5*500/Vs)% of full scale	
Flashover Detection			
Setting Mode	Programmable setting		
Detection Current	AC : 1mA~20mA	DC : 1mA~10mA	
Contact Check Function			
Contact Check	OSC (open/short check) HVCC(High Voltage contact check) HFCC (High Frequency Contact Check)	HVCC(High Voltage contact check) HFCC (High Frequency Contact Check)	HVCC(High Voltage contact check) HFCC (High Frequency Contact Check)
Electrical Hazard Protection Function			
Ground Fault Interrupt	0.5mA±0.25mA AC, ON/OFF	-	-
Key Lock	Yes (password control)		
Interlock	YES		
GO/NG Judgment Window			
Indication, Alarm	GO : Short sound, Green LED; NG : Long sound, Red LED		
Memory Storage	100 sets ,max. 50 steps per set		
Interface	Standard-RS232, Handler interface ,USB , SCAN Optional - GPIB interface		
General			
Operation Environment	Temperature: 0℃ ~ 45℃ ; Humidity: 15% to 95% R.H@ ≤ 40℃		
Power Consumption	600VA		
Power Requirements	100~240Vac, 47~63Hz		
Dimension (HxWxD)	130x430x500 mm/5.12x16.93x19.69 inch		
Weight	28kg / 61.7 lbs		

All specifications are subject to change without notice


ORDERING INFORMATION

19056 : Hipot Analyzer AC10kV
 19057 : Hipot Analyzer DC12kV/IR
 19057-20 : Hipot Analyzer DC20kV/IR
 A190355 : 19" rack mounting kit
 A190356 : GPIB interface
 A190519 : HV contact check box
 A190702 : 40kV high voltage testing rod
 A190708 : ARC (Flashover) verification fixture

Get more information by downloading Chroma ATE Solutions APP



iOS



Android

Search Keyword

19056 or 19057

HEADQUARTERS
 CHROMA ATE INC.
 66 Huaya 1st Road,
 Guishan, Taoyuan
 33383, Taiwan
 T +886-3-327-9999
 F +886-3-327-8898
 www.chromaate.com
 info@chromaate.com

U.S.A.
 CHROMA SYSTEMS
 SOLUTIONS, INC.
 19772 Pauling,
 Foothill Ranch,
 CA 92610
 T +1-949-600-6400
 F +1-949-600-6401
 www.chromausa.com
 sales@chromausa.com

EUROPE
 CHROMA ATE
 EUROPE B.V.
 Morsestraat 32,
 6716 AH Ede,
 The Netherlands
 T +31-318-648282
 F +31-318-648288
 www.chroma.eu.com
 sales@chromaeu.com

CHROMA ATE GERMANY
 Südtiroler Str. 9, 86165,
 Augsburg, Germany
 T +49-821-790967-0
 F +49-821-790967-600
 support-germany@chromaeu.com

JAPAN
 CHROMA JAPAN
 CORP.
 888 Nippa-cho,
 Kouhoku-ku,
 Yokohama-shi,
 Kanagawa,
 223-0057 Japan
 T +81-45-542-1118
 F +81-45-542-1080
 www.chroma.co.jp
 info@chroma.co.jp

KOREA
 CHROMA ATE
 KOREA BRANCH
 3F Richtgether
 Center, 14,
 Pangyoeyeok-ro 192,
 Bundang-gu,
 Seongnam-si,
 Gyeonggi-do
 13524, Korea
 T +82-31-781-1025
 F +82-31-8017-6614
 www.chromaate.com
 erica.shih@chromaate.co.kr

CHINA
 CHROMA ELECTRONICS
 (SHENZHEN) CO., LTD.
 8F, No.4, Nanyou Tian
 An Industrial Estate,
 Shenzhen, China
 T +86-755-2664-4598
 F +86-755-2641-9620
 www.chroma.com.cn
 info@chromaate.com

SOUTHEAST ASIA
 QUANTEL PTE LTD.
 (A company of Chroma Group)
 46 Lorong 17 Geylang # 05-02
 Enterprise Industrial Building,
 Singapore 388568
 T +65-6745-3200
 F +65-6745-9764
 www.quantel-global.com
 sales@quantel-global.com