



SCREW FEEDERS FOR MANUAL PICKUP

- Improve productivity — screw dispensed for easy pick-up
- Magnetic pick-up of ferrous screws
- Precise vibration control allows feeding of many different screw types and sizes
- Adjustable drum rotation timer, vibration timer, and vibration intensity
- Individual driver motors for vibration and feeding
- Auto shut-off of vibration/feed when not in use
- Quiet operation
- Simple service and set-up
- Great value — very cost effective way to increase productivity
- Small size — does not clutter work space
- Includes AC adapter, set-up tools and shims

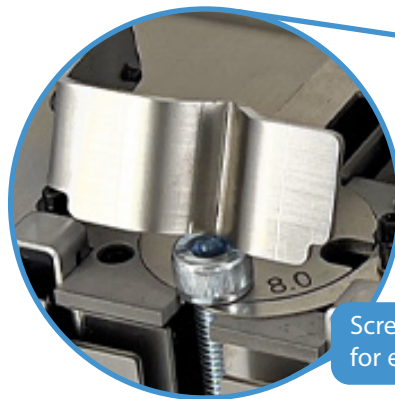

Screwdriver bit guide for easy engagement



Model	Dimensions (L x W x H)	Weight (w/o adapter)	Power Source	AC Adapter	Applicable Screw	Max Screw Thread Length
DRFF-520SS	182 x 126 x 147 mm	2.49kg / 5.5lbs	100–240VAC	15VDC	M1.0–M5.0 (Adjustable)	20 mm
DRFF-208*	160 x 82 x 112 mm	1.53kg / 3.3lbs	100–240VAC	12VDC	M0.8 / M1.0 / M1.2 / M1.4 / M1.7 / M2.0	8 mm
DRFF-508*	182 x 124 x 150 mm	3.1kg / 6.8lbs			M0.8 / M1.0 / M1.2 / M1.4 / M1.7 / M2.0 / M2.3 / M2.6 / M3.0 / M3.5 / M4.0 / M5.0	8 mm
DRFF-519*	182 x 124 x 150 mm	3.1kg / 6.8lbs			M1.2 / M1.4 / M1.7 / M2.0 / M2.3 / M2.6 / M3.0 / M3.5 / M4.0 / M5.0	19 mm
DRFF-519E* (Extended Rail)	216 x 126 x 150 mm	3.1kg / 6.8lbs			M1.2 / M1.4 / M1.7 / M2.0 / M2.3 / M2.6 / M3.0 / M3.5 / M4.0 / M5.0	19 mm
DRFF-530* (600cc Hopper)	249.5 x 162.5 x 175 mm	5 kg / 11.0 lbs			M2.0 / M2.3 / M2.6 / M3.0 / M3.5 / M4.0 / M5.0 / M6.0	30 mm
DRFF-535*	292.5 x 190 x 210 mm	7 kg / 15.4 lbs			M2.0 / M2.3 / M2.6 / M3.0 / M3.5 / M4.0 / M5.0 / M6.0 / M8.0	35 mm

*To order, add screw size to model number as a suffix (eg.— for a DRFF-519 with M1.4 screws specify 'DRFF-519-1.4')