


Note:

For additional information on the use and maintenance of foot grounders please ask for Technical Bulletins TB-2020.

DESCO

Description:

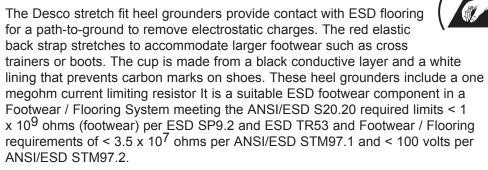

Components:

D

- A. 0.060" thick, 1.50" wide, dual layer, a black conductive exterior with a white non-marring interior.
- B. 3/8" wide, 30" long blue (07523) or black (07522) polyester tab contains electrically conductive carbon suffused fibers for long life expectancy.
- C. 3/4" wide, blue (07523) or black (07522) elastic material stretches for comfort.
- D. 1" wide, red elastic backing stretches for comfort and fit.
- E. Adjustable snap-loc fastening system.
- F. Includes one megohm current limiting resistor.
- (UL) listed for safety and date coded.

Tab to cup resistance:

 $1 \times 10^{6} < 1 \times 10^{8}$ ohms per ESD SP9.2 & ESD TR53

Item	Size	
<u>07522</u>	Regular	(h
<u>07523</u>	Large	(h)

Our UL listed foot grounders are rated at 250 VAC. It is not recommended to use them where exposure to line voltages above 250 VAC is possible. Caution: The foot grounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

Meets the requirements of ANSI/ESD S20.20 tested per ESD SP9.2 and ESD



Made in the United States of America

STRETCH FIT HEEL GROUNDER WITH SNAP LOC

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com PHONE (909) 627-8178 FAX (909) 627-7449

DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407 PHONE (781) 821-8370 FAX (781) 575-0172



