

GENERAL[®]

RH/Temp Mini Data Logger

Ideal for water damage restoration, process control and environmental monitoring

Features:

- One button starts/stops logging without a PC
- Includes disc with software used to set sampling time from 10 seconds to 12 hours; Hi and Lo alarm setpoints for humidity and temperature; Temperature unit (°F or °C)
- Software also calculates GPP/GPK mixing ratio, dew point and wet bulb temperatures
- Stores more than 16,000 pairs of RH & Temp readings
- One click exporting of logs to Excel
- Includes non-rechargeable 3.6V Lithium-ion battery

Specifications:

Temperature Range: -4° to 158°F (-20° to 70°C)

Temperature Accuracy:

±1.8°F (1°C) from 14° to 104°F (-10° to 40°C);
±3.6°F (2°C) elsewhere in range

Humidity Range: 0 to 100%

Humidity Accuracy:

±3% from 20 to 80% RH; ±3.5% elsewhere

Includes:

Battery, User's Manual, Warranty



No. HT08




CE
RoHS

GPP
g/kg

USB

WET
BULB

DEW
POINT

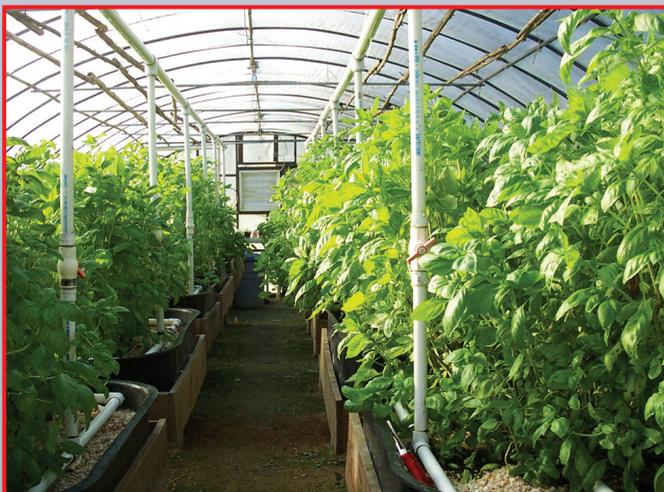

Monitor greenhouse humidity and temperature



Monitor a climate-controlled food warehouse

GENERAL[®]

General Tools & Instruments

80 White Street, New York, NY 10013-3567

TEL: 212. 431. 6100 TOLL FREE: 800. 697. 8665

sales@generaltools.com www.generaltools.com

HT08SS Printed in USA 03/31/15

1 Year
Limited
Warranty



General Tools & Instruments



GeneralToolsNYC



Indicates optional NIST calibration is available