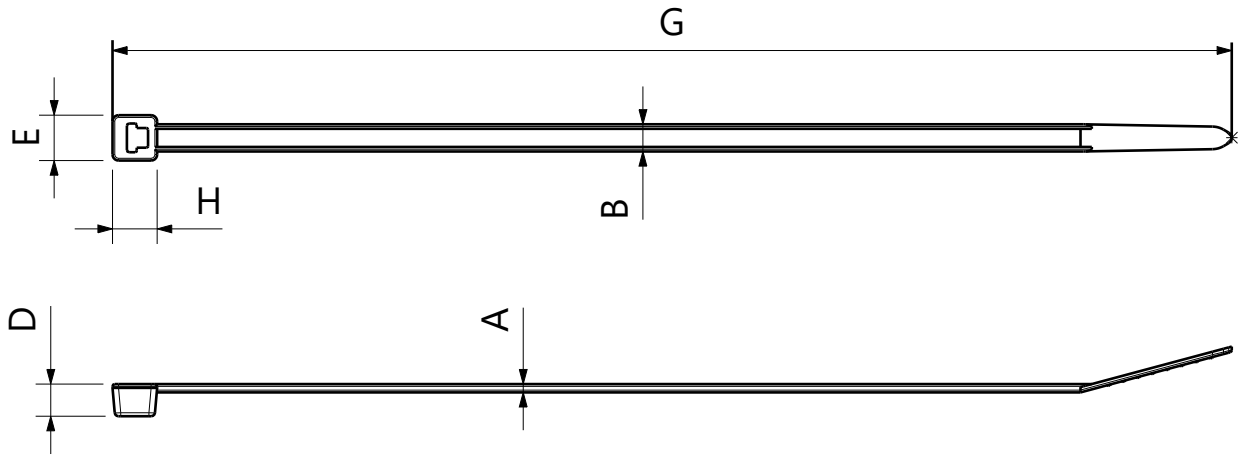


Product code 型号	Material 材料	Color 颜色	Continuous Operation Temperature 适用温度范围	Flame Rating 耐燃性	A	B	D	E	G	H
T30R	尼龙66（聚酰胺66） 66 Nylon (Polyamid 66)	Natural/自然色 (4)	-40℃~+85℃	UL94V-2	1.2±0.2	3.5±0.2	4.5±0.5	6.1±0.5	(1) 150.0±5.0	5.9±0.5
T30R	尼龙66（聚酰胺66） 66 Nylon (Polyamid 66)	Milky White/乳白色	-40℃~+85℃							
T30R-B	尼龙66（聚酰胺66） 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+85℃							
T30R-W	尼龙66（聚酰胺66）耐候型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+85℃							
T30R-HS	尼龙66（聚酰胺66）耐热型 66 Nylon (Polyamid 66)	Light Green/浅绿色 (4) (3)	-40℃~+105℃							
T30R-HSW	尼龙66（聚酰胺66）耐热，耐候型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+105℃							
T30R-HSB	尼龙66（聚酰胺66）耐热型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+105℃							
T30R-HR (2) (5)	尼龙46（聚酰胺46） 46 Nylon（Polyamid 46)	Natural/自然色	-40℃~+130℃ (5)							
T30R-V0	尼龙66（聚酰胺66）难燃型 66 Nylon (Polyamid 66)	White/白色	-40℃~+85℃	UL94V-0						
T30R-V0B	尼龙66（聚酰胺66）难燃型 66 Nylon (Polyamid 66)	Black/黑色	-40℃~+85℃							
T30R-HR	尼龙46（聚酰胺46） 46 Nylon（Polyamid 46)	Gray/灰色	-40℃~+130℃ (5)	UL94V-2						
T30R-HS	尼龙56（聚酰胺56）(6) 56 Nylon（Polyamid 56)	Black黑色	-40℃~+105℃	UL94V-2						
T30R-HIRHSUV	尼龙66（聚酰胺66）高抗冲击改性型、热稳定型、耐紫外线型 (7) 66 Nylon (Polyamid 66)	Black黑色	-40℃~+110℃	UL94 HB						

Note:
1.适用绑扎工具
Applicable Tool
MK7,MK8,MK9RE-F
2.标准包装
Standard Packing
100根/袋，120袋，共12000根/箱
100Pcs/Pag,120bags，Total 12000pcs/box
3.最小环形拉断力
Min.Loop Tension Strength
135N
4.捆扎直径(mm)
Bundle Diameter
1.0 to 36.0
5.UL编号
UL File-No.
E193818

Revision Level			Revision Record
Drawing	State	Part	Add Material PA66HIRHSUV-BK
07.1	□□□□		
Changed	Date (YYYY/MM/DD)		
Wang.Simon	2025/05/07		
Approved	Date (YYYY/MM/DD)		
Robert.Zhu	2025/05/07		

All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
HuangSheng	2008/12/02
Approved	Date (YYYY/MM/DD)
韩书国	2008/12/02

Units: mm

HellermannTyton
www.HellermannTyton.com

Title: T30R Series

Drawing-No: 10-0031-001-CSC

Scale: 1:1
Global Project Number: 10-0031
Format: A4
Sheet: 1 / 1