


CATIA V5


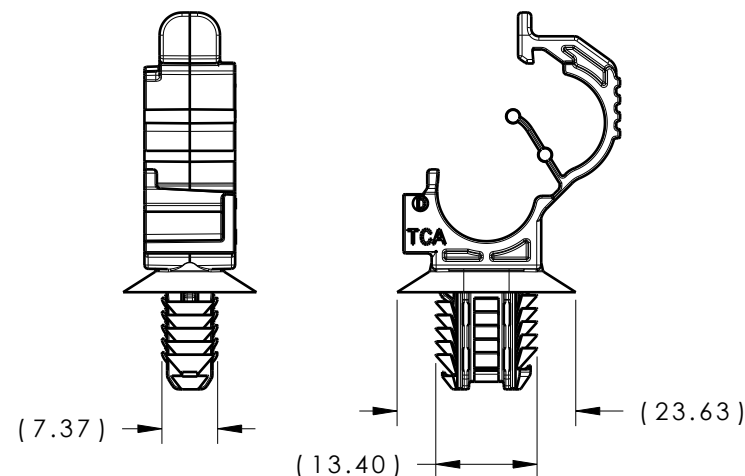
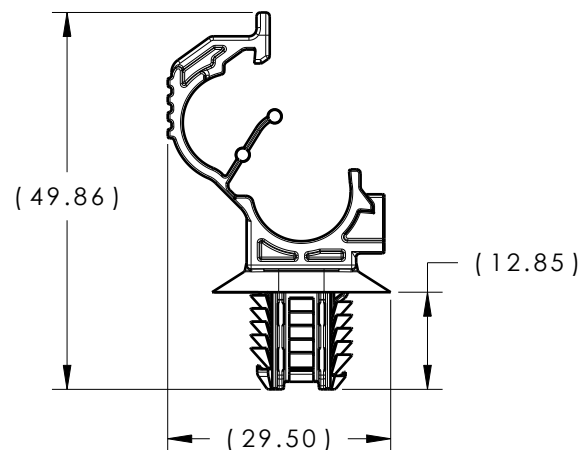
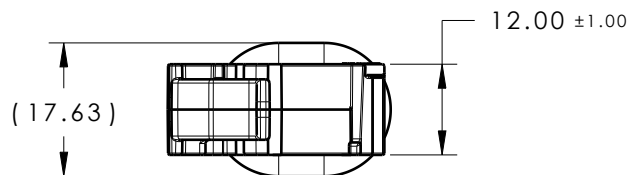



07.2

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.75mm
4. APPLICABLE OVAL HOLE SIZES:
 - A. 6.2 X 12.2mm +/-0.2
 - B. 6.5 X 12.5mm +0.2/-0.4
 - C. 6.5 X 13.0mm +/-0.2
 - D. 7.0 X 12.0mm +/-0.2
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
6. MAX ALLOWABLE FLASH TO BE: 0.5mm
7. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

ISOMETRIC VIEW
OPEN POSITIONISOMETRIC VIEW
CLOSED POSITION

07.2

GLOBAL PART DESCRIPTION

LOC5-9FTOVAL-PA66HIRHSUV-BK

LOC5-9FTOVAL-PA66HIRHS-OG

MATERIAL

PA66HIRHSUV

PA66HIRHS

COLOR

BLACK

ORANGE RAL 2003

Material

SEE CHART
COLOR: SEE CHART

Units

millimeters

Tolerance defined on
each dimension

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Drawn

KVH

2/4/13

Approved

SJA

4/1/13

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No

LOC5-9FTOVAL

Title

LOCKING OMEGA CLIP (5 TO 9mm
BUNDLE) WITH OVAL FIR TREE

Drawing-No

12-0430-021-CSU

PRODUCTION : Phase

Scale

1:1

Project Number

12-0430

Format

AH

Sheet

1/1