


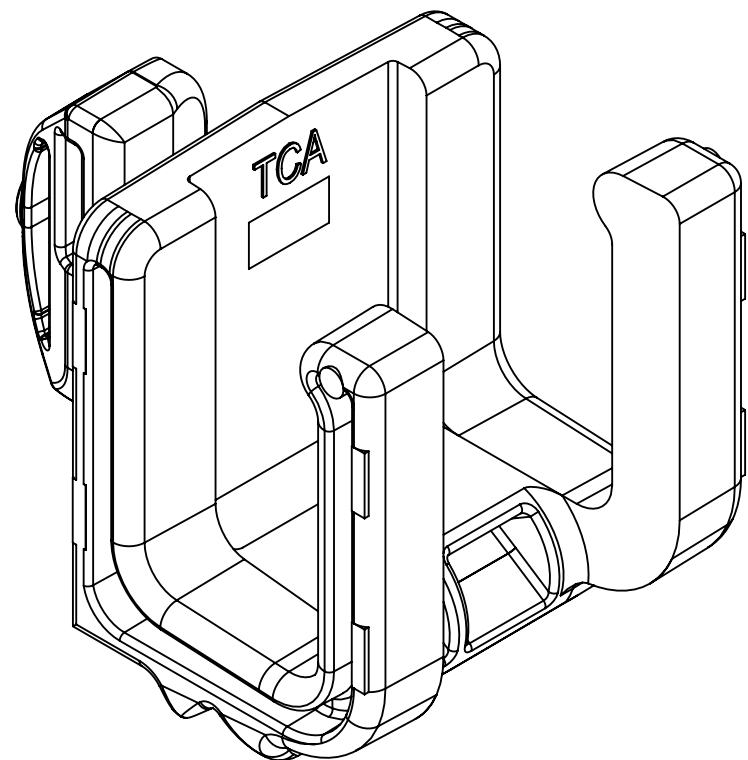
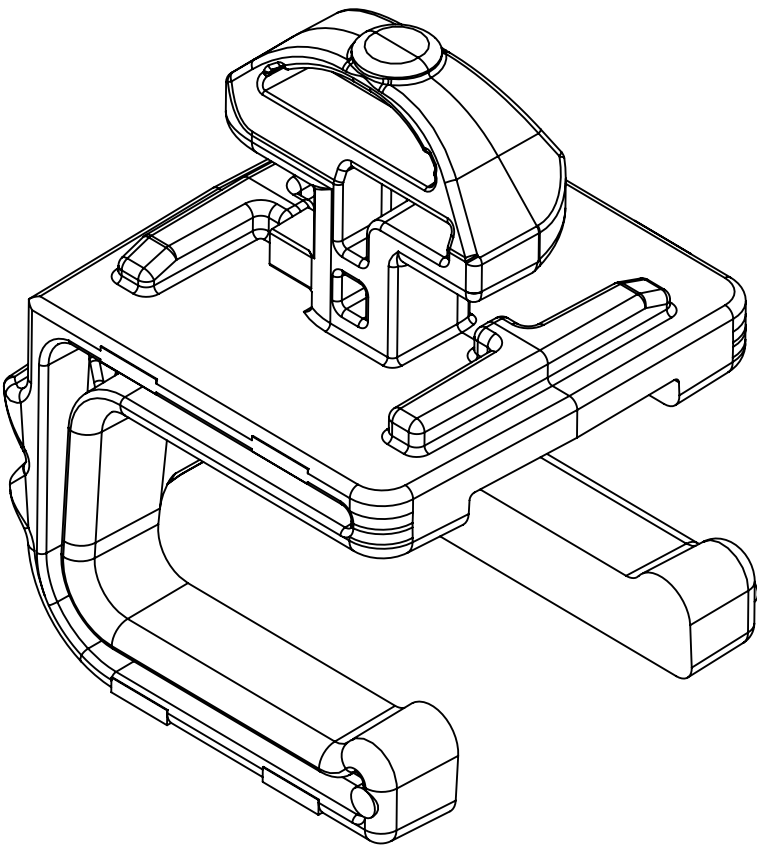


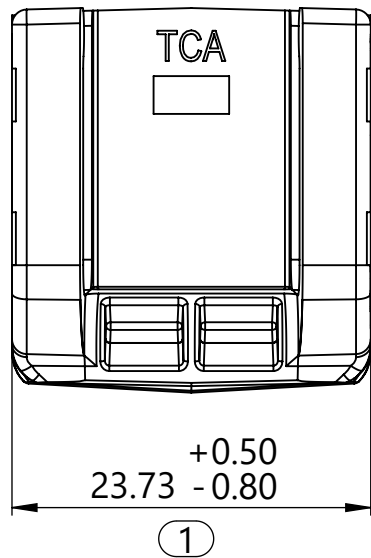



Vertical Face Orientation
Scale 3 : 1

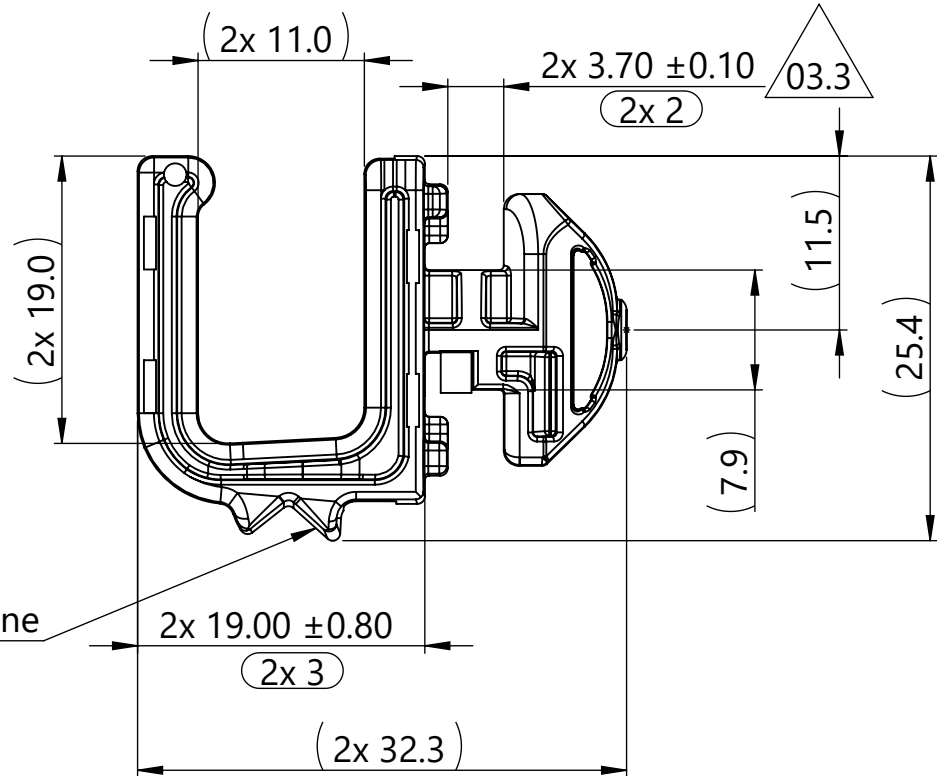

Downward Face Orientation
Scale 3 : 1

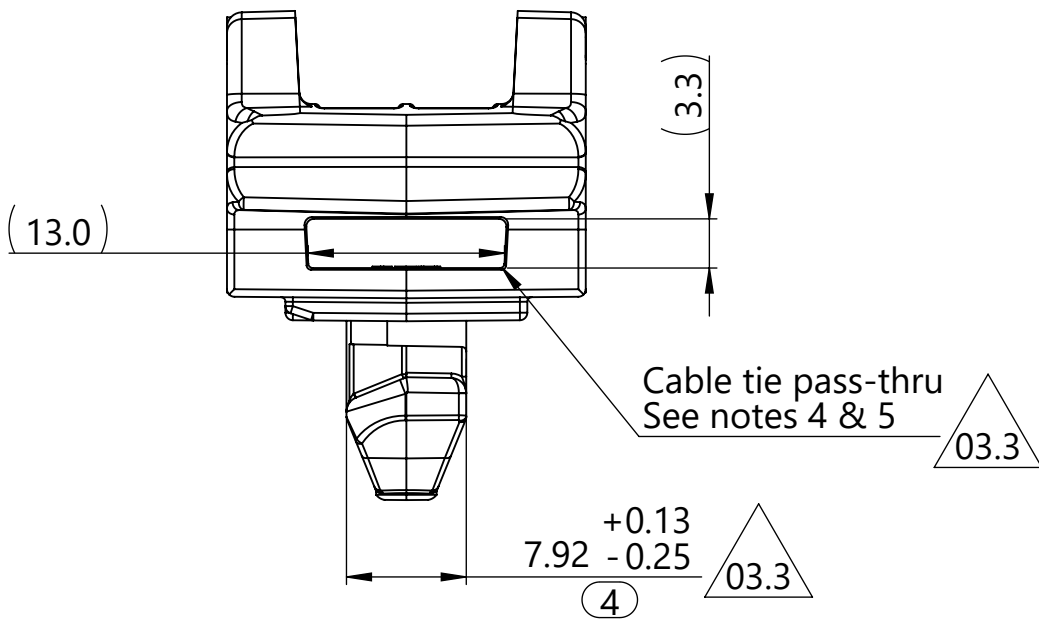

- 03.3 Initial Mold Validation:
1. PA66HIRHS(REC) performance requirements are validated at 50% relative humidity equilibrium (2.5±0.25% H2O by weight)
 2. Performance
 - A. Downward Face Load
 - a. 67 N [15 lbf] minimum with cable tie
 - B. Vertical Face Load
 - a. 67 N [15 lbf] minimum without cable tie
- 03.3 Application:
3. Accommodates 80/20 15 & 40 Series T-Slotted Profiles
 4. Accommodates cable tie series: T18 - T120
 5. Accommodates 3/8in grip tie: GT.375
- Notes:
6. Material: See chart
 7. Material color: See chart
 8. Maximum percent regrind permissible: 0%
 9. Maximum allowable flash to be: 0.25mm
 10. Maximum allowable mismatch to be: 0.10mm
 11. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 8
 - b. Last number used: 6
 - c. Missing symbols: -

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title CTCM11CZF 11mm Cradle with Frame Mount and CutZone				Scale 2:1	
Drawing	State	Part	ECN 312719					Mann		2024/03/19							
03.3	Design Release	-				All drawing revision are stored in CAD PDM database		Approved		Date (YYYY/MM/DD)		Drawing-No 23-0153-002-CSU				Format A3	
Changed		Date (YYYY/MM/DD)						Vaughn		2024/03/21							
Mann		2026/04/10						Units mm		HellermannTyton www.HellermannTyton.com		Sheet 1/1					
Approved		Date (YYYY/MM/DD)															
Vaughn		2026/04/14															

HellermannTyton
www.HellermannTyton.com