


Specification Sheet

Part Number: 151-03095

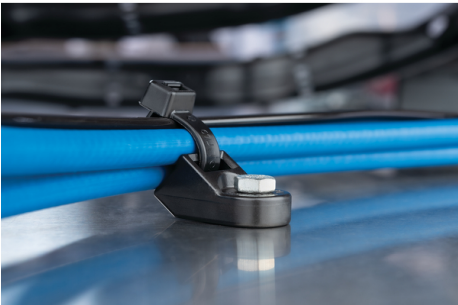

Mount and tie combination makes it easy to service bundles in the field. Eliminates the need for multiple sized diameter clamps.

Low fire hazard materials comply with stringent NFPA 130 safety standards and improve opportunities to get product specified at the engineering stage of a project.

Standard Torque Cable Tie Mount, Mtg Hole Dia. 0.25", Max Torque 115.0 in lbs, PA666V0, Black, 500/pkg

Article Number	151-03095
Type	HDM250
Color	Black (BK)
Quantity Per	carton
Product Description	These mounts contain a small tab inside the mounting hole to temporarily engage the threads, allowing assemblers to preinstall the mount on a stud before securing with a washer and a nut. For use with HellermannTyton heavy duty T120, T150 or Wide Strap Cable Ties. Low fire hazard material is designed specifically for rail applications.
Short Description	Standard Torque Cable Tie Mount, Mtg Hole Dia. 0.25", Max Torque 115.0 in lbs, PA666V0, Black, 500/pkg

Global Part Name	HDM250-PA666V0-BK
Length L (Imperial)	1.41
Length L (Metric)	36.3
Fixation Method	Screw Mounting and Rivet
Width W (Imperial)	0.76
Width W (Metric)	19.3
Height H (Imperial)	0.67
Height H (Metric)	17.0
Cable Tie Width Max (Imperial)	0.5
Cable Tie Width Max (Metric)	12.7
Mounting Hole Diameter D (Imperial)	0.25
Mounting Hole Diameter D (Metric)	6.2 mm
Stud Diameter (Metric)	6.2 mm
Stud Diamater (Imperial)	0.24

Material	Polyamide 6.6/6, V0 (PA666V0)
Material Shortcut	PA666V0
Flammability	Low smoke generation Limited fire hazard Low generation of toxic gases and corrosive acid UL 94 V-0 Halogen-free
Halogen Free	Yes
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +248°F (-40°C to +120°C)
Maximum Torque (kgf-cm)	132.45
Maximum Torque (lbf-ft)	9.58
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	ASTM 1354 ASTM E 162 Exova NFPA130: 2017 ASTM E 662
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

