



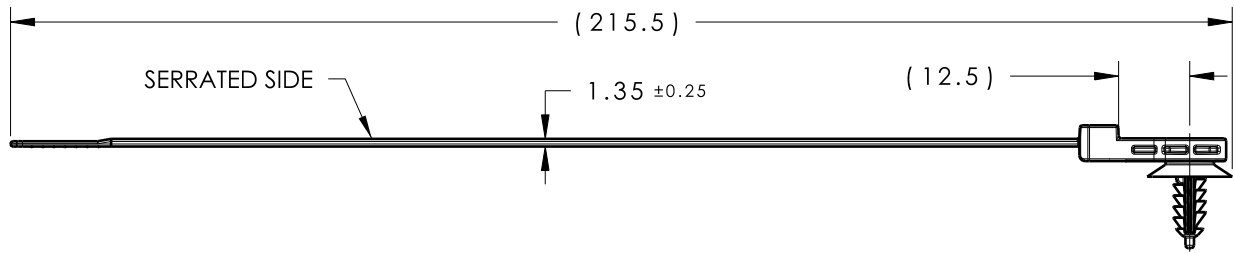


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.1	Design Release	A	SEE ECN# 013284	CJR	10/21/15	KVH	10/21/15

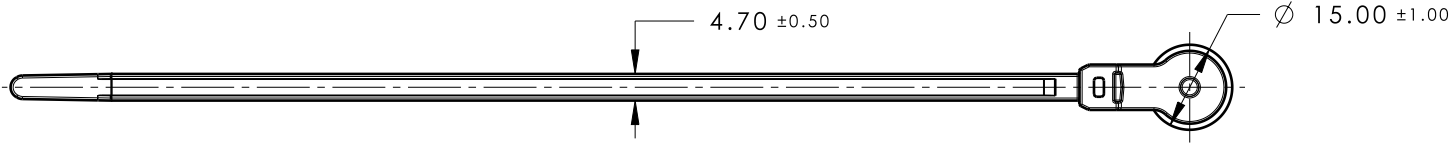

ASSEMBLY VIEW



ISOMETRIC VIEW
SCALE 1:2

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE.
3. APPLICABLE HOLE SIZE:
A. M6 THREADED
4. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
5. BUNDLE RANGE: 2.0mm TO 50.0mm

PRODUCT NUMBER CROSS REFERENCE RECORD	
TYPE NUMBER	UNS-UNIVERSAL NUMBER SYSTEM
T50ROSFTM6SO12.5B	157-00131

Material PA66HIRHS COLOR: BLACK	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	4/2/15	Article/Type-No SEE CHART	Scale	3:4	
	Tolerance defined on each dimension	Approved		KVH	4/2/15	Title T50ROS WITH 12.5mm OFFSET AND M6 THREADED HOLE (B-SERIES)		Project Number	15-0349	
		 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No		PRODUCTION : Phase	Format	AH	
					15-0349-001-CSU		Sheet	1/1		