


## Specification Sheet

Part Number: 161-46100

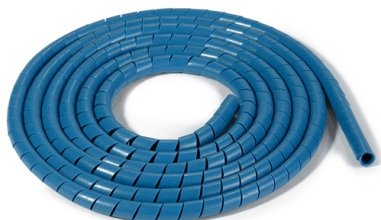

Industry standard blue color assists with visual detection and reduces the risk of contamination.

High stainless-steel content is both detectable and corrosion resistant.

Open design accommodates breakouts at any point along the bundle.

Spiral design makes it suitable for retro-fitting.

Spiralwrap Metal-Content, 0.16" Diameter, PE/SS, Blue, 98 ft/roll

Article Number 161-46100

Type SBPEMC4

Color Blue (BU)

Quantity Per carton

Product Description SBPEMC provides flexible, durable cable and hose protection. It is ideal for food-processing machines and related environments. Protects against abrasion, making it appropriate for applications where movement is an issue.

Short Description Spiralwrap Metal-Content, 0.16" Diameter, PE/SS, Blue, 98 ft/roll

Global Part Name SBPEMC4-PE/SS-BU

| Variant                        | Spiral Binding                         |
|--------------------------------|--|
| Bundle Diameter Min (Imperial) | 0.20                                   |
| Bundle Diameter Min (Metric)   | 5                                      |
| Bundle Diameter Max (Imperial) | 0.79                                   |
| Bundle Diameter Max (Metric)   | 20                                     |
| Diameter D (Imperial)          | 0.16                                   |
| Diameter D (Metric)            | 4                                      |
| Nominal Diameter (Imperial)    | 0.19                                   |
| Nominal Diameter (Metric)      | 4                                      |
| Wall Thickness WT (Imperial)   | 0.039                                  |
| Wall Thickness WT (Metric)     | 1.0                                    |
| Material                       | Stainless Steel (SS) Polyethylene (PE) |
| Material Shortcut              | SS PE                                  |
| Flammability                   | UL 94 HB                               |
| Halogen Free                   | Yes                                    |

Operating Temperature -76°F to +176°F (-60°C to +80°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Package Quantity (Metric) 30

Customs Number 3926909988