

Specification Sheet


Part Number: 166-90104

External NPT thread provides a secure connection.  
Snap-on construction reduces installation time and costs by eliminating the need to thread fittings onto conduits.

All-around "teeth" attach firmly to conduit and deliver a high extraction force.

Durable nylon material has high resistance to salts, oils, weak acids and solvents.

IP66 fitting has one-piece construction.

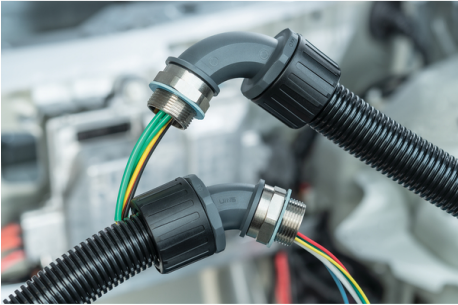

HelaGuard Non-Metallic IP66 Fitting, Straight, NPT Thread, 0.50" Dia, PA66, Black, 10/pkg

Article Number	166-90104
Type	HG050-S-0500
Color	Black (BK)
Quantity Per	bag
Product Description	HelaGuard Non-Metallic Straight fitting features a snap-on design that provides a quick, secure connection. Constructed of a very durable nylon material with a high resistance to salts, oils, weak acids and solvents. Designed for easy removal with a small screwdriver. IP66 ingress protection rated fittings.

Short Description	HelaGuard Non-Metallic IP66 Fitting, Straight, NPT Thread, 0.50" Dia, PA66, Black, 10/pkg
Global Part Name	HG050-S-0500-PA66-BK
Length L (Imperial)	1.73
Length L (Metric)	44
Variant	Straight
Outside Diameter OD (Imperial)	1.26
Outside Diameter OD (Metric)	32
Nominal Diameter (Imperial)	0.5
Nominal Diameter (Metric)	21
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V-2
Halogen Free	Yes
UV Resistant (Yes/No)	No

Operating Temperature	-58°F to +275°F (-50°C to +135°C)
-----------------------	-----------------------------------

Reach Compliant (Article 33)	Yes
------------------------------	-----

ROHS Compliant	Yes
----------------	-----

UL Recognized (US)	Yes
--------------------	-----

UL Recognized (US and Canada)	Yes
-------------------------------	-----

Package Quantity (Imperial)	10
-----------------------------	----

Package Quantity (Metric)	10
---------------------------	----

Customs Number	3926909988
----------------	------------