


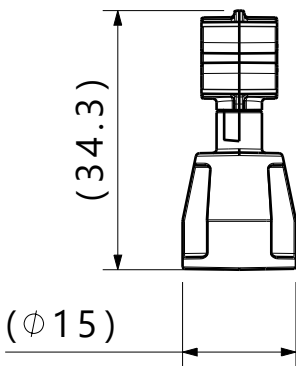


Isometric view

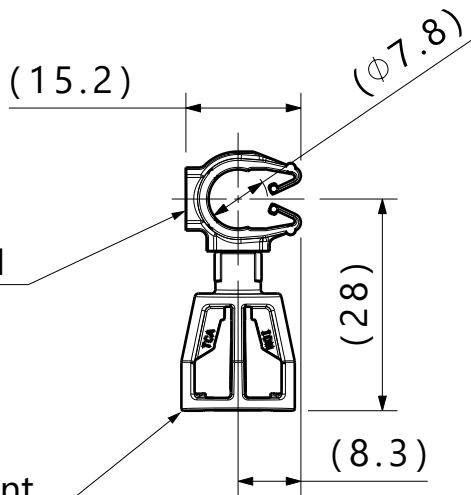

Isometric view
Rotated

Clip rotates
360 degrees**



- Reference:
- Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
 2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Max allowable flash to be: 0.25mm
 5. Max allowable mismatch to be: 0.1mm
 6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6

* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D840,799 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Soft Tube/Hose	Hard Pipe/Tube
7.5mm-8.5mm	7.0mm-8.5mm	7.9mm-8.5mm

Global Part Description			MOC8M***				Stud Mount				
			Drawing		Material	Color	Drawing	Material	Color		
			SMFMOC8M-PA66HIRHSUV-BK		16-0316-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black	
Revision Level			Revision Record			Drawn		Date (YYYY/MM/DD)	Title		
Drawing	State	Part	ECN-016984			Klos		2022/04/29			
00.0	Design Release	-			Approved		Date (YYYY/MM/DD)				
Changed		Date (YYYY/MM/DD)			Cottrill		2022/04/29				
Klos		2022/04/29									
Approved		Date (YYYY/MM/DD)						MOC8M coupled with a M5/M6 stud mount		Scale	1:1
Cottrill		2022/04/29								Global Project Number	
										19-1641	
										Format	
										A3	
										Sheet	
										1 / 1	