

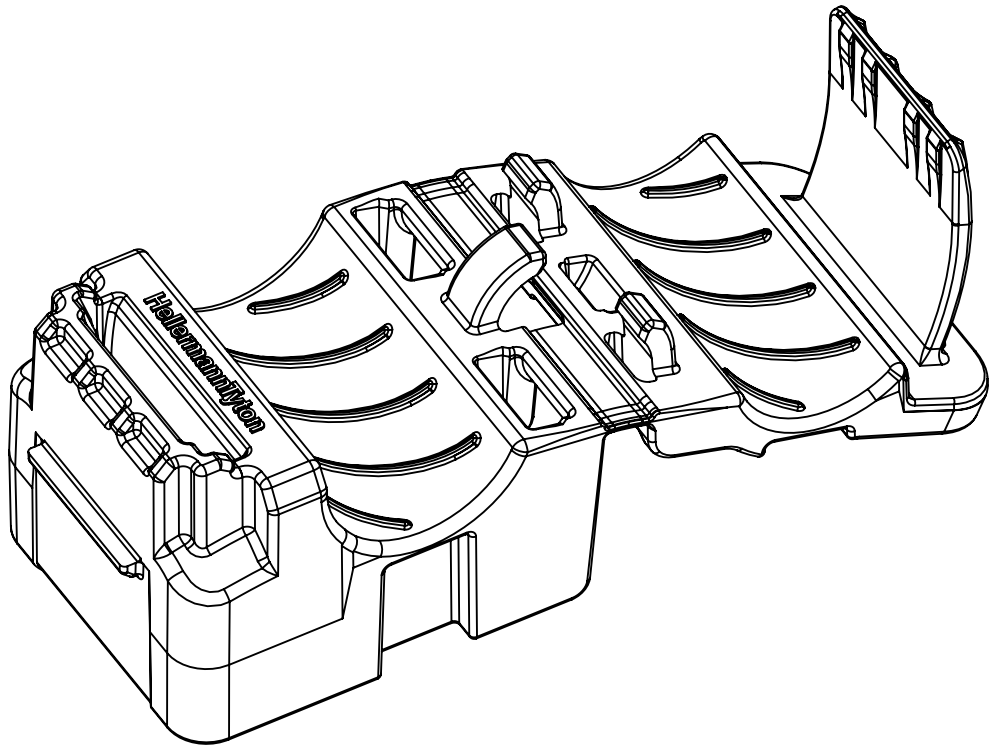



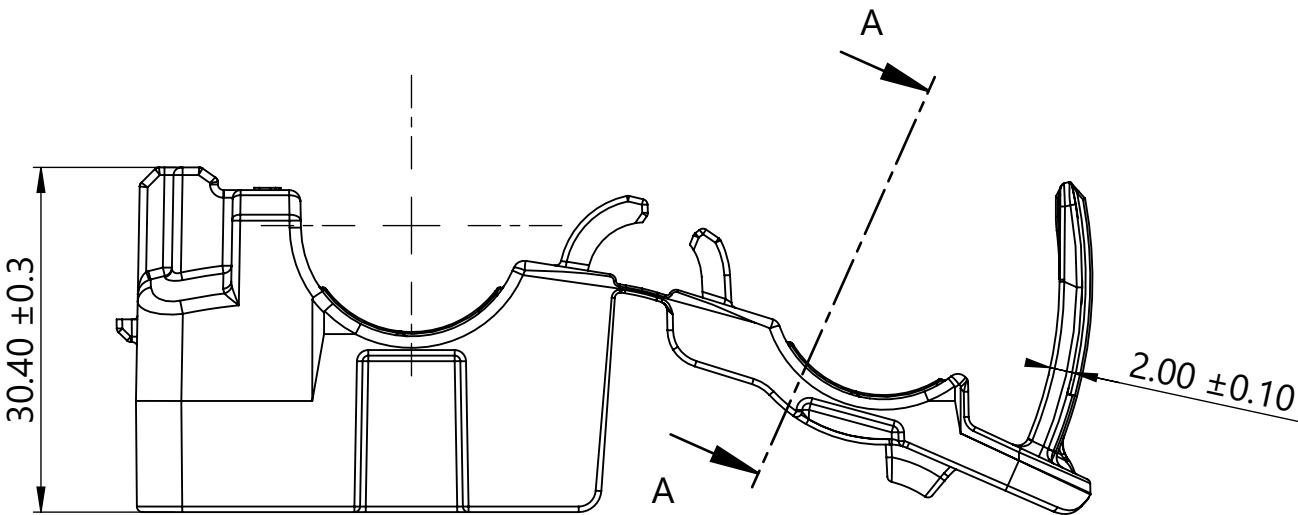


Isometric View
Product shipped in clamp open position

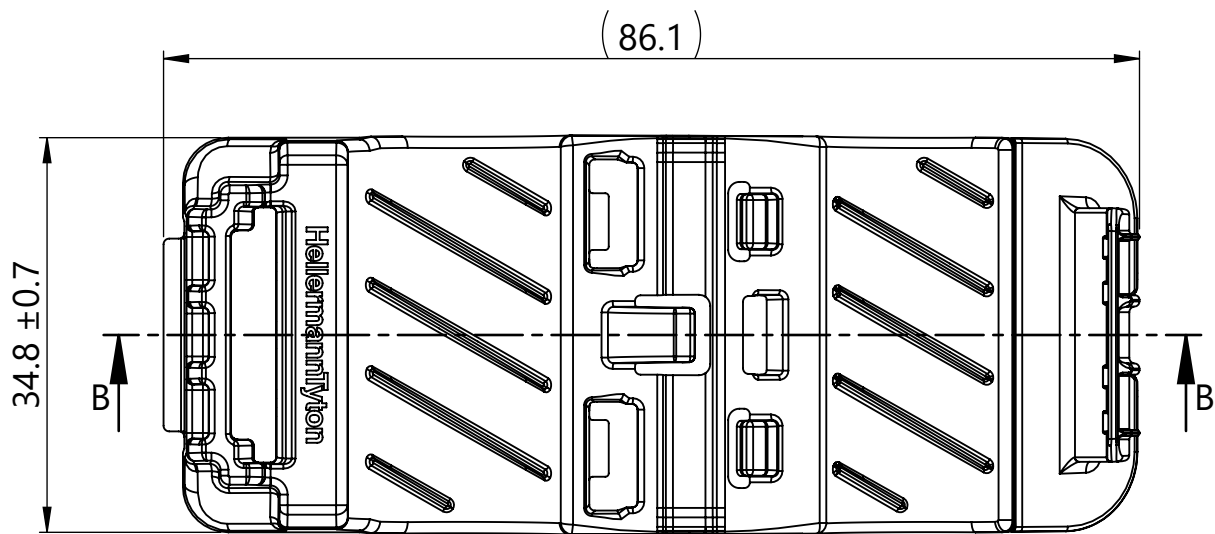


0.10 Maximum flash
or mismatch allowed
inside head

Mount size identifier

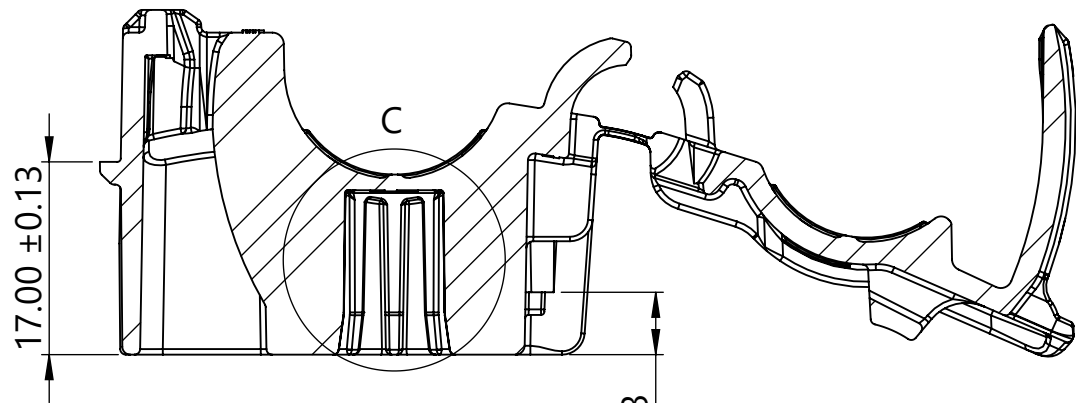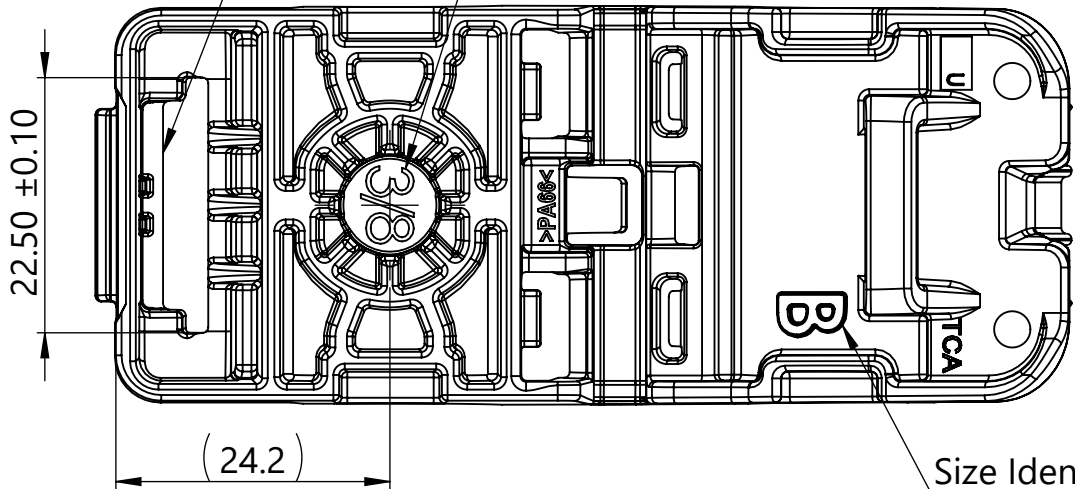


Section B-B

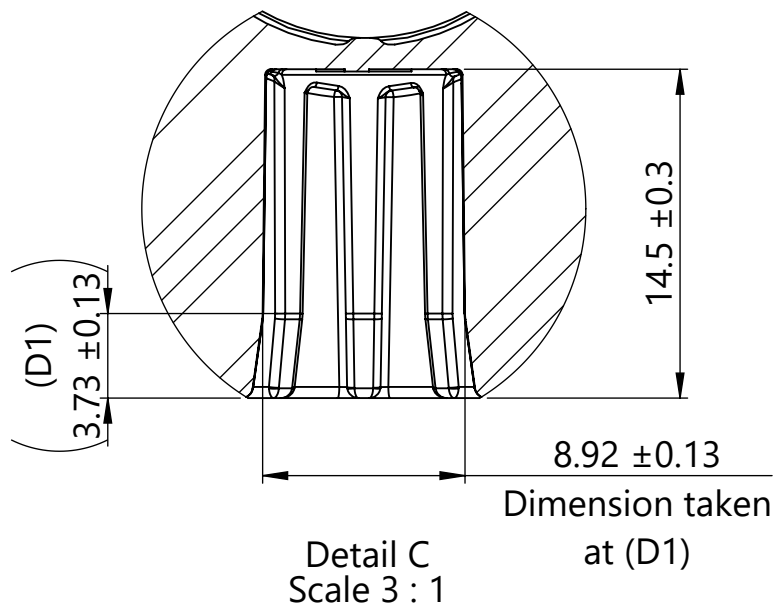


Detail C
Scale 3 : 1

0.10 Maximum
flash or mismatch
allowed around
perimeter of strap


Saddle opening
accommodates
Straps up to 13.2
wide and 2.1 thick

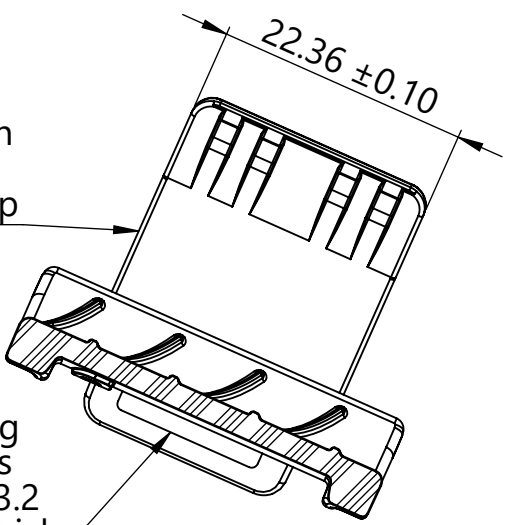

Section A-A

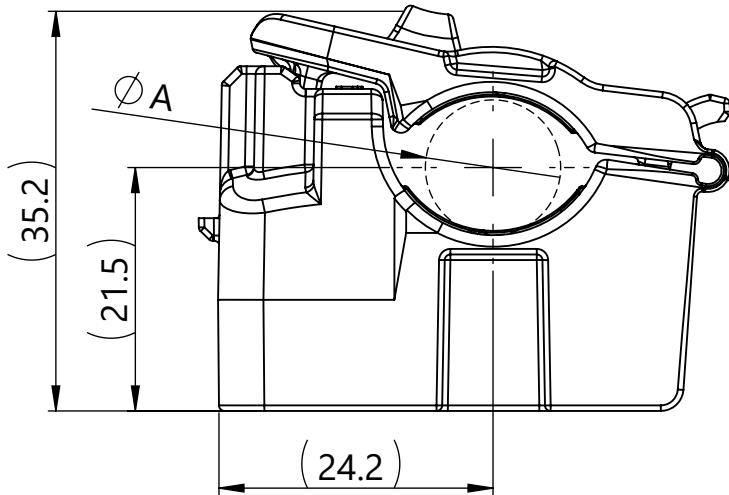

Minimum Bundle Diameter

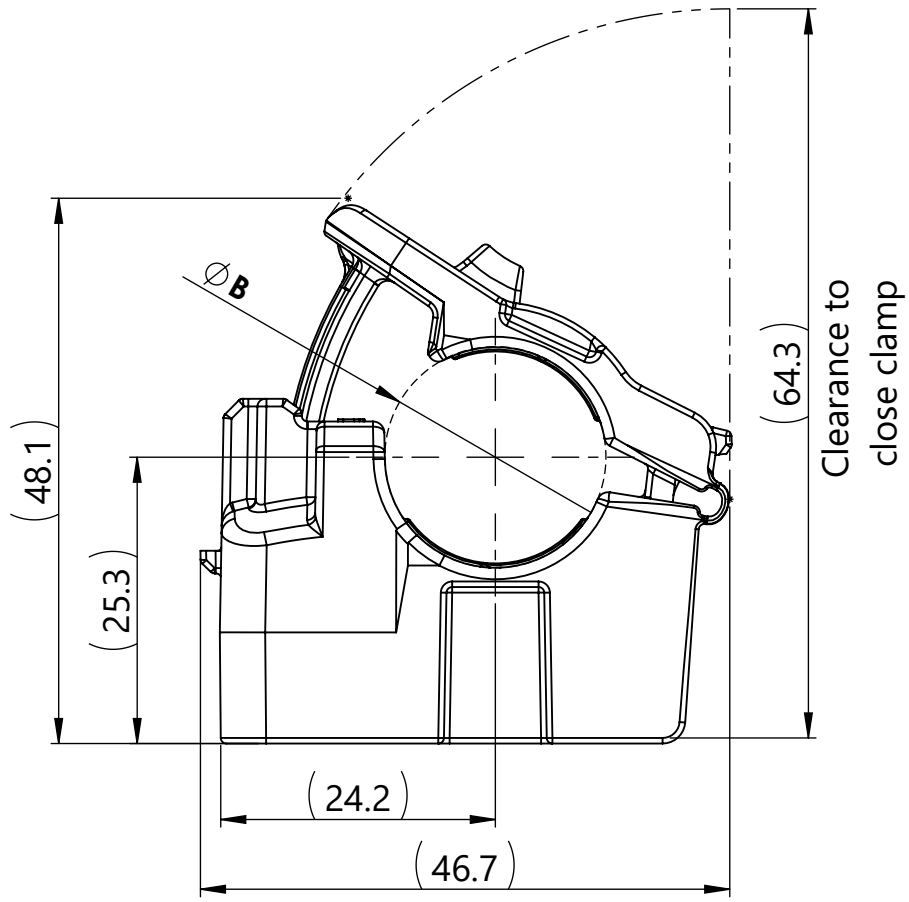

Maximum Bundle Diameter

Performance requirements:
Dry as molded with ≤ 0.5% moisture content:


1. ITS-0001 Ratchet Clamp Split Mandrel Test:
445 newtons [100 lbf] minimum at a nominal
bundle diameter of 15.88 [0.625in]

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
 5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	12.7 ±0.3	19.5 ±0.3
Hard	11.9 ±0.3	18.7 ±0.3

Global Part Number	Global Part Description	Mounting Hole Size	Type Number	Material	Color
21-0237	CMRCBTR38-PA66HIRHSUV-BK	3/8"	CMRCBTR38	PA66HIRHSUV	Black
CMRCBTR38					
Title Center Mount RCB Ratchet P-Clamp, Size B, Clamp Range 12.7 to 19.5, 3/8 inch Threaded Rod				Scale 3:2	Global Project Number 21-0237
Drawing-No 21-0237-002-CSU				Format A2	Sheet 1/1

Revision level			Revision Record		
Drawing	State	Part	ECN 016827		
00.0	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Spangler	2022/01/18				
Approved	Date (YYYY/MM/DD)				
Toll	2022/01/18				



All drawing
revision are
stored in CAD
PDM database

The copyright of this drawing is reserved by HellermannTyton.	
Units	mm

HellermannTyton
www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Spangler	2021/04/09
Approved	Date (YYYY/MM/DD)
Toll	2021/04/09