


Specification Sheet

Part Number: FC1.2AK2

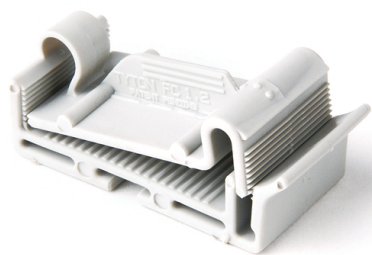

Adjustable height feature allows the clamp to close to the exact height of the ribbon cable.
Releasable for easy access to cables when necessary.

Flat Ribbon Cable Clamp, Adhesive, 1.2" Max Cable Width, 0.156" Hole Dia, PA66, Gray, 50/pkg

Article Number	154-00013
Type	FC1.2A
Color	Gray (GY)
Quantity Per	bag
Product Description	HellermannTyton's flat ribbon clamps route, protect, and secure flat ribbon cables without damage to sensitive wires and cables. The unique, adjustable height feature allows the clamp to close to the exact height of the ribbon cable, using only as much force as needed to secure the cable. The releasable feature allows simple opening when access to the cable is necessary.
Short Description	Flat Ribbon Cable Clamp, Adhesive, 1.2" Max Cable Width, 0.156" Hole Dia, PA66, Gray, 50/pkg

Global Part Name	FC1.2A-PA66-GY
------------------	----------------

Length L (Imperial)	0.81
---------------------	------

Length L (Metric)	20.57
-------------------	-------

Width W (Imperial)	1.5
--------------------	-----

Width W (Metric)	38.1
------------------	------

Height H (Imperial)	0.5
---------------------	-----

Height H (Metric)	12.7
-------------------	------

Cable Tie Width Max (Imperial)	1.2
--------------------------------	-----

Cable Tie Width Max (Metric)	30.48
------------------------------	-------

Mounting Hole Diameter D (Imperial)	0.157
-------------------------------------	-------

Mounting Hole Diameter D (Metric)	4.0 mm
-----------------------------------	--------

Mounting Hole Diameter D Min (Imperial)	0.157
---	-------

Mounting Hole Diameter D Max (Imperial)	0.157
---	-------

Mounting Hole Diameter D Max (Metric)	4.0
---------------------------------------	-----

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Adhesive	Acrylate with base of polyurethane foam
Flammability	UL 94 V-2 (excluding adhesive)
UV Resistant (Yes/No)	No
Adhesive Operating Temperature	to +230°F (+110°C)
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Package Quantity (Imperial)	50
Package Quantity (Metric)	50
Customs Number	3926909988