


Specification Sheet

Part Number: T150L9C2

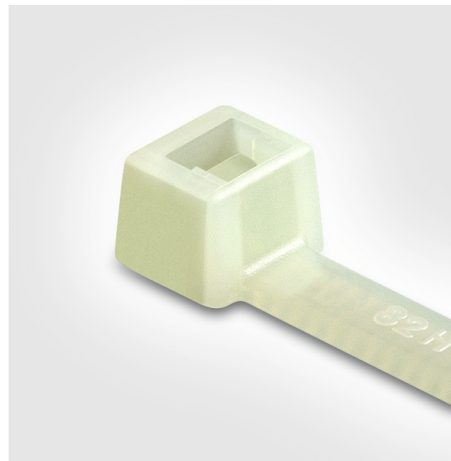

Engineered and manufactured for maximum performance and quality. Made from 100% high-quality plastic to ensure efficient recycling.

Inside serration for a strong grip onto bundles.

Easy application either manually or with a tensioning tool.

Heavy Duty Cable Tie, 32" Long, UL Rated, 175lb Tensile Strength, PA66, Natural, 100/pkg

Article Number	111-15409
Type	T150L
Color	Natural (NA)
Quantity Per	bag
Product Description	Heavy duty T-Series cable ties feature inside serrations to provide a positive hold on wire and cable bundles. Durable head design guarantees high tensile strength and a low insertion force. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.
Short Description	Heavy Duty Cable Tie, 32" Long, UL Rated, 175lb Tensile Strength, PA66, Natural, 100/pkg

Global Part Name	T150L-PA66-NA
Minimum Tensile Strength (Imperial)	175.0
Minimum Tensile Strength (Metric)	780.0
Length L (Imperial)	32.0
Length L (Metric)	820.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.35
Width W (Metric)	8.9
Bundle Diameter Min (Imperial)	0.31
Bundle Diameter Min (Metric)	8.0
Bundle Diameter Max (Imperial)	9.65
Bundle Diameter Max (Metric)	245.0
Thickness T (Metric)	1.9

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V-2
Halogen Free	Yes
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	UL-ZODZ2.E64139
UL Recognized (US)	Yes
UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes
UL Listed (US)	Yes
Package Quantity (Imperial)	100

Package Quantity (Metric)	100
---------------------------	-----

Customs Number	3926909988
----------------	------------