


Specification Sheet

Part Number: T18RA50VO

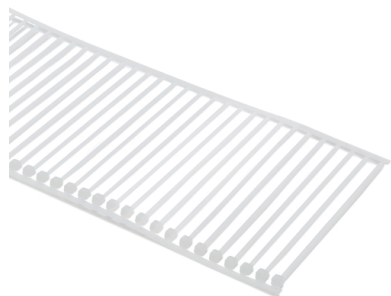

Cable ties can be easily recycled to meet environmental management objectives.

HellermannTyton 18 lb. cable ties are available in natural, black, and other colors (upon request) to support color coded wire management schemes.

Bandoliers of 50 or reels of 5000 cable ties are available, enabling maximum user efficiency in hand-held, bench-mount, or automated processes.

Cable Tie for AT2000, 18lb Tensile Strength, PA66V0, White, 50/bandolier, 500/pkg

Article Number 120-04401

Type T18RA50

Color White (WH)

Quantity Per bag

Product Description HellermannTyton's AT2000 is designed to use 18 lb. cable ties and will fasten bundles up to 3/4" diameter. Engineered specifically for automatic cable tie assembly, these ties are offered in varying material compositions and colors, so manufacturers can select the ties that meet the application requirements and industry best practices.

Short Description	Cable Tie for AT2000, 18lb Tensile Strength, PA66V0, White, 50/bandolier, 500/pkg
Global Part Name	T18RA50-PA66V0-WH
Minimum Tensile Strength (Imperial)	18.0
Minimum Tensile Strength (Metric)	80
Length L (Imperial)	4.0
Length L (Metric)	4.8
Variant	bandolier
Width W (Imperial)	0.1
Width W (Metric)	2.5
Bundle Diameter Min (Imperial)	0.03
Bundle Diameter Min (Metric)	0.7
Bundle Diameter Max (Imperial)	0.75
Bundle Diameter Max (Metric)	20.0
Thickness T (Imperial)	0.043
Thickness T (Metric)	1.1

Power supply unit	Electrical
Material	Polyamide 6.6 V0 (PA66V0)
Material Shortcut	PA66V0
Flammability	UL 94 V-0
Halogen Free	Yes
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	UL ANSI/UL 1565 UL ANSI/UL 62275
UL Recognized (US)	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)