



HOBO® U23-002A Data Logger

U23 Pro v2 External Temperature/Relative Humidity

A weatherproof data logger with an external temperature and relative humidity sensor on a 6-foot cable for fast sensor response and deployment in tight spaces. The user-replaceable relative humidity sensor provides superior durability in humid environments.

```
.cboxlframe img {  
width:100%;  
}
```




Key Advantages:

- Weatherproof housing for use in outdoor or condensing environments
- High accuracy
- Relative humidity sensor provides fast response and superior recovery from condensing conditions
- Small-diameter external sensor versions for measurements in tight spaces
- Optic USB interface for fast and reliable download

HOBO U23-002A Data Logger Specifications

Temperature Sensor	
Operation Range	U23-001A internal sensor: -40 to 70°C (-40 to 158°F) U23-002A external temperature sensor: -40 to 70°C (-40 to 158°F) U23-003 and U23-004 external sensors: -40 to 100°C (-40 to 212°F), with tip and cable immersion in fresh water up to 50°C (122°F) for one year
Accuracy	U23-001A and U23-002A: $\pm 0.25^{\circ}\text{C}$ from -40 to 0°C (± 0.45 from -40 to 32°F), $\pm 0.2^{\circ}\text{C}$ from 0 to 70°C (± 0.36 from 32 to 158°F) U23-003 and U23-004: $\pm 0.21^{\circ}\text{C}$ from 0° to 50°C ($\pm 0.38^{\circ}\text{F}$ from 32° to 122°F); see Plot A
Resolution	U23-001A and U23-002A: 0.04°C (0.072°F) U23-003 and U23-004: 0.02°C at 25°C (0.04°F at 77°F); see Plot A
Response Time (Typical to 90%)	U23-001A internal sensor: 10 minutes in air moving 1 m/sec U23-002A external temperature sensor: 3 minutes, 45 seconds in air moving 1 m/sec U23-003 and U23-004 external sensors: 3 minutes in air moving 1 m/sec; 30 seconds in stirred water
Drift	U23-001A and U23-002A: $<0.01^{\circ}\text{C}$ (0.018°F) per year U23-003 and U23-004: $<0.1^{\circ}\text{C}$ (0.18°F) per year
Relative Humidity Sensor (U23-001A, U23-002A only)	
Operation Range	0 to 100% RH, -40° to 70°C (-40° to 158°F) Exposure to conditions below -20°C (-4°F) or above 95% RH may temporarily increase the maximum RH sensor error by an additional 1%
Accuracy	$\pm 2.5\%$ from 10% to 90% RH typical to a maximum of $\pm 3.5\%$ including hysteresis at 25°C (77°F); below 10% and above 90% $\pm 5\%$ typical
Resolution	0.05%
Response Time (Typical to 90%)	U23-001A: 40 minutes in air moving 1 m/sec with protective cap U23-002A: 15 seconds in air moving 1 m/sec
Drift	$<1\%$ per year typical
Logger	
Operation Range	-40° to 70°C (-40° to 158°F)
Real-time Clock	± 1 minute per month 0° to 50°C (32° to 122°F)
Battery	1/2 AA, 3.6 Volt lithium, user-replaceable (HP-B)
Battery Life (Typical Use)	3 years with 1 minute or greater logging interval
Memory (Non-Volatile)	64K bytes memory (approx. 21,000 temperature and RH measurements)
Materials	All models: ASA styrene polymer housing and mounting clamp; polypropylene protective cap; Buna-N o-ring(s); U23-001A, U23-002A only: ASA styrene polymer RH sensor cap; modified hydrophobic polyethersulfone membrane
Cables	U23-001A: No cables U23-002A: One 184 cm (6 ft) PVC cable; sensor diameter 1 cm (0.38 in.) U23-003: Two 184 cm (6 ft) PVC cables; sensor diameter 0.5 cm (0.20 in.) U23-004: One 184 cm (6 ft) PVC cable; sensor diameter 0.5 cm (0.20 in.)
Environmental Rating	Electronics housing is NEMA 6P equivalent (tolerant of brief submergence); Units with RH sensors are NEMA 4 equivalent (splash-resistant)
Launch Modes	Immediate start; delayed start
Logging Interval	Fixed-rate or multiple logging intervals, with up to 8 user-defined logging intervals and durations; logging intervals from 1 second to 18 hours
Offload Modes	Offload while logging; stop and offload

Battery Indication	Battery voltage can be viewed in status screen and optionally logged in datafile. Low battery indication in datafile.
Weight	U23-001A: 57 g (1.5 oz); U23-002A: 118 g (3.1 oz); U23-003: 138 g (3.7 oz); U23-004: 102 g (2.7 oz)
Dimensions	Housing measures 10.2 3.8 cm (4.0 1.5 in.)
NIST Certificate	Temperature certificate available for additional charge
CE	The CE Marking identifies this product as complying with all relevant directives in the European Union (EU).

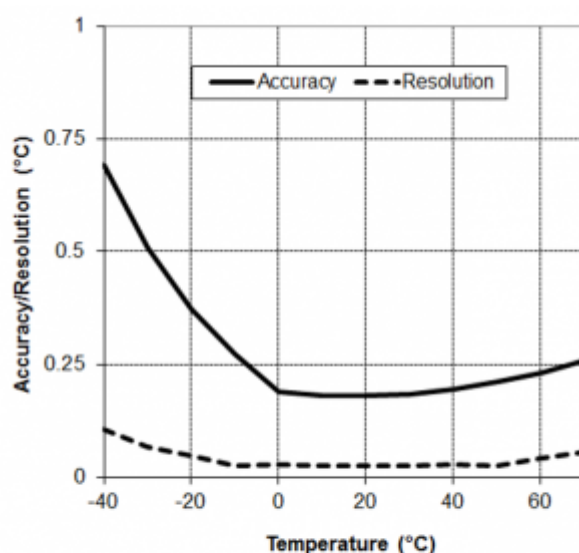

Plot A
(applies to U23-003 and
U23-004 models only)

Contact Us

Sales (8am to 5pm ET, Monday through Friday)

- ▶ Email sales@onsetcomp.com
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-800-564-4377
- ▶ Fax 1-508-759-9100

Technical Support (8am to 6pm ET, Monday through Friday)

- ▶ Contact Product Support www.onsetcomp.com/support/contact
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-877-564-4377

Onset Computer Corporation
470 MacArthur Boulevard
Bourne, MA 02532