


528 Gallon, Portable Hughes Self-Contained Safety Shower, Mobile, Immersion Heated, 100V GP - MHW2000-1

Product Images

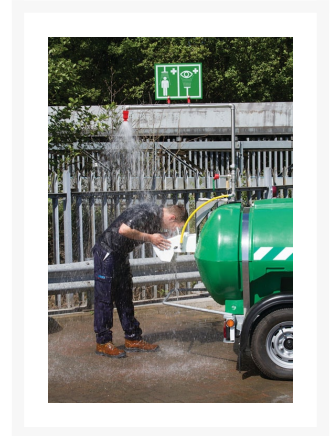

Short Description

HUGHES



Justrite Safety Group

- Mobile eye/face wash and shower provides a continuous flow of tepid water for over 15 minutes
- Covered bowl ensures that the nozzles and bowl remain clean and free from contamination
- High-performance quarter-turn ball valves made of 316L stainless steel endure the harshest environments and site conditions
- Integral immersion heater, controlled by a dual safety thermostat, maintains the water in the tank at a

constant temperature

- Meets ANSI Z358.1 2014 and EN 15154 standards, supports OSHA requirements

Description

Large capacity mobile shower with eye/face wash features a 528-gallon (2000-L) tank for reliable, effective treatment to accident victims in remote locations where a water supply is unavailable. Durable, chemical-resistant polyethylene tank incorporates an electric submersible pump.

Constructed from a durable, corrosion-resistant acrylic capped ABS, the eye/face wash incorporates an integral lid connected to the water valve for automatic operation—activate by simply pulling down the lid. Easy-to-reach flow regulator valve positioned on side of bowl adjusts to suit the severity of the accident. Includes heavy-duty galvanized trailer with toe hitch featuring four braked wheels with standard trailer-type pneumatic tires for easy movement between locations. Includes a universal safety shower and eyewash sign for enhanced visibility. Suitable for use in non-hazardous areas.

Electrical supply: 110V Single Phase, 60/50Hz

Specifications

Model No	MHW2000-1
Color	Green
UPC	805042000854
Brand	Justrite
Capacity	528 gallon
Liter Capacity	2000
Net Weight, lbs	1054
Net Weight, kg	478
Filled Weight, lbs	5423
Filled Weight, kg	2460
Dimensions, Exterior	117.2" H x 69.3" W x 169" D
Dimensions, Exterior	2976mm H x 1760mm W x 1760mm D
Height Without Sign, inches	67.3
Height Without Sign, mm	1711
Water Inlet Size NPT	18 in Hinged Lid
Water Flow Shower/Body Liters/min	76
Water Flow Shower/Body US Gal/min	20
Water Flow Eye/Face Liters/min	12
Water Flow Eye/Face US Gal/min	3
Operating Valve Material	Shower Valve: 316L Stainless, Eye Wash Valve: Chrome plated brass
Eye/Face Wash Bowl Material	Acrylic-Capped ABS Plastic
Mounting Type	Portable
Pipework Material	Stainless Steel
Activation Method	Shower: Hand lever, Eye/Face: Pull lid forward
Eye/Face Wash Bowl Interior Dimensions	9.5" W x 8" D

	241mm W x 203mm D
Minimum Ambient Temperature, °F	14
Minimum Ambient Temperature, °C	-10
Maximum Ambient Temperature, °F	100
Maximum Ambient Temperature, °C	40
Electrical Equipment Classification	General Purpose
Electrical Supply	110 VAC, Single Phase, 60/50 Hz
Heating Type	Immersion Heater
Heating Load, Watts	2200
Operation Duration, min	15

Prop 65

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.