

Connectors, Adapters, and Tools

| Model | Name | Use With: |
|-----------------|--|--|
| 213-CON | Analog Output Connector | Instruments with 12-pin analog connectors |
| 237-BAN-3A | Triax to Banana Plug | 4200-SCS, 7072, 7072-HV, DMMs |
| 237-BNC-TRX | 3-Lug Female Triax to Male BNC Connector with guard disconnected | 237, 4200-SCS, 6517A, 6517B, 7078-TRX cables |
| 237-TRX-BAR | 3-Lug Triax Female to Female Barrel Adapter | 2635A, 2636A, 4200-SCS, Triax interconnect |
| 237-TRX-NG | Triax Male-Female Adapter with guard disconnected | 237, 6517A, 6517B, 7072, 7072-HV |
| 237-TRX-T | 3-slot Male to Dual 3-Lug Female Triax Tee Adapter | 4200-SCS, 7072, 7072-HV, 7078-TRX cables |
| 237-TRX-TBC | 3-Lug Female Triax Bulkhead Connector | 7072, 7072-HV, 7078-TRX cables |
| 2182-325A | Silver Solder for use with 2182-KIT | 2182A |
| 2182-KIT | Low-Thermal Connector with Strain Relief (LEMO) | 2182A, SC-93 |
| 2188 | Low-Thermal Calibration Shorting Plug | 2182A |
| 2499-DIGIO | Digital I/O Expansion Module | SourceMeter instruments |
| 2500INT-SMA | SMA Connector | 2500INT integrating sphere |
| 2500INT-FC/PC | FP/PC Connector | 2500INT integrating sphere |
| 2500INT-FC/APC | FP/APC Connector | 2500INT integrating sphere |
| 2600-KIT | Screw Terminal Connector with Strain Relief and Cover | 2601A, 2602A (2 needed), 2611A, 2612A (2 needed) |
| 2600-TRIAX | 3-Lug Triax Adapter | 2601A, 2602A (2 needed), 2611A, 2612A (2 needed) |
| 3706-BKPL | Analog Backplane Extender Board | Series 3700, Series 3700A |
| 3720-ST | Screw Terminal Block | 3720 |
| 3721-ST | Screw Terminal Block | 3721 |
| 3723-ST | Screw Terminal Block | 3723 |
| 3723-ST-1 | Screw Terminal Block | 3723 |
| 3724-ST | Screw Terminal Block | 3724 |
| 3730-ST | Screw Terminal Block | 3730 |
| 3731-ST | Screw Terminal Block | 3731 |
| 3740-ST | Screw Terminal Block | 3740 |
| 3750-ST | Screw Terminal Block | 3750 |
| 3790-KIT50-R | 50-pin Female D-sub Connector Kit | 3721, 3730, 3731, 3740, 3750 |
| 3791-CIT | Contact Insertion and Extraction Tool | 3720, 3722, 3723 |
| 3791-KIT78-R | 78-pin Female D-sub Connector Kit | 3720, 3723, 3724, 3732 |
| 3792-KIT104-R | 104-pin Male D-sub Connector Kit | 3722 |
| 3792-KIT104-R/F | 104-pin Female D-sub Connector Kit | 3722 |
| 4851 | BNC Shorting Plug | Instruments with BNC connectors |
| 6171 | 3-slot Male to 2-Lug Female Triax Adapter | 2-lug triax connectors |
| 6172 | 2-slot Male to 3-Lug Female Triax Adapter | 7065, 2500INT |
| 7001-PNL | Metal Plate | 7001 |
| 7011-KIT-R | Female 96-pin Connector Kit | 7011-C, 7012-C, 7013-C, 7015-C, 7018-C |
| 7011-ST | Extra Screw Terminal Board | 7011-S |
| 7012-ST | Extra Screw Terminal Board | 7012-S |
| 7013-ST | Extra Screw Terminal Board | 7013-S |

| Model | Name | Use With: |
|--------------|---|---|
| 7014-ST | Extra Screw Terminal Board | 7014 |
| 7015-ST | Extra Screw Terminal Board | 7015-S |
| 7018-ST | Extra Screw Terminal Board | 7018-S |
| 7072-TRT | Triax Removal Tool | 707B, 708B |
| 7074-CIT | Contact Extraction Tool | 7152-KIT, 7152-MTR |
| 7074-HCT | Hand Crimping Tool | 7152-KIT, 7152-MTR |
| 7078-CIT | Contact Insertion/Extraction Tool | 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR |
| 7078-HCT | Hand Crimping Tool for 7078-KIT, 7169-KIT | 7078-KIT |
| 7078-KIT | Connector Kit | 7071, 7071-4, 7074-D, 7078-MTR |
| 7078-MTR | Mass Terminated Receptacle, Bulkhead Mount | 7071, 7071-4, 7078-KIT, 7078-MTC |
| 7078-TRX-BNC | 3-slot Male Triax to BNC Adapter | 486, 487, 4210-CVU, 4801, 6514, 6517A, 6517B, 7072, 7072-HV |
| 7078-TRX-GND | 3-slot Male Triax to BNC Adapter (guard removed) | 237, 4200-SCS, 4801, 6517A, 6517B, 7051, 7072, 7072-HV, Series 2600A |
| 7078-TRX-TBC | 3-Lug Female Triax Bulkhead Connector w/Cap | 7078-TRX cables |
| 7152-HCT | Hand Crimp Tool for 7152-KIT, 7152-MTR | 7152-KIT, 7152-MTR |
| 7152-KIT | 6-Position M-Series Plug w/Contacts | 7152, 7152-MTR |
| 7152-MTR | 6-Position M-Series Receptacle w/Socket | 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10 |
| 7703-306A | DB50 Male Connector Kit | 7701, 7703, 7705, 7709 |
| 7709-308A | DB25 Male Connector Kit | 7701, 7707, 7709, Series 2600A |
| 7712-SMA-N | Female SMA to Male N-Type Adapter | 7711, 7712 |
| 7755 | 50Ω Feed-Through Terminator | RG 58 cable, 776, 3390 |
| 7788 | 50-pin D Subconnector Kit | 7703, 7705, 77XX, modules with D sub connectors |
| 7789 | 50-pin Male and 25-pin Male D-Shell Connector Kit | 7701, 7709 |
| 7790 | 50-pin Male, 50-pin Female, and 25-pin Male IDC D-Shell Connector Kit | 7701, 7703, 7705, 7707, 7709 |
| 8610 | Low Thermal Shorting Plug | 2000, 2001, 2002, 2010 |
| 8620 | 4-Wire DMM Shorting Plug | 2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700, Series 3700A |
| 8680 | RTD Probe Adapter | 2001, 2002, 2010 |
| BG-18 | Dual Banana to BNC Coaxial Adapter | 230, Series 2000, Series 2400, 2700, 2750 |
| CAP-18 | Protective Shield/Cap | BNC, 2-lug triax connectors |
| CAP-31 | Protective Shield/Cap | 3-lug triax connectors |
| CS-400 | DB25 Male Solder Cup | CA-126-1 cable, 213 |
| CS-458 | Interlock Connector Kit | 6517-ILC-3 |
| CS-565 | BNC Barrel, 4200-SCS | BNC interconnect |
| CS-630 | 3-Lug Female Triax Bulkhead Connector | 6487, 6517A, 6517B |
| CS-631 | 3-Lug Male Triax Cable Mount Connector | 4200-SCS, SC-22 cable |
| CS-701 | BNC Tee Adapter (Female-Male-Female) | 4200-SCS |
| CS-719 | 3-Lug Triax Jack Receptacle | 4200-SCS |

1.888.KEITHLEY (U.S. only)

www.keithley.com


KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools


| Model | Name | Use With: |
|---------|---|---------------------|
| CS-846 | Screw Terminal Test Lead Connector | 230X, 2510, 2510-AT |
| CS-970 | High Voltage Bulkhead Connector | 248, 248-SHV cable |
| CS-1247 | SMA Female to BNC Male Adapter | 4200-SCS |
| CS-1249 | SMA Female to SMB Plug Adapter | 4200-SCS |
| CS-1251 | BNC Female to SMB Plug Adapter | 4200-SCS |
| CS-1252 | SMA Male to BNC Female Adapter | 4200-SCS |
| CS-1281 | SMA Female to SMA Female Adapter | 4200-SCS |
| CS-1305 | Interlock Connector | 6517B |
| CS-1382 | Female MMBX Jack to Male SMA Plug Adapter | 4200-SCS |

| Model | Name | Use With: |
|------------|---------------------------------------|---------------------------------|
| CS-1390 | Male LEMO Triax to Female SMA Adapter | 4200-SCS |
| CS-1391 | SMA Tee Adapter (Female-Male-Female) | 4200-SCS |
| CS-1423-3 | Miniature Mating Connector | 2635A, 2636A |
| CS-1479 | SMA Male to BNC Male Adapter | 4200-SCS |
| CS-1592-2 | Screw Terminal Plug | 2651A |
| CS-1626-2 | Screw Terminal Receptacle | 2651A |
| CS-1629-8 | Screw Terminal Connector | 2651A |
| CS-1638-12 | Rear Panel Mounting Connector | Series 2200 |
| TL-24 | SMA Torque Wrench | 4200-SCS, System 46, System 46T |

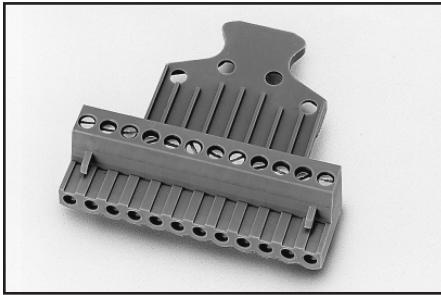

Model 213-CON Analog Output Connector: Quick disconnect analog output connector for Model 213 Quad Voltage Source. Screw terminals provided for connection of test leads.

For use with: Instruments with 12-pin analog connectors

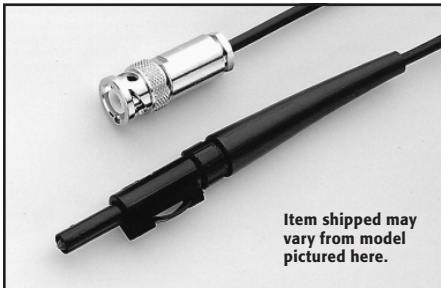

Model 237-BAN-3A Triax to Banana Plug: Triax cable center conductor terminated in a safety banana plug (guard and shield open). For connecting DMMs and other banana jack instruments to a matrix or fixture.

For use with: 4200-SCS, 7072, 7072-HV, DMMs



Model 237-BNC-TRX: Male BNC to 3-lug female triax adapter (guard disconnected). Terminates triax cable in BNC plug. High voltage rating for use with 237 and 7072-HV.

For use with: 237, 4200-SCS, 6517A, 6517B, 7078-TRX cables



Model 237-TRX-BAR: 3-lug triax barrel (female to female) for use with triax interconnect.

For use with: 2635A, 2636A, 4200-SCS, triax interconnect



Model 237-TRX-NG: 3-slot triax to 3-lug female triax adapter (guard removed) for non-guarded measurements. High voltage rating for use with 237, 7072-HV, etc.

For use with: 237, 6517A, 6517B, 7072, 7072-HV



Model 237-TRX-T: 3-slot male to dual 3-lug female triax tee adapter for use with 7078-TRX cables and 7072/7072-HV Semiconductor Matrix Cards. High voltage rating for use with Models 237 SMU and 6517B Electrometer.

For use with: 237, 4200-SCS, 6517A, 6517B, 7072, 7072-HV, 7078-TRX cables

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools




Model 237-TRX-TBC: 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections. High voltage rating for use with 237, 7072-HV, etc. Uses miniature coax cable, not triax cable, at soldered end. Bulkhead is outer shield.

For use with: 7072, 7072-HV, 7078-TRX cables


Model 2182-325A: Silver solder for making connections in experiments with the Model 2182A. 20 ft roll.

For use with: 2182A

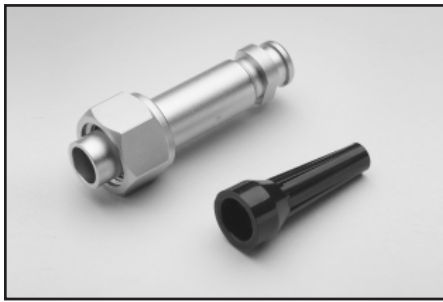

Model 2182-KIT Low-Thermal Connector with Strain Relief: Connector kit for building a custom input cable for the Model 2182A Nanovoltmeter. Includes a low-thermal (LEMO) connector and a strain relief.

For use with: 2182A, SC-93

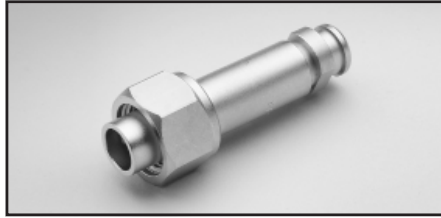

Model 2188 Low-Thermal Calibration Shorting Plug: A low-resistance, low-thermal shorting plug required to calibrate the Model 2182A Nanovoltmeter. Made of a LEMO connector with its pin connectors shorted together using copper wire and Sn/Ag4 silver solder.

For use with: 2182A



Model 2499-DIGIO: Digital I/O expansion module that plugs onto the DB-9 connector of a SourceMeter® instrument. Expands the three digital I/O lines of the SourceMeter to 16 lines. The SOT, EOT/BUSY, 5V, GND, and Interlock signals are passed through.

Services Available: 1-year factory warranty extended to 3 years from date of shipment

For use with: SourceMeter Instruments

Model 2500INT-FC/APC: FC/APC connector for 2500-INT Integrating Sphere.

For use with: 2500-INT




Model 2500INT-FC/PC: FC/PC connector for 2500-INT Integrating Sphere.

For use with: 2500-INT




Model 2500INT-SMA: SMA connector for 2500-INT Integrating Sphere.

For use with: 2500-INT

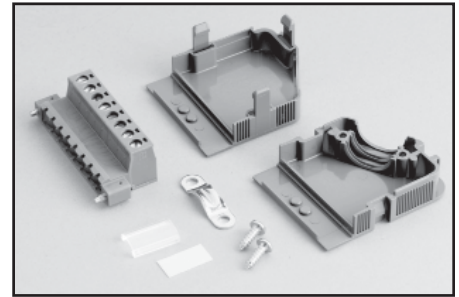

Model 2600-KIT: Extra screw terminal connector, strain relief, and cover for a single SourceMeter channel (two needed for use with Models 2602A and 2612A).

For use with: 2601A, 2602A, 2611A, 2612A

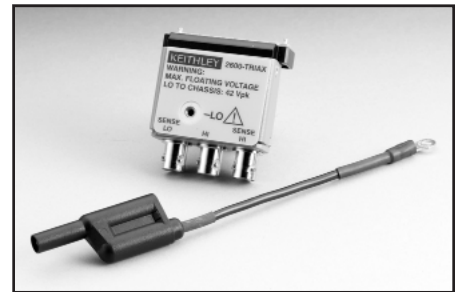

Model 2600-TRIAX: Triax adapter for a single Series 2600A SourceMeter channel (two needed for use with Models 2602A and 2612A). For use with standard 3-lug triax cables.

For use with: 2601A, 2602A, 2611A, 2612A

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY


A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools




Model 3706-BKPL: Analog backplane extender board, 15-pin D-sub to terminal block.

For use with: Series 3700, Series 3700A

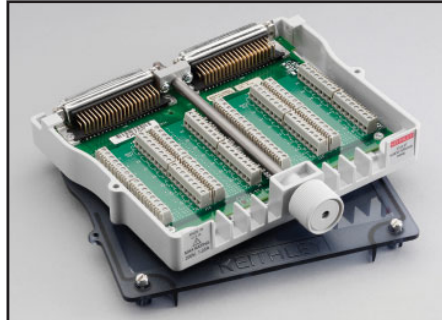


Model 3723-ST: Screw Terminal Block. Accessory for Model 3723 for two-pole applications.

For use with: 3723

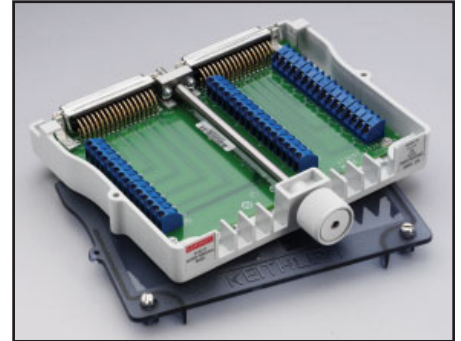


Model 3730-ST: Screw Terminal Block.

For use with: 3730

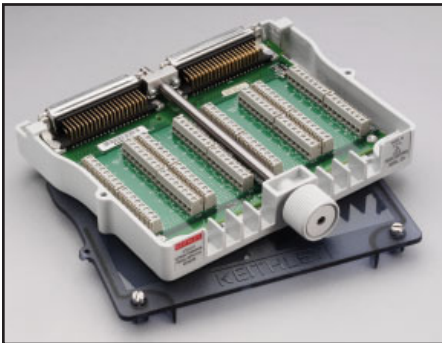


Model 3720-ST: Screw Terminal Block. Required with the Model 3720 for automatic CJC thermocouple measurements.

For use with: 3720

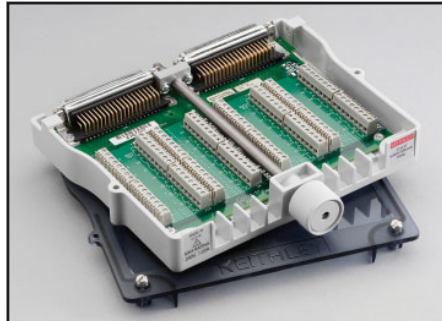


Model 3723-ST-1: Screw Terminal Block. Accessory for the Model 3723 for single-pole applications.

For use with: 3723

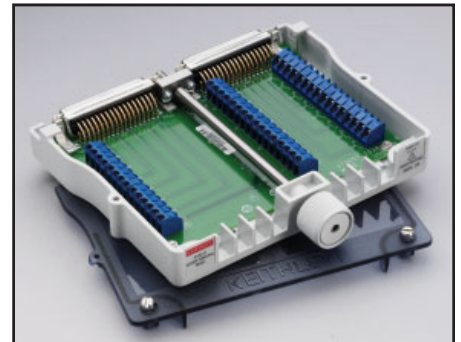


Model 3731-ST: Screw Terminal Block.

For use with: 3731

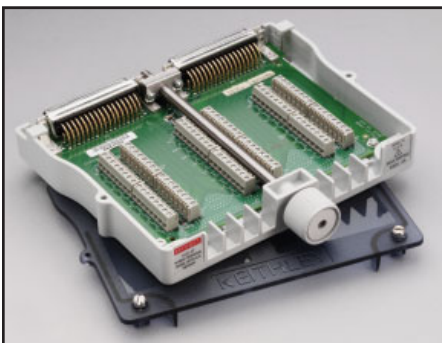


Model 3721-ST: Screw Terminal Block. Required with the Model 3721 for automatic CJC thermocouple measurements.

For use with: 3721

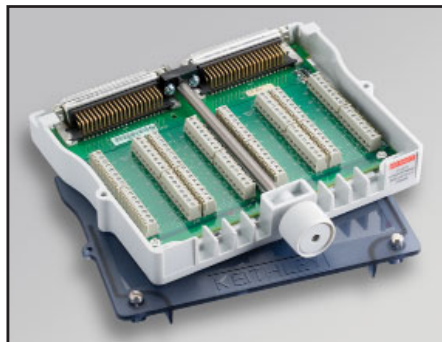

Model 3724-ST: Screw Terminal Block.

For use with: 3724

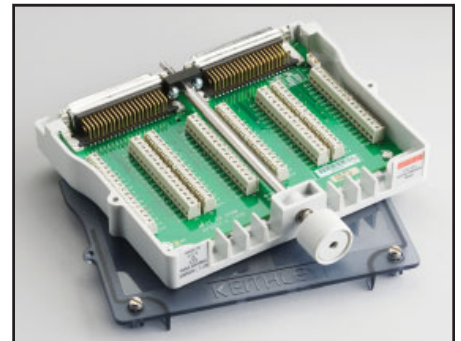

Model 3732-ST-C: Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: quad 4x28 (1W), dual 4x28 (2W), single 4x56 (2W), dual 4x56 (1W), and single 4x112 (1W).

For use with: 3732

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY


A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools




Model 3732-ST-R: Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: dual 8×28 (1W), single 8×28 (2W), and single 16×28 (1W).

For use with: 3732

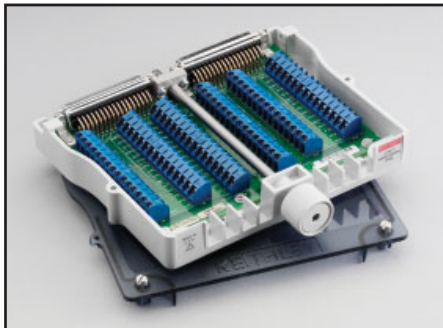

Model 3740-ST: Screw Terminal Block.

For use with: 3740

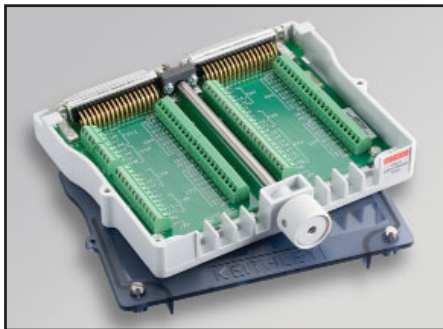


Model 3750-ST: Screw Terminal Block.

For use with: 3750



Model 3790-KIT50-R: 50-pin female D-sub connector kit that contains two female D-sub connectors with housings and 100 solder cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

For use with: 3721, 3730, 3731, 3740, 3750

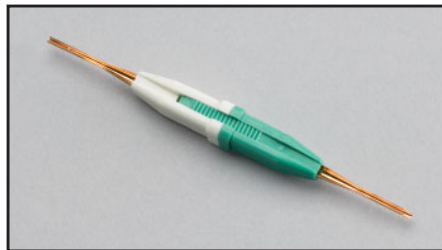

Model 3791-CIT: Contact insertion and extraction tool for assembly and maintenance of Series 3700A D-sub Connector kits.

For use with: 3791-KIT78-R, 3791-KIT104-R



Model 3791-KIT78-R: 78-pin female D-sub connector kit that contains two female D-sub connectors and 156 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

For use with: 3720, 3723, 3724, 3732



Model 3792-KIT104-R: 104-pin male D-sub connector kit that contains two male D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

For use with: 3722



Model 3792-KIT104-R/F: 104-pin female D-sub connector kit that contains two female D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cables, harnesses, and DUT interface compatible with Series 3700A plug-in cards.

For use with: 3722



Model 4851: BNC shorting plug.

For use with instruments with BNC connectors

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools




Model 6171: 3-slot male to 2-lug female triax adapter.

For use with: 2-lug triax connectors



Model 6172: 2-slot male to 3-lug female triax adapter. For use in adapting Models 7065 and 250INT inputs to 3-slot triax plugs.

For use with: 7065, 250INT

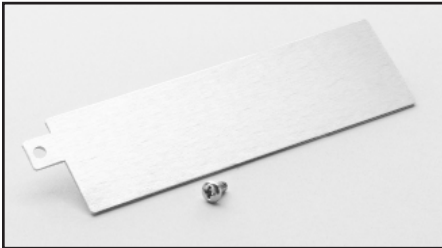


Model 7001-PNL: Metal plate used to cover an empty card slot on the rear panel of a Model 7001.

For use with: 7001




Model 7011-KIT-R: 96-pin female DIN connector with solder eyelets and strain relief. This kit can be used for assembly of custom cables to connect with the connectors on the 7011-C, 7012-C, 7013-C, 7015-C, and 7018-C switch cards. Also connects with the 7011-MTR bulk-head mount male connector.

For use with: 7011-C, 7012-C, 7013-C, 7015-C, 7018-C

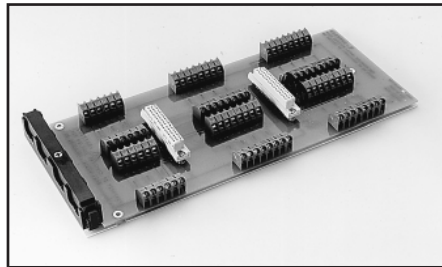


Model 7011-ST: Extra quick disconnect screw terminal board. One 7011-ST is included with each 7011-S.

For use with: 7011-S

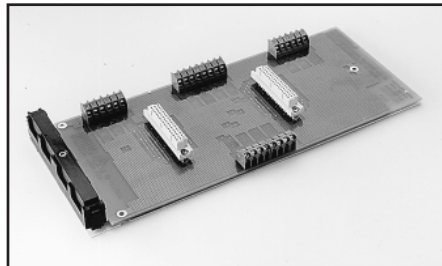


Model 7012-ST: Extra quick disconnect screw terminal board. One 7012-ST is included with each 7012-S.

For use with: 7012-S

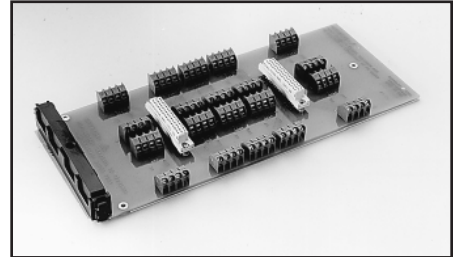


Model 7013-ST: Extra quick disconnect screw terminal board. One 7013-ST is included with each 7013-S.

For use with: 7013-S

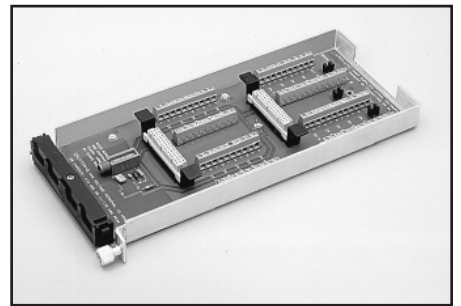

Model 7014-ST: Extra quick disconnect isothermal screw terminal board with cold junction sensor. One 7014-ST is included with each 7014.


For use with: 7014

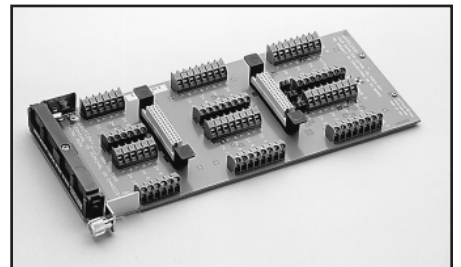

Model 7015-ST: Extra quick disconnect screw terminal board. One 7015-ST is included with each 7015-S.


For use with: 7015-S

Connectors, Adapters, and Tools

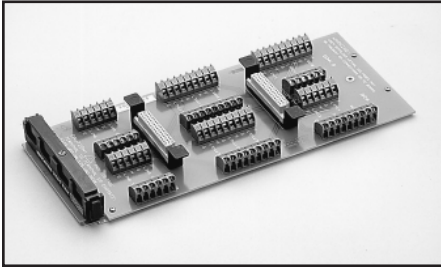


Model 7018-ST: Extra quick disconnect screw terminal board. One 7018-ST is included with each 7018-S.

For use with: 7018-S

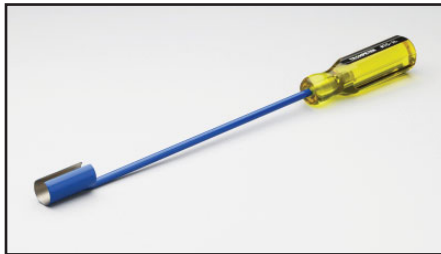

Model 7072-TRT: Triax removal tool used to connect or disconnect triax style connectors when clearance is limited making it difficult to mate or unmate a connector with your fingers.

For use with: 707B, 708B

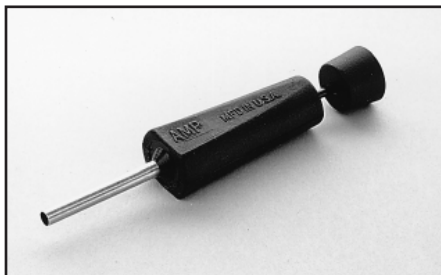

Model 7074-CIT: Contact extraction tool for removal of contacts from cables and connectors.

For use with: 7152-KIT, 7152-MTR



Model 7074-HCT: Contact crimping pliers for assembly of cables and connectors.

For use with: 7152-KIT, 7152-MTR




Model 7078-CIT: Contact insertion and extraction tool for assembly and maintenance of 7078-MTC cables and connectors.

For use with: 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR




Model 7078-HCT: Contact crimping pliers for assembly of cables and connectors using 7078-MTR or 7078-KIT.

For use with: 7078-KIT

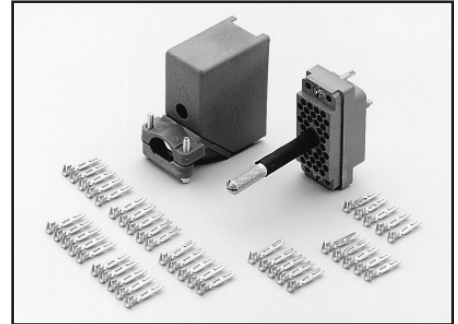

Model 7078-KIT: 38-pin male plug assembly with strain relief and 40 contacts for assembly of custom cable and harnesses compatible with Model 7071 8x12 Matrix Card, Model 7071-4 Dual 4x12 Matrix Card, and 7078-MTR Mass Terminated Receptacle. Requires 7078-HCT; recommend 7078-CIT.

For use with: 7071, 7071-4, 7074-D, 7078-MTR

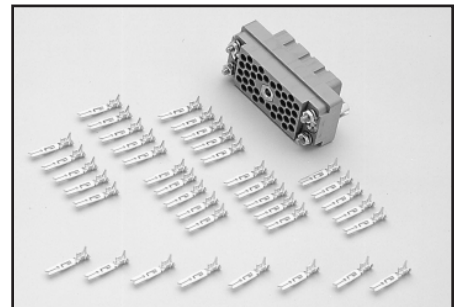

Model 7078-MTR: 38-pin female bulkhead mount receptacle with 40 contacts for custom interface and patch panels compatible with 7078-MTC and 7078-KIT. Requires 7078-HCT; recommend 7078-CIT.

For use with: 7078-KIT, 7078-MTC, 7071, 7071-4



Model 7078-TRX-BNC: 3-slot male triax to BNC adapter for use with 7072 Semiconductor Matrix Card and 4801 cables.

For use with: 486, 487, 4210-CVU, 4687, 4801, 6514, 6517A, 6517B, 7072, 7072-HV

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools



Model 7078-TRX-GND: 3-slot male triax to female BNC adapter (guard removed) for adapting non-guarded measurements to the Model 237 SMU, 7072, or 7072-HV Semiconductor Matrix Cards, or 8006 or 8008 Test Fixtures.

For use with: 237, Series 2600A, 4801, 6517A, 6517B, 7051, 7072, 7072-HV




Model 7078-TRX-TBC: 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections.

For use with: 7078-TRX Cables



Model 7152-HCT: Contact crimping pliers for assembly of cables and connector using 7152-MTR or 7152-KIT.

For use with: 7152-KIT, 7152-MTR

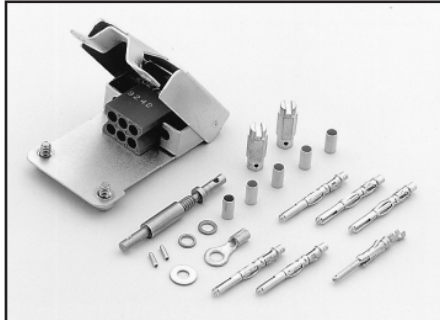

Model 7152-KIT: 6-pin plug assembly with strain relief and contacts for assembly of custom cable and harnesses compatible with Model 7152 4x5 Low Current Matrix Card and 7152-MTR Mass Terminated Receptacle. Requires 7152-HCT recommend 7074-CIT and 7074-HCT.

For use with: 7152, 7152-MTR



Model 7152-MTR: 6-pin bulkhead mount receptacle with contacts for custom interface and patch panels compatible with 7152-MTC and 7152-KIT. Requires 7152 HCT; recommend 7074-CIT and 7074-HCT.

For use with: 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10



Model 7703-306A: DB50 male connector kit (solder cup) with shell.

For use with: 7701, 7703, 7705, 7709



Model 7709-308A: DB25 male connector kit (solder cup) with shell.

For use with: 7701, 7707, 7709, Series 2600A



Model 7712-SMA-N: Female SMA to male N-type adapter.

For use with: 7711, 7712

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools



Model 7755 50Ω Feed-Through Terminator: BNC-to-BNC adapter for terminating RG58 cable in its characteristic impedance. VSWR <1.1, DC–250MHz.

For use with: RG58 Cable, 776, 3390



Model 7788: 50-pin D subminiature connector kit. To mate with 50-pin connector on Model 7703 and 7705.

For use with: 7703, 7705, 77xx modules with D-sub connectors



Model 7789: 50-pin/25-pin (both male) D-Shell Kit (one of each) for 7701 or 7709 Integra modules (mating connectors are supplied with these modules when purchased).

For use with: 7701, 7709




Model 7790: 50 pin male, 50 pin female, 25 pin male IDC D-Shell Connector Kit (one each).

For use with: 7701, 7703, 7705, 7707, or 7709 Integra modules



Model 8610 Low Thermal Shorting Plug: For calibration lab use, this plug provides a very low thermal offset short at front or rear inputs.

For use with: 2000, 2001, 2002, 2010

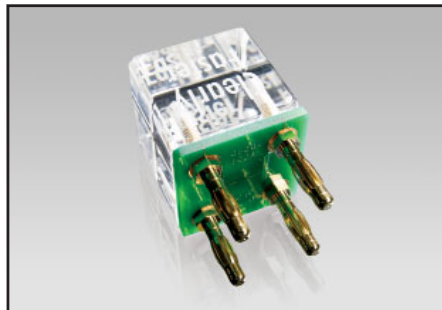

Model 8620 Four-Wire DMM Shorting Plug: Provides a low resistance 4-wire short to both observe and cancel DMM offset resistances and voltages to improve measurement accuracies.

For use with: 2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700, Series 3700A



Model 8680 RTD Probe Adapter: Provides a means of connecting RTD probes terminated in either a 4-wire instrumentation connector or bare wires to safety input jacks on a 0.5 inch spacing. Use with Models 8681, 8693, 8695, or 8696.

For use with: 2001, 2002, 2010



BG-18: Dual banana to BNC coaxial adapter for adapting connection on instrument with dual banana jack.

For use with: 230, Series 2000, Series 2400, 2700, 2750



CAP-18: Protective shield/cap for BNC connectors.

For use with: BNC connectors



CAP-31: Protective shield/cap for 3-lug triax connectors.

For use with: 3-lug triax connectors


1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools

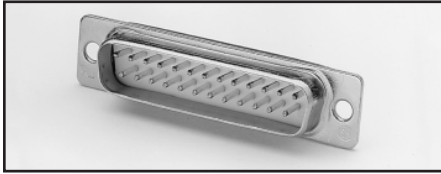

CS-400: DB25 male solder cup.
For use with: C126-1 cable, 213



CS-458: Interlock connector kit to mate with 6517-ILC-3.
For use with: 6517-ILC-3



CS-565: Female BNC to female BNC adapter with 50Ω nominal impedance.
For use with: 4200-SCS, BNC interconnect



CS-630: 3-lug female triax bulkhead connector for soldered connection. Mates with CS-631.
For use with: Fixtures, 6487, 6517A, 6517B



CS-631: 3-slot male triax cable mount connector for use with SC-22 cable. Mates to Models 237, 486, 487, 7072, and 8006.
For use with: 4200-SCS, SC-22 cable



CS-701: BNC tee adapter (female, male, female).
For use with: 4200-SCS



CS-719: 3-lug triax jack receptacle.
For use with: 4200-SCS



CS-846: Eight position connector with screw terminals for connection to test leads.
For use with: 230x, 2510, 2510-AT



CS-970: High voltage bulkhead connector.
For use with: 248, 248-SHV cable



CS-1247: SMA female to BNC male adapter
For use with: 4200-SCS



CS-1249: SMA female to SMB plug adapter
For use with: 4200-SCS



CS-1251: BNC female to SMB plug adapter
For use with: 4200-SCS



CS-1252: SMA male to BNC female adapter
For use with: 4200-SCS



CS-1281: SMA female to SMA female adapter
For use with: 4200-SCS


1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY


A GREATER MEASURE OF CONFIDENCE

Connectors, Adapters, and Tools

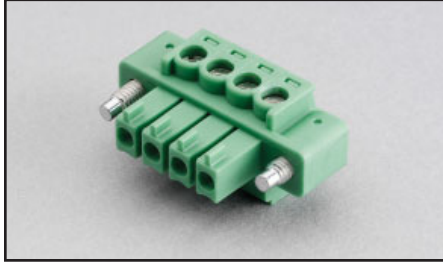


CS-1305: Interlock connector to mate with Model 6517B.

For use with: 6517B

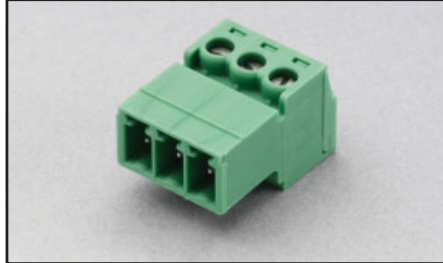

CS-1423-3: Miniature mating connector used as a ground connector for the Models 2635A and 2636A.

For use with: 2635A, 2636A

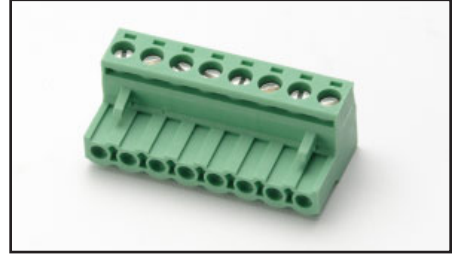

CS-1629-8: 8-pin female cable termination block.

For use with: 2651A



CS-1382: Female MMBX jack to male SMA plug adapter with 50Ω impedance and 6GHz maximum frequency

For use with: 4200-SCS



CS-1479: SMA male to BNC male adapter.

For use with: 4200-SCS



CS-1638-12: 12-pin rear panel output connector.

For use with: Series 2200



CS-1390: Male LEMO triax to female SMA adapter

For use with: 4200-SCS



CS-1592-2: 2-pin male screw terminal connector plug. Rated 50A. Mates with the Model CS-1626-2 screw terminal block.

For use with: 2651A




TL-24: SMA torque wrench

For use with: 4200-SCS, System 46, System 46T



CS-1391: SMA tee adapter (female-male-female)

For use with: 4200-SCS

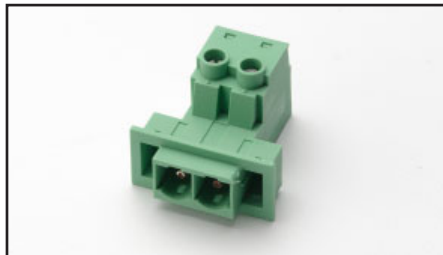

CS-1626-2: 2-pin female screw terminal connector block. Rated 50A. Mates with Model CS-1592-2 screw terminal connector.

For use with: 2651A

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A GREATER MEASURE OF CONFIDENCE