


Keysight 8494G/H, 8495G/H, 8496G/H Programmable Step Attenuators

Data Sheet



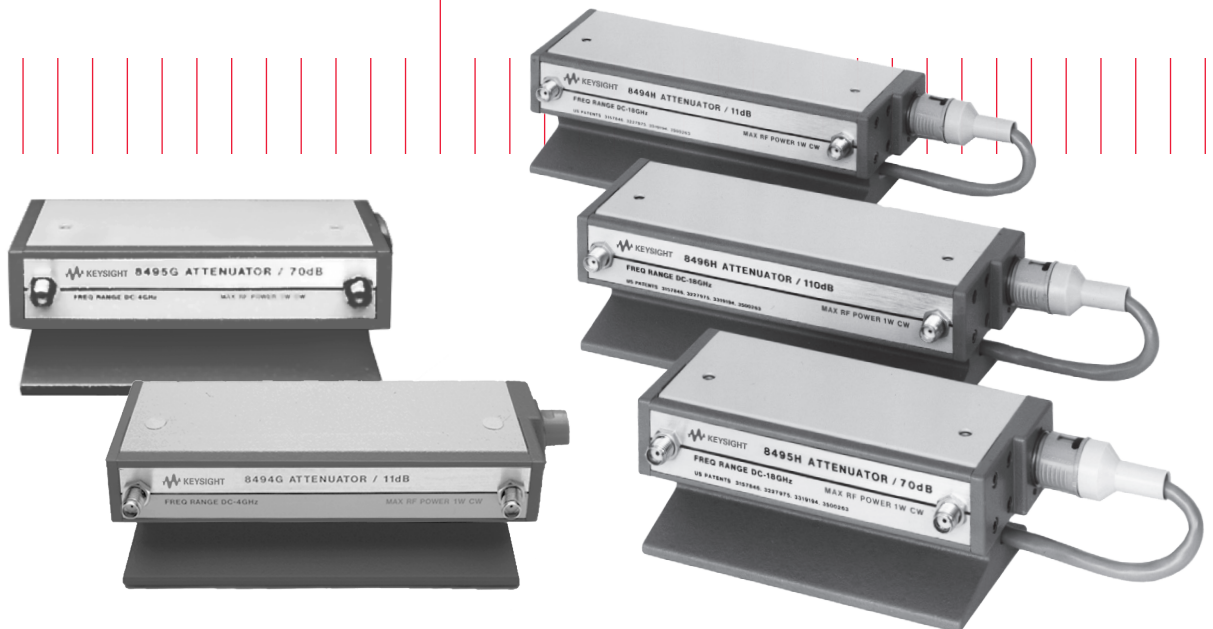

Introduction

Features

- Achieve high reliability and exceptional repeatability reducing downtime
- Excellent RF specifications optimize test system measurement capability
- Broad portfolio of attenuation and connector options provide configuration flexibility

Specifications describe the instrument's warranted performance. Supplemental and typical characteristics are intended to provide information useful in applying the instrument by giving typical, but not warranted performance parameters.

Specifications

Model number	Frequency	Attenuation range (dB)	Attenuation step	Insertion loss (dB) @ 0 dB	Maximum SWR	Max. input average power	Max. input peak power	Operating life (in million cycles/section)	Repeatability
8494G	DC to 4 GHz	0 to 11	1 dB	0.96	1.50	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8495G	DC to 4 GHz	0 to 70	10 dB	0.68	1.35	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8496G	DC to 4 GHz	0 to 110	10 dB	0.96	1.50	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8494H	DC to 18 GHz	0 to 11	1 dB	2.22	1.90	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8495H	DC to 18 GHz	0 to 70	10 dB	1.66	1.70	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8496H	DC to 18 GHz	0 to 110	10 dB	2.22	1.90	1 W	100 W	5	±0.03 dB max 5 million cycles per section

RF Connector Options: 1) 849xG/H offers N(f)/SMA (f)/APC-7

Supplemental Specifications

Attenuation Accuracy: +/- dB (Reference from 0 dB)



8494G/H 8495G/H 8496G/H	8494G	8494H	8495G	8495H	8496G	8496H
Attenuation Selection (dB)	DC to 4 GHz	DC to 12.4 GHz	12.4 to 18 GHz	DC to 4 GHz	DC to 12.4 GHz	12.4 to 18 GHz
1	10	0.2	0.3	0.7	0.2	0.5
2	20	0.2	0.3	0.7	0.4	0.7
3	30	0.3	0.4	0.7	0.5	0.9
4	40	0.3	0.4	0.7	0.7	1.2
5	50	0.3	0.5	0.7	0.8	1.5
6	60	0.3	0.5	0.8	1.0	1.8
7	70	0.4	0.6	0.8	1.2	2.1
8	80	0.4	0.6	0.8	-	-
9	90	0.4	0.6	0.8	-	-
10	100	0.4	0.6	0.9	-	-
11	110	0.5	0.7	0.9	-	-

How To Drive

Section Solenoid Coil	Section 1		Section 2		Section 3		Section 4		Power V+	
	Thru-line	Atten Card	Thru-line	Atten Card	Thru-line	Atten Card	Thru-line	Atten Card		
Option 060	Bare Wire Cable Color Code ¹	PUR	YEL	BLK	GRN	ORN	BLU	BRN	WHT	RED
	Connector Plug Pin Number	5	6	7	8	9	10	11	12	1
Option 016	Flat Pack Plug Pin Number ²	13	2	11	5	3	9	4	10	6
	Pin Number on the attenuator	1	2	5	8	4	9	6	7	10
8494G/H		0 dB	1 dB	0 dB	2 dB	0 dB	4 dB	0 dB	4 dB	-
8495G/H		0 dB	10 dB	0 dB	20 dB	0 dB	40 dB	-	-	-
8496G/H		0 dB	10 dB	0 dB	20 dB	0 dB	40 dB	0 dB	40 dB	-

¹ Five-foot cable and mating plug assembly provided.

² Pin 6 is common for all coils. Pin 1, 7, 8, 12 and 14 are not used.

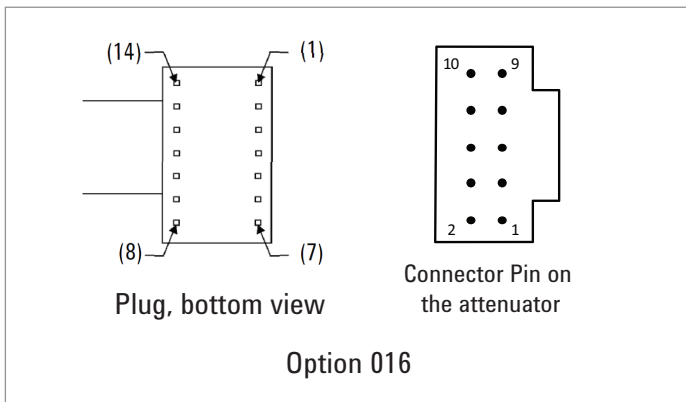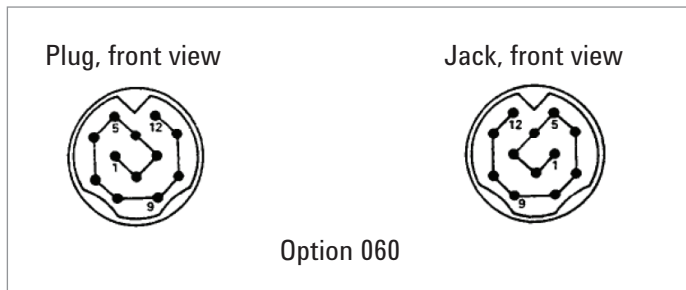

Ordering Information

Attenuation range	Option type	Option description
	001	N (f)
	002	SMA (f)
	003	APC-7
8494G/ 8494H/ 8495G/ 8495H/ 8496G/ 8496H/	024	24 Vdc
	011	5 Vdc
	060	12-pin Viking connector
	016	16-inch ribbon cable with 14-pin DAP plug
	UK6	Commercial calibration test data with certifications

Note: Option 003 is not available for 8495G

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mta

www.keysight.com/find/attenuators

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

