

Keysight E36200 Series DC Power Supplies

Designed for Your Power-Hungry Devices

The E36200 series single and dual output power and are intended for your bench applications that require power up to 400W. Autoranging technology provides the highest current available at all output voltage. Power devices with up to 40 A (E36233A) or voltage up to 120 V (E36234A) using auto-parallel or auto-series to internally connect the two outputs into a single output with twice the power. A single output supply can power devices requiring up to 200 W. A dual supply provides two independent 200 W channels.



Option	Description
E363GPBU	Standalone GPIB interface module
UK6	Commercial calibration with test result data
SEC	NISPOM and file security

Performance Specifications	E36231A	E36232A	E36233A		E36234A	
Power output	200 W	200 W	400 W		400 W	
Channel	1	1	1	2	1	2
DC output rating (0 to 40 °C)	0 to 30 V	0 to 60 V	0 to 30 V	0 to 30 V	0 to 60 V	0 to 60 V
	0 to 20 A	0 to 10 A	0 to 20 A	0 to 20 A	0 to 10 A	0 to 10 A
Output ripple and noise (20 Hz to 20 MHz)						
Normal mode voltage, Vpp	< 4.5 mVpp	< 3.5 mVpp	< 4.5 mVpp		< 3.5 mVpp	
Output ripple and noise (20 Hz to 10 MHz)						
Normal mode voltage, Vrms	< 350 uVrms					
Accuracy 12 months (23 °C ± 5 °C)						
Programming accuracy ± (% of output + offset)						
Voltage	0.03% +4 mV	0.03% +8 mV	0.03% +4 mV		0.03% +8 mV	
Current	0.1% +6 mA	0.1% +3 mA	0.1% +6 mA		0.1% +3 mA	
Low range current ¹	0.25% +160 uA	0.25% +80 uA	0.25% +160 uA		0.25% +80 uA	
Typical Characteristic						
Command processing time	< 10ms					
Up/down programming settling time to within 1% of total excursion						
Up full load	50 msec					
Up no load	50 msec					
Down full load	30 msec					
Down no load	100 msec					
Features						
Low range current	Yes	Yes	Yes		Yes	
Data logging	Yes	Yes	Yes		Yes	
Voltage slew rate	Yes	Yes	Yes		Yes	
Output LIST	Yes	Yes	Yes		Yes	
Digital I/O port	Yes	Yes	Yes		Yes	
Remote sensing	Yes	Yes	Yes		Yes	
Outputs at front and rear	Yes	Yes	Yes		Yes	
Auto series/parallel connections	No	No	Yes		Yes	
Output sequencing	No	No	Yes		Yes	
E3633A/E3634A code compatible	Yes	Yes	No		No	
I/O interfaces	USB/LAB Opt-GPIB	USB/LAB Opt-GPIB	USB/LAB Opt-GPIB		USB/LAB Opt-GPIB	

1. ≤ 100 mA for E36231A and E36233A, ≤ 50 mA for E36232A and E36234A)

www.keysight.com/find/e36200

Find us at www.keysight.com

This information is subject to change without notice. © Keysight Technologies, 2019, Published in USA, March 26, 2019, 5992-3773EN



Key Values

Useable power 200 & 400 W

- Autoranging more current at all voltage
- Auto-parallel for higher current up to 40 A
- Auto-series for higher voltage up to 120 V
- Variable voltage slew rate to control inrush current

Low noise, DUT protection & precision measurements




- 350 μ Vrms noise
- Over-voltage, over-current, over-temperature protection
- Local 2-wire or remote 4-wire measurements
- Low range current measurement

Fully programmable power supply

- USB, LAN, Digital I/O and optional GPIB
- BenchVue PS application
- E3633A/E3634A code compatible

Advanced features

- Data logger
- Output LIST
- Sequence outputs

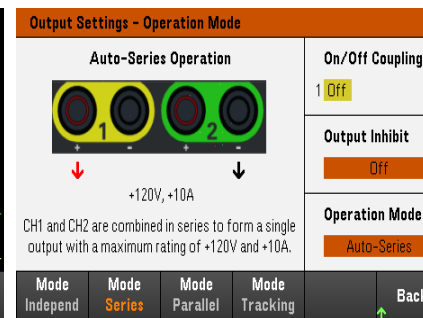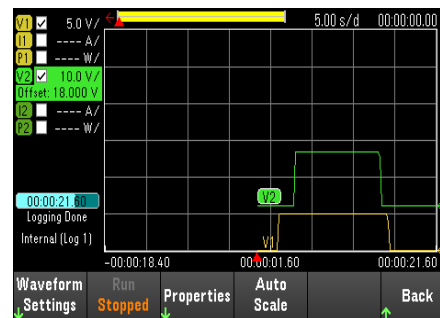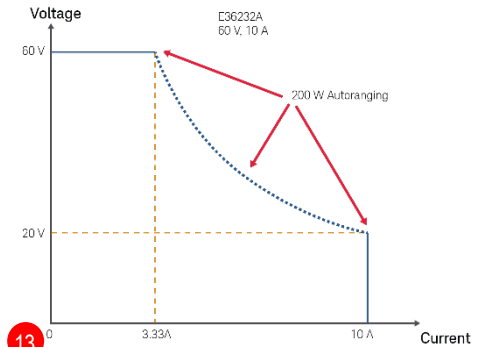

1. Front USB host port
2. Color display shows readback voltage, current and power for fast, simple setup and monitoring
3. Channel selection and voltage/ current knobs
4. Simple layout function keys and keypads
5. Two DC power outputs with individual on/off button (E36233A and E36234A only)
6. Output channels and controls are color-coded to display
7. Security lock slot
8. Rear output terminals
9. GPIB port
10. USB communication port
11. LXI LAN port
12. Digital I/O
13. Autoranging technology
14. Data logger
15. Auto series/parallel mode setting
16. E3633A (E36231A) and E3634A (E36232A) code compatible

Learn more at: www.keysight.com

Find us at www.keysight.com

This information is subject to change without notice. © Keysight Technologies, 2019, Published in USA, March 26, 2019, 5992-3773EN