

Keysight Technologies

PXA X-Series Signal Analyzer

N9030A

3 Hz to 3.6, 8.4, 13.6, 26.5, 43, 44, or 50 GHz

Data Sheet



Table of Contents

Definitions and Conditions	3
Frequency and Time Specifications	4
Amplitude Accuracy and Range Specifications	6
Dynamic Range Specifications	9
PowerSuite Measurement Specifications	16
General Specifications	17
Inputs and Outputs	18
Other Optional Outputs	21
I/Q Analyzer	22
I/Q Analyzer – Option B25	24
I/Q Analyzer – Option B40	25
I/Q Analyzer – Option B85 or B1X	26
Real-time spectrum analyzer (RTSA)	27
Related Literature	28

This data sheet is a summary of the specifications and conditions for N9030A PXA signal analyzers. For the complete specifications guide, visit: www.keysight.com/find/pxa_specifications

Drive your evolution

The Keysight Technologies, Inc. future-ready PXA signal analyzer is the evolutionary replacement for your current high-performance analyzer. It helps you sustain past achievements, enhance current designs and accelerate future innovations.

Its performance, flexibility, capability and compatibility enable you to address demanding applications in aerospace, defense, commercial communications and more.

- Reveal new levels of signal detail with outstanding RF performance
- Increase test throughput and protect your system investments
- Refresh legacy systems with a highly compatible replacement

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

The analyzer will meet its specifications when:

- The analyzer is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy.
- For signal frequencies < 10 MHz, DC coupling applied.
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range but outside the allowed operating range.
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user.

For the complete specifications guide, visit:
www.keysight.com/find/pxa_specifications

Frequency and Time Specifications

Frequency range		DC coupled	AC coupled
Option 503		3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508		3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 513		3 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526		3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 543		3 Hz to 43 GHz	NA
Option 544		3 Hz to 44 GHz	NA
Option 550		3 Hz to 50 GHz	NA
Band	LO multiple (N)		
0	1	3 Hz to 3.6 GHz	
1	1	3.5 to 8.4 GHz	
2	2	8.3 to 13.6 GHz	
3	2	13.5 to 17.1 GHz	
4	4	17 to 26.5 GHz	
5	4	26.4 to 34.5 GHz	
6	8	34.4 to 50 GHz	
Precision frequency reference			
Accuracy		\pm [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]	
Aging rate		$\pm 1 \times 10^{-7}$ / year $\pm 1.5 \times 10^{-7}$ / 2 years	
Temperature stability			
20 to 30 °C		$\pm 1.5 \times 10^{-8}$	
Full temperature range		$\pm 5 \times 10^{-8}$	
Achievable initial calibration accuracy		$\pm 4 \times 10^{-8}$	
Example frequency reference accuracy		$= \pm (1 \times 1 \times 10^{-7} + 1.5 \times 10^{-8} + 4 \times 10^{-8})$	
1 year after last adjustment 20 to 30 °C		$= \pm 1.55 \times 10^{-7}$	
Residual FM			
Center frequency = 1 GHz		$\leq (0.25 \text{ Hz} \times N)$ p-p in 20 ms nominal	
10 Hz RBW, 10 Hz VBW		See band table above for N (LO multiple)	
Frequency readout accuracy (start, stop, center, marker)			
\pm (marker frequency x frequency reference accuracy + 0.10% x span + 5% x RBW + 2 Hz + 0.5 x horizontal resolution ¹)			
Marker frequency counter			
Accuracy		\pm (marker frequency x frequency reference accuracy + 0.100 Hz)	
Delta counter accuracy		\pm (delta frequency x frequency reference accuracy + 0.141 Hz)	
Counter resolution		0.001 Hz	
Frequency span (FFT and swept mode)			
Range		0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution		2 Hz	
Accuracy			
Swept		$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$	
FFT		$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$	

1. Horizontal resolution is span/(sweep points -1).

Sweep time and triggering

Range	Span = 0 Hz Span \geq 10 Hz	1 μ s to 6000 s 1 ms to 4000 s
Accuracy	Span \geq 10 Hz, swept Span \geq 10 Hz, FFT Span = 0 Hz	\pm 0.01% nominal \pm 40% nominal \pm 0.01% nominal
Sweep trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger Delay	Span = 0 Hz or FFT Span \geq 10 Hz, swept Resolution	-150 to +500 ms 0 to 500 ms 0.1 μ s

Time gating

Gate methods	Gated LO; gated video; gated FFT
Gate length range (except method = FFT)	1 μ s to 5.0 s
Gate delay range	0 to 100.0 s
Gate delay jitter	33.3 ns p-p nominal

Sweep (trace) point range

All spans	1 to 40001
-----------	------------

Resolution bandwidth (RBW)

Range (-3.01 dB bandwidth)		
Standard	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
With Option B85 and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, and 70 MHz, in Spectrum Analyzer mode and zero span	
With Option B1X and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 100, and 133 MHz, in Spectrum Analyzer mode and zero span	
Bandwidth accuracy (power)	1 Hz to 100 kHz	\pm 0.5% (\pm 0.022 dB)
RBW range	110 kHz to 1.0 MHz (< 3.6 GHz CF)	\pm 1.0% (\pm 0.044 dB)
	1.1 to 2 MHz (< 3.6 GHz CF)	\pm 0.07 dB nominal
	2.2 to 3 MHz (< 3.6 GHz CF)	\pm 0.10 dB nominal
	4 to 8 MHz (< 3.6 GHz CF)	\pm 0.20 dB nominal
Bandwidth accuracy (-3.01 dB)		
RBW range	1 Hz to 1.3 MHz	\pm 2% nominal
Selectivity (-60 dB/-3 dB)	4.1:1 nominal	
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC required)

Analysis bandwidth ¹

Maximum bandwidth	Standard	10 MHz
	Option B25	25 MHz
	Option B40	40 MHz
	Option B85	85 MHz
	Option B1X	160 MHz

Video bandwidth (VBW)

Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)
Accuracy	\pm 6% nominal (in swept mode and zero span)

Measurement speed ²

	Standard
Local measurement and display update rate	10 ms (100/s) nominal
Remote measurement and LAN transfer rate	10 ms (100/s) nominal
Marker peak search	2.5 ms nominal
Center frequency tune and transfer (RF)	43 ms nominal
Center frequency tune and transfer (μ W)	69 ms nominal
Measurement/mode switching	40 ms nominal

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range			
Measurement range			
Preamp Off		Displayed average noise level (DANL) to +30 dBm	
Preamp On			
RF (Opt 503)		Displayed average noise level (DANL) to +30 dBm	
Microwave (Opt 508, 513, 526)		Displayed average noise level (DANL) to +24 dBm	
Millimeter-wave (Opt 543, 544, 550)		Displayed average noise level (DANL) to +20 dBm	
Input attenuator range (3 Hz to 50 GHz)		0 to 70 dB in 2 dB steps	
Electronic attenuator (Option EA3)			
Frequency range		3 Hz to 3.6 GHz	
Attenuation range			
Electronic attenuator range		0 to 24 dB, 1 dB steps	
Full attenuation range (mechanical + electronic)		0 to 94 dB, 1 dB steps	
Maximum safe input level			
Average total power (with and without preamp)		+30 dBm (1 W)	
Peak pulse power		< 10 μ s pulse width, < 1% duty cycle +50 dBm (100 W) and input attenuation \geq 30 dB	
DC volts			
DC coupled		\pm 0.2 Vdc	
AC coupled		\pm 100 Vdc (For frequency Option 503, 508, 513, or 526)	
Display range			
Log scale		0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)	
Linear scale		10 divisions	
Scale units		dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A	
Frequency response		Specification	95th percentile (\approx 2σ)
(10 dB input attenuation, 20 to 30 °C, preselector centering applied above 3.6 GHz)			
RF/MW (Option 503, 508, 513, 526)	3 Hz to 10 MHz	\pm 0.46 dB	
	10 to 20 MHz	\pm 0.35 dB	
	20 MHz to 3.6 GHz	\pm 0.35 dB	\pm 0.16 dB
	3.5 to 8.4 GHz	\pm 1.5 dB	\pm 0.39 dB
	8.3 to 13.6 GHz	\pm 2.0 dB	\pm 0.45 dB
	13.5 to 22.0 GHz	\pm 2.0 dB	\pm 0.62 dB
	22.0 to 26.5 GHz	\pm 2.5 dB	\pm 0.82 dB
Millimeter-Wave (Option 543, 544, 550)	3 Hz to 20 MHz	\pm 0.46 dB	
	20 to 50 MHz	\pm 0.35 dB	\pm 0.19 dB
	50 MHz to 3.6 GHz	\pm 0.35 dB	\pm 0.15 dB
	3.5 to 5.2 GHz	\pm 1.7 dB	\pm 0.70 dB
	5.2 to 8.4 GHz	\pm 1.5 dB	\pm 0.57 dB
	8.3 to 13.6 GHz	\pm 2.0 dB	\pm 0.54 dB
	13.5 to 17.1 GHz	\pm 2.0 dB	\pm 0.64 dB
	17.0 to 22.0 GHz	\pm 2.0 dB	\pm 0.72 dB
	22.0 to 26.5 GHz	\pm 2.5 dB	\pm 0.71 dB
	26.4 to 34.5 GHz	\pm 2.5 dB	\pm 0.93 dB
34.4 to 50 GHz	\pm 3.2 dB	\pm 1.24 dB	
Preamp on (0 dB attenuation) (Option P03, P08, P13, P26, P43, P44, P50)			
RF/MW (Option 503, 508, 513, 526)	9 to 100 kHz		\pm 0.36 dB
	100 kHz to 50 MHz	\pm 0.68 dB	\pm 0.26 dB
	50 MHz to 3.6 GHz	\pm 0.55 dB	\pm 0.28 dB
	3.5 to 8.4 GHz	\pm 2.0 dB	\pm 0.64 dB
	8.3 to 13.6 GHz	\pm 2.3 dB	\pm 0.76 dB
	13.5 to 17.1 GHz	\pm 2.5 dB	\pm 0.95 dB
	17.0 to 22.0 GHz	\pm 3.0 dB	\pm 1.41 dB
22.0 to 26.5 GHz	\pm 3.5 dB	\pm 1.61 dB	

Frequency response	Specification	95th percentile ($\approx 2\sigma$)
Millimeter-Wave (Option 543, 544, 550)	9 to 100 kHz	± 0.40 dB
	100 kHz to 50 MHz	± 0.68 dB
	50 MHz to 3.6 GHz	± 0.60 dB
	3.5 to 5.2 GHz	± 2.0 dB
	5.2 to 8.4 GHz	± 2.0 dB
	8.3 to 13.6 GHz	± 2.3 dB
	13.5 to 17.1 GHz	± 2.5 dB
	17.0 to 22.0 GHz	± 3.0 dB
	22.0 to 26.5 GHz	± 3.5 dB
26.4 to 34.5 GHz	± 3.0 dB	
34.4 to 50 GHz	± 4.1 dB	
34.4 to 50 GHz	± 4.1 dB	± 1.69 dB

Input attenuation switching uncertainty	Specifications	Additional information
Relative to 10 dB and preamp off		
At 50 MHz (reference frequency)	attenuation 12 to 40 dB	± 0.14 dB
	attenuation 2 to 8 dB	± 0.18 dB
	attenuation 0 dB	± 0.05 dB nominal
attenuation > 2 dB		
3 Hz to 3.6 GHz		± 0.3 dB nominal
3.5 to 8.4 GHz		± 0.5 dB nominal
8.3 to 13.6 GHz		± 0.7 dB nominal
13.5 to 26.5 GHz		± 0.7 dB nominal
26.4 to 50 GHz		± 1.0 dB nominal

Total absolute amplitude accuracy

(10 dB attenuation, 20 to 30 °C, 1 Hz \leq RBW \leq 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)

	At 50 MHz	± 0.24 dB
	At all frequencies	$\pm (0.24 \text{ dB} + \text{frequency response})$
	10 Hz to 3.6 GHz	± 0.19 dB (95th Percentile approx. 2σ)
Preamp on (Option P03, P08, P13, P26, P43, P44 and P50)	At all frequencies	$\pm (0.36 \text{ dB} + \text{frequency response})$

Input voltage standing wave ratio (VSWR)

		Freq Opt 503, 508, 513, 526	Freq Opt 543, 544, 550
(10 dB input attenuation)	50 MHz	1.07:1 nominal	1.025:1 nominal
	10 MHz to 3.6 GHz	1.139 (95th percentile)	1.134 (95th percentile)
	3.5 to 8.4 GHz	1.290 (95th percentile)	1.152 (95th percentile)
	8.3 to 13.6 GHz	1.388 (95th percentile)	1.178 (95th percentile)
	13.5 to 17.1 GHz	1.403 (95th percentile)	1.204 (95th percentile)
	17.0 to 26.5 GHz	1.475 (95th percentile)	1.331 (95th percentile)
	26.4 to 34.5 GHz	NA	1.321 (95th percentile)
	34.4 to 50 GHz	NA	1.378 (95th percentile)
	Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P43, P44, and P50)	10 MHz to 3.6 GHz	1.45 (95th percentile)
3.5 to 8.4 GHz		1.54 (95th percentile)	1.50 (95th percentile)
8.3 to 13.6 GHz		1.57 (95th percentile)	1.310 (95th percentile)
13.5 to 17.1 GHz		1.48 (95th percentile)	1.330 (95th percentile)
17.0 to 26.5 GHz		1.54 (95th percentile)	1.339 (95th percentile)
26.4 to 34.5 GHz		NA	1.41 (95th percentile)
34.4 to 50 GHz		NA	1.42 (95th percentile)

Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)

1 Hz to 1.5 MHz RBW	± 0.03 dB
1.6 MHz to 2.7 MHz RBW	± 0.05 dB
3 MHz RBW	± 0.10 dB
4, 5, 6, 8 MHz RBW	± 0.30 dB

Reference level

Range	
Log scale	-170 to +30 dBm in 0.01 dB steps
Linear scale	707 pV to 7.07 V with 0.11% (0.01 dB) resolution
Accuracy	0 dB

Display scale switching uncertainty

Switching between linear and log	0 dB
Log scale/div switching	0 dB

Display scale fidelity

Between -10 dBm and -80 dBm input mixer level	± 0.10 dB total	± 0.04 dB typical
Below -18 dBm input mixer level	± 0.07 dB	± 0.02 dB typical

Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

Preamplifier

Frequency range ¹	Option P03	9 kHz to 3.6 GHz
	Option P08	9 kHz to 8.4 GHz
	Option P13	9 kHz to 13.6 GHz
	Option P26	9 kHz to 26.5 GHz
	Option P43	9 kHz to 43 GHz
	Option P44	9 kHz to 44 GHz
	Option P50	9 kHz to 50 GHz
Gain	9 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB nominal
	26.5 to 50 GHz	+40 dB nominal

1. Below 100 kHz, only 95th percentile (approx. 2σ) value for frequency response is provided.

Dynamic Range Specifications

1 dB gain compression (two-tone)**Maximum power at input mixer**

(At 1 kHz RBW with 100 kHz tone spacing, 20 to 30 °C)

	20 to 40 MHz	-3 dBm	0 dBm typical
	40 to 200 MHz	+1 dBm	+3 dBm typical
	200 MHz to 3.6 GHz	+3 dBm	+5 dBm typical
	3.6 to 16 GHz	+1 dBm	+4 dBm typical
	16 to 26.5 GHz	-1 dBm	+2 dBm typical
	26.5 to 50 GHz		0 dBm nominal
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)	10 MHz to 3.6 GHz		-14 dBm nominal
	3.6 to 26.5 GHz		
	Tone spacing 100 kHz to 20 MHz		-28 dBm nominal
	Tone spacing > 70 MHz		
	Freq Option ≤ 526		-10 dBm nominal
Freq Option > 526		-20 dBm nominal	
	26.5 to 50 GHz		-30 dBm nominal

Displayed average noise level (DANL)		Specification	Typical
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 1 Hz RBW, 20 to 30 °C)			
RF/MW (Option 503, 508, 513, 526)		Normal ¹ /LNP enabled ²	Normal ¹ /LNP enabled ²
Preamp off	3 Hz to 9 kHz		-100 dBm/NA typical
	9 to 100 kHz	-146 dBm/NA	-152 dBm/NA typical
	100 kHz to 1 MHz	-150 dBm/NA	-156 dBm/NA typical
	1 to 10 MHz	-155 dBm/NA	-158 dBm/NA typical
	10 MHz to 1.2 GHz	-155 dBm/NA	-157 dBm/NA typical
	1.2 to 2.1 GHz	-153 dBm/NA	-155 dBm/NA typical
	2.1 to 3.0 GHz	-152 dBm/NA	-154 dBm/NA typical
	3.0 to 3.6 GHz	-151 dBm/NA	-153 dBm/NA typical
	3.5 to 4.2 GHz	-147 dBm/-153 dBm	-150 dBm/-156 dBm typical
	4.2 to 8.4 GHz	-150 dBm/-155 dBm	-152 dBm/-157 dBm typical
	8.3 to 13.6 GHz	-149 dBm/-155 dBm	-151 dBm/-157 dBm typical
	13.5 to 16.9 GHz	-145 dBm/-152 dBm	-147 dBm/-155 dBm typical
	16.9 to 20.0 GHz	-143 dBm/-151 dBm	-145 dBm/-153 dBm typical
	20.0 to 26.5 GHz	-137 dBm/-150 dBm	-140 dBm/-152 dBm typical
Preamp on Option P03, P08, P13, P26	100 to 200 kHz	-157 dBm/NA	-160 dBm/NA typical
	200 to 500 kHz	-160 dBm/NA	-163 dBm/NA typical
	0.5 to 1 MHz	-164 dBm/NA	-166 dBm/NA typical
Option P03, P08, P13, P26	1 to 10 MHz	-164 dBm/NA	-167 dBm/NA typical
Option P03, P08, P13, P26	10 MHz to 2.1 GHz	-165 dBm/NA	-166 dBm/NA typical
Option P03, P08, P13, P26	2.1 to 3.6 GHz	-163 dBm/NA	-164 dBm/NA typical
Option P08, P13, P26 ³	3.5 to 8.4 GHz	-164 dBm/NA	-166 dBm/NA typical
Option P13, P26 ³	8.3 to 13.6 GHz	-163 dBm/NA	-165 dBm/NA typical
Option P26 ³	13.5 to 16.9 GHz	-161 dBm/NA	-162 dBm/NA typical
Option P26 ³	16.9 to 20.0 GHz	-159 dBm/NA	-161 dBm/NA typical
Option P26 ³	20.0 to 26.5 GHz	-155 dBm/NA	-157 dBm/NA typical

DANL with Noise Floor Extension (Option NFE⁴) improvement

DANL improvement exceeds 9 dB with 95% confidence in the average of all bands, paths (normal, preamp, low noise path and microwave preselector bypass), frequency options and signal path options (LNP and MPB).

Examples of effective DANL Frequency 20 to 30 °C	Preamp Off	Preamp On	LNP enabled ^{2,3}
Mid-Band 0 (1.8 GHz)	-161 dBm	-171 dBm	NA
Mid-Band 1 (5.95 GHz)	-158 dBm	-172 dBm	-162 dBm
Mid-Band 2 (10.95 GHz)	-159 dBm	-168 dBm	-162 dBm
Mid-Band 3 (15.3 GHz)	-152 dBm	-165 dBm	-160 dBm
Mid-Band 4 (21.75 GHz)	-149 dBm	-160 dBm	-160 dBm

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

4. Beginning January 2015, all PXAs ship standard with the second-generation of NFE (instrument alignment based) installed as N9030A-NF2.

Millimeter-Wave (Option 543, 544, 550)		Normal ¹ /LNP enabled ²	Normal ¹ /LNP enabled ²	
Preamp off	3 Hz to 9 kHz		-100 dBm/NA nominal	
	9 to 100 kHz	-146 dBm/NA	-152 dBm/NA typical	
	100 kHz to 1 MHz	-150 dBm/NA	-156 dBm/NA typical	
	1 to 10 MHz	-155 dBm/NA	-158 dBm/NA typical	
	10 MHz to 1.2 GHz	-155 dBm/NA	-157 dBm/NA typical	
	1.2 to 2.1 GHz	-153 dBm/NA	-155 dBm/NA typical	
	2.1 to 3 GHz	-152 dBm/NA	-154 dBm/NA typical	
	3 to 3.6 GHz	-151 dBm/NA	-153 dBm/NA typical	
	3.5 to 4.2 GHz	-143 dBm/-150 dBm	-153 dBm/NA typical	
	4.2 to 6.6 GHz	-144 dBm/-152 dBm	-147 dBm/-154 dBm typical	
	6.6 to 8.4 GHz	-147 dBm/-154 dBm	-148 dBm/-155 dBm typical	
	8.3 to 13.6 GHz	-147 dBm/-153 dBm	-149 dBm/-156 dBm typical	
	13.5 to 14 GHz	-143 dBm/-150 dBm	-149 dBm/-152 dBm typical	
	14 to 17 GHz	-145 dBm/-151 dBm	-146 dBm/-153 dBm typical	
	17 to 22.5 GHz	-141 dBm/-149 dBm	-148 dBm/-152 dBm typical	
	22.5 to 26.5 GHz	-139 dBm/-146 dBm	-146 dBm/-150 dBm typical	
	26.4 to 34 GHz	-138 dBm/-146 dBm	-142 dBm/-149 dBm typical	
33.9 to 37 GHz	-134 dBm/-141 dBm	-139 dBm/-147 dBm typical		
37 to 40 GHz	-132 dBm/-140 dBm	-138 dBm/-145 dBm typical		
40 to 46 GHz	-130 dBm/-140 dBm	-135 dBm/-145 dBm typical		
46 to 49 GHz	-130 dBm/-138 dBm	-135 dBm/-142 dBm typical		
49 to 50 GHz	-128 dBm/-138 dBm	-133 dBm/-142 dBm typical		
Preamp on Option P03, P08, P13, P26, P43, P44, P50 ³	100 to 200 kHz	-157 dBm/NA	-160 dBm/NA typical	
	200 to 500 kHz	-160 dBm/NA	-163 dBm/NA typical	
	500 kHz to 1 MHz	-162 dBm/NA	-165 dBm/NA typical	
	1 to 10 MHz	-164 dBm/NA	-167 dBm/NA typical	
	10 MHz to 2.1 GHz	-164 dBm/NA	-166 dBm/NA typical	
	2.1 to 3.6 GHz	-163 dBm/NA	-164 dBm/NA typical	
Option P08, P13, P26, P43, P44, P50 ³	3.5 to 8.4 GHz	-161 dBm/NA	-163 dBm/NA typical	
	Option P13, P26, P43, P44, P50 ³	8.3 to 13.6 GHz	-161 dBm/NA	-163 dBm/NA typical
	Option P26, P43, P44, P50 ³	13.5 to 17 GHz	-161 dBm/NA	-163 dBm/NA typical
		17 to 20 GHz	-160 dBm/NA	-163 dBm/NA typical
	20 to 26.5 GHz	-158 dBm/NA	-161 dBm/NA typical	
Option P43, P44, P50 ³	26.4 to 30 GHz	-157 dBm/NA	-159 dBm/NA typical	
	30 to 34 GHz	-155 dBm/NA	-158 dBm/NA typical	
	33.9 to 37 GHz	-153 dBm/NA	-157 dBm/NA typical	
	37 to 40 GHz	-152 dBm/NA	-156 dBm/NA typical	
	40 to 43 GHz	-149 dBm/NA	-154 dBm/NA typical	
Option P44, P50 ³	43 to 44 GHz	-149 dBm/NA	-154 dBm/NA typical	
Option P50 ³	44 to 46 GHz	-149 dBm/NA	-154 dBm/NA typical	
	46 to 50 GHz	-146 dBm/NA	-150 dBm/NA typical	

1. With the NFE (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

DANL with Noise Floor Extension (NFE) on		Improvement @ 95th percentile		
		Preamp Off	Preamp On	LNP enabled ^{1,2}
Millimeter-Wave (Option 543, 544, 550)				
Band 0, f > 20 MHz		10 dB	9 dB	N/A
Band 1		9 dB	9 dB	10 dB
Band 2		9 dB	8 dB	9 dB
Band 3		9 dB	8 dB	10 dB
Band 4		10 dB	9 dB	11 dB
Band 5		11 dB	9 dB	12 dB
Band 6		11 dB	8 dB	11 dB
Example of effective DANL Frequency 20 to 30 °C	Preamp Off	Preamp On	LNP enabled ^{1,2}	
Mid-Band 0 (1.8 GHz)	-160 dBm	-172 dBm	N/A	
Mid-Band 1 (5.95 GHz)	-154 dBm	-164 dBm	-157 dBm	
Mid-Band 2 (10.95 GHz)	-155 dBm	-167 dBm	-157 dBm	
Mid-Band 3 (15.3 GHz)	-154 dBm	-167 dBm	-157 dBm	
Mid-Band 4 (21.75 GHz)	-152 dBm	-165 dBm	-157 dBm	
Mid-Band 5 (30.4 GHz)	-148 dBm	-160 dBm	-157 dBm	
Mid-Band 6 (42.7 GHz)	-143 dBm	-156 dBm	-150 dBm	

1. LNP (Low Noise Path) requires option LNP.

2. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

Residues, images, and spurious responses

Residual responses (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz Zero span or FFT or other frequencies	-100 dBm -100 dBm nominal
--	--	------------------------------

Image responses	Tuned Freq (f)	Excitation Freq	Response
(Mixer level at -10 dBm)	10 MHz to 26.5 GHz	f+45 MHz	-80 dBc -118 dBc typical
	10 MHz to 3.6 GHz	f+10,245 MHz	-80 dBc -112 dBc typical
	10 MHz to 3.6 GHz	f+645 MHz	-80 dBc -101 dBc typical
	3.5 to 13.6 GHz	f+645 MHz	-78 dBc -87 dBc typical
	13.5 to 17.1 GHz	f+645 MHz	-74 dBc -84 dBc typical
	17.0 to 22 GHz	f+645 MHz	-70 dBc -82 dBc typical
	22 to 26.5 GHz	f+645 MHz	-68 dBc -79 dBc typical
(Mixer level at -30 dBm)	26.5 to 34.5 GHz	f+645 MHz	-68 dBc -84 dBc typical
	34.4 to 44 GHz	f+645 MHz	-57 dBc -79 dBc typical
	44 to 50 GHz	f+645 MHz	-75 dBc nominal

Other spurious responses	Mixer level	Response
Carrier frequency \leq 26.5 GHz		
First RF order (f \geq 10 MHz from carrier)	-10 dBm	-80 dBc + 20log(N ¹) Including IF feedthrough, LO harmonic mixing responses
Higher RF order (f \geq 10 MHz from carrier)	-40 dBm	-80 dBc + 20log(N ¹) Including higher order mixer responses
Carrier frequency > 26.5 GHz		
First RF order (f \geq 10 MHz from carrier)	-30 dBm	-90 dBc nominal
Higher RF order (f \geq 10 MHz from carrier)	-30 dBm	-90 dBc nominal
LO-related spurious responses (200 Hz \leq f < 10 MHz from carrier), Mixer level at -10 dBm	-68 dBc ² + 20log(N ¹)	
Line-related spurious responses		-73 dBc ² + 20log(N ¹) (nominal)

Second harmonic distortion (SHI)

	Source frequency	Mixer level	Distortion ³	SHI ³
RF/MW (Option 503, 508, 513, 526)	10 to 100 MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	0.1 to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.75 to 2.5 GHz	-15 dBm	-77 dBc/-95 dBc	+62 dBm/+80 dBm
	2.5 to 4 GHz	-15 dBm	-77 dBc/-101 dBc	+62 dBm/+86 dBm
	4 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm

	Preamp level	Distortion	SHI	
Preamp on (Option P03, P08, P13, P26)	10 MHz to 1.8 GHz	-45 dBm	-78 dBc nominal	+33 dBm nominal
	1.8 to 13.25 GHz	-50 dBm	-60 dBc nominal	+10 dBm nominal

Millimeter-Wave	Mixer level	Distortion ³	SHI ³	
(Option 543, 544, 550)	10 to 100MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	100 M to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.8 to 2.5 GHz	-15 dBm	-72 dBc/-95 dBc	+57 dBm/+80 dBm
	2.5 to 3 GHz	-15 dBm	-72 dBc/-99 dBc	+57 dBm/+84 dBm
	3 to 5 GHz	-15 dBm	-77 dBc/-99 dBc	+62 dBm/+84 dBm
	5 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm
	13.25 to 25 GHz	-15 dBm	-65 dBc/-105 dBc (nom.)	+50 dBm/+90 dBm (nom.)

Preamp on (Option P03, P08, P13, P26, P43, P44, P50)	Preamp level	Distortion	SHI	
	10 MHz to 1.8 GHz	-45 dBm	-78 dBc (nominal)	+33 dBm (nominal)
	1.8 to 13.25 GHz	-50 dBm	-60 dBm (nominal)	+10 dBm (nominal)
	13.25 to 25 GHz	-50 dBm	-50 dBm (nominal)	0 dBm (nominal)

1. N is the LO multiplication factor. Refer to page 4 for the N value versus frequency ranges.
2. Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.
3. Normal path/LNP enabled (requires Option LNP).

Third-order intermodulation distortion (TOI)

(two -16 dBm tones at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C)

For all frequency options (Option 503, 508, 513, 526, 543, 544, and 550)	10 to 150 MHz	+13 dBm	+16 dBm typical
	150 to 600 MHz	+18 dBm	+21 dBm typical
	0.6 to 1.1 GHz	+20 dBm	+22 dBm typical
	1.1 to 3.6 GHz	+21 dBm	+23 dBm typical
For RF/MW only (Option 503, 508, 513, and 526)	3.5 to 8.4 GHz	+17 dBm	+23 dBm typical
	8.3 to 13.6 GHz	+17 dBm	+23 dBm typical
	13.5 to 17.1 GHz	+15 dBm	+20 dBm typical
	17.0 to 26.5 GHz	+16 dBm	+22 dBm typical
For Millimeter-Wave only (Option 543, 544, and 550)	3.5 to 8.4 GHz	+16 dBm	+23 dBm typical
	8.3 to 13.6 GHz	+16 dBm	+23 dBm typical
	13.5 to 17.1 GHz	+13 dBm	+17 dBm typical
	17.0 to 26.5 GHz	+13 dBm	+20 dBm typical
	26.5 to 50 GHz	+13 dBm	+13 dBm nominal
Preamp on (Option P03, P08, P13, P26, P43, P44, and P50)			
Tones at preamp input			
(two -45 dBm)	10 to 500 MHz	+4 dBm nominal	
(two -45 dBm)	500 MHz to 3.6 GHz	+4.5 dBm nominal	
(two -50 dBm)	3.6 to 26.5 GHz	-15 dBm nominal	

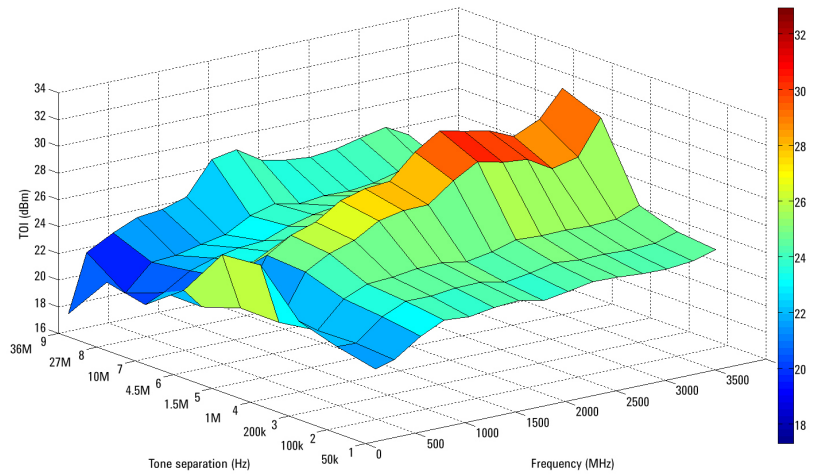


Figure 1. Nominal TOI performance versus frequency and tone separation

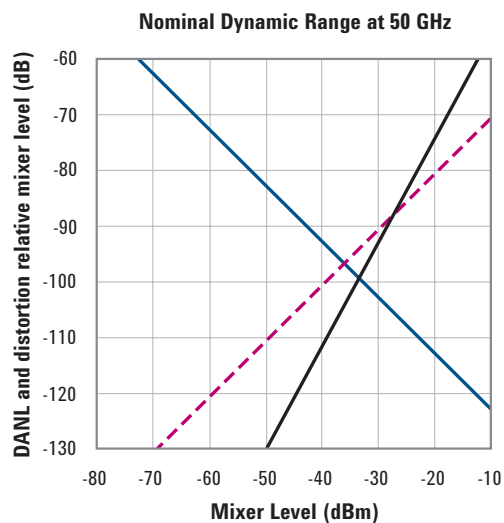
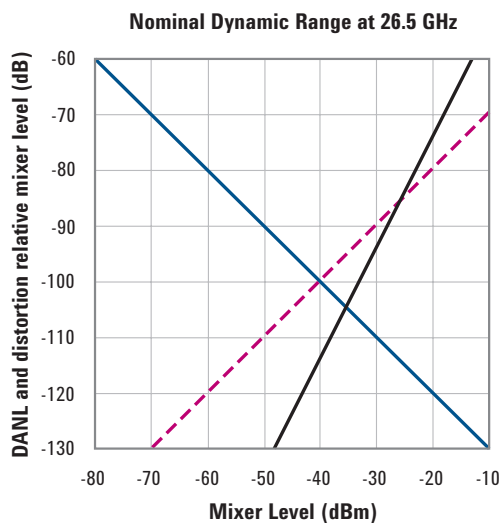
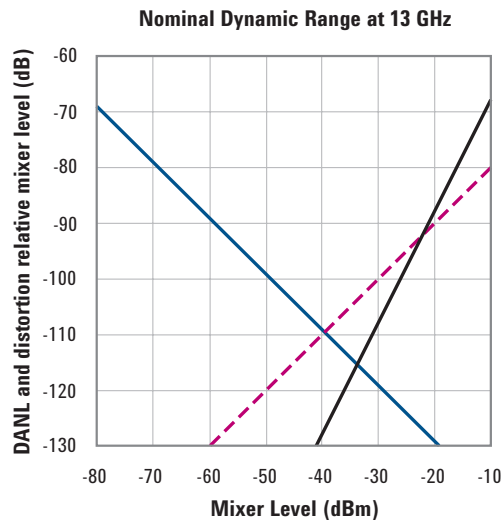
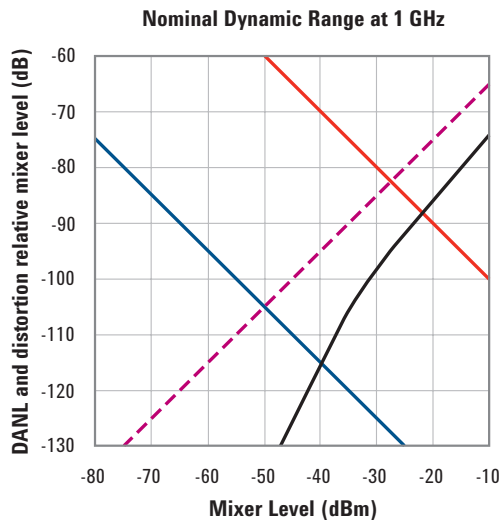


Figure 2a. Third-order dynamic range plots

Figure 2b. Third-order dynamic range plots

- DANL (30 kHz RBW)
- DANL (1 Hz RBW)
- - 2nd Harmonic Distortion
- 3rd Order Intermodulation

Phase noise	Offset	Specification	Typical
Noise sidebands	10 Hz		-80 dBc/Hz nominal
(20 to 30 °C, CF = 1 GHz)	100 Hz	-94 dBc/Hz	-100 dBc/Hz typical
	1 kHz	-121 dBc/Hz	-125 dBc/Hz typical
	10 kHz	-129 dBc/Hz	-132 dBc/Hz typical
	30 kHz	-130 dBc/Hz	-132 dBc/Hz typical
	100 kHz	-129 dBc/Hz	-131 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-158 dBc/Hz typical

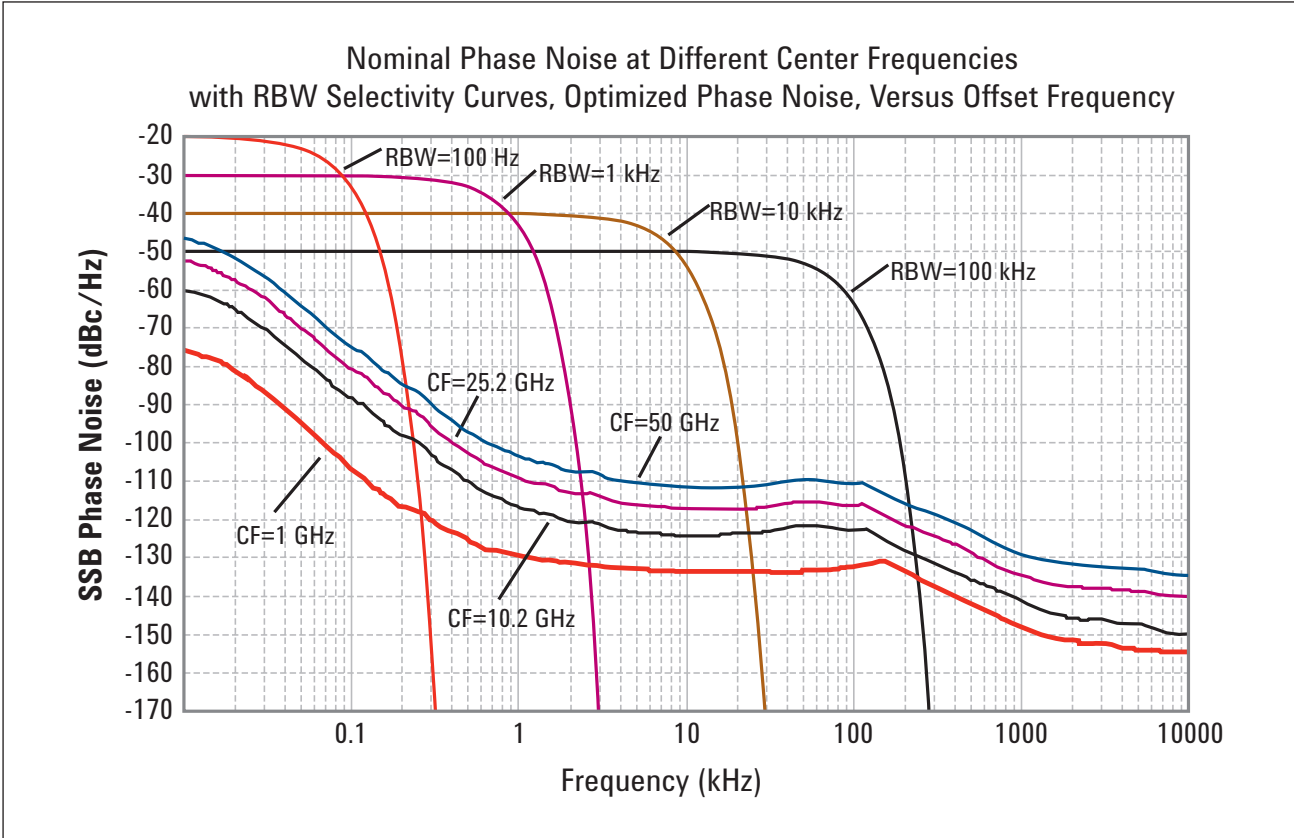


Figure 3. Nominal PXA phase noise at various center frequencies

Option MPB, microwave preselector bypass ¹

Frequency range	
N9030A-508	3.6 to 8.4 GHz
N9030A-513	3.6 to 13.6 GHz
N9030A-526	3.6 to 26.5 GHz
N9030A-543	3.6 to 43 GHz
N9030A-544	3.6 to 44 GHz
N9030A-550	3.6 to 50 GHz

1. When Option MPB is installed and enabled, some aspects of the analyzer performance change. Please refer to the N9030A PXA specification guide for more details.

PowerSuite Measurement Specifications

Channel power		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.61 dB (± 0.19 dB 95th percentile)	
Occupied bandwidth		
Frequency accuracy	± [span/1000] nominal	
Adjacent channel power		
Accuracy, 3GPP W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
MS (UE)	± 0.08 dB	± 0.09 dB
BTS	± 0.20 dB	± 0.18 dB
Dynamic range (typical)		
Without noise correction	-82.5 dB	-87 dB
With noise correction	-83.5 dB	-89.5 dB
Offset channel pairs measured	1 to 6	
Multi-carrier ACP		
Accuracy, 3GPP W-CDMA (ACPR) (4 carriers, 5 MHz offset, BTS, UUT ACPR range at -42 to -48 dB, optimal mixer level at -15 dBm)	± 0.09 dB	
Multiple number of carriers measured	Up to 12	
Power statistics CCDF		
Histogram resolution	0.01 dB	
Harmonic distortion		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBC), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
Burst power		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission		
3GPP W-CDMA table-driven spurious signals; search across regions		
Dynamic range (1 to 3.6 GHz)	88.8 dB	(92.1 dB typical)
Absolute sensitivity (1 to 3.6 GHz)	-88.5 dBm	(-91.5 dBm typical)
Spectrum emission mask (SEM)		
cdma2000® (750 kHz offset)		
Relative dynamic range	85.9 dB	(89.5 dB typical)
Absolute sensitivity	-103.7 dBm	(-106.7 dBm typical)
Relative accuracy	± 0.06 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range	87.9 dB	(92.6 dB typical)
Absolute sensitivity	-103.7 dBm	(-106.7 dBm typical)
Relative accuracy	± 0.08 dB	

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	-40 to +70 °C

Altitude

4,500 meters (approx 15,000 feet)

EMC

Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):

- IEC/EN 61326-1 or IEC/EN 61326-2-1
- CISPR 11 Group 1, Class A
- AS/NZS CISPR 11:2002
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1 3rd Edition
- Canada: CSA C22.2 No. 61010-1-12
- USA: UL 61010-1 3rd Edition

Acoustic statement (European Machinery Directive 2002/42/EC, 1.7.4.2u)

Acoustic noise emission

LpA < 70 dB

Operator position

Normal position

Per ISO 7779

Acoustic noise - more information

(Values given are per ISO 7779 standard in the "Operator Sitting" position)

Ambient temperature

< 40 °C

Nominally under 55 dBA Sound Pressure. 55 dBA is generally considered suitable for use in quiet office environment

≥ 40 °C

Nominally under 65 dBA Sound Pressure. 65 dBA is generally considered suitable for use in noisy office environment

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

Power requirements

Voltage and frequency	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
-----------------------	--

Power consumption

On	630 W (Maximum)
Standby	40 W

Display

Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)

Data storage

Internal	Removable solid state drive (80 GB)
External	Supports USB 2.0 compatible memory devices

Weight (without options)

Net	22 kg (48 lbs) nominal
Shipping	34 kg (75 lbs) nominal

Dimensions

Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)

Warranty

The PXA signal analyzer is supplied with a 3-year standard warranty

Calibration cycle

The recommended calibration cycle is one year. Calibration services are available through Keysight service centers

Inputs and Outputs

Front panel

RF input Connector	
Standard (Option 503, 508, 513, 526)	Type-N female, 50 Ω nominal
Option C35 (with Option 526 only)	APC 3.5 mm male, 50 Ω nominal
Standard (Option 543, 544, 550)	2.4 mm male, 50 Ω nominal
Analog baseband IQ inputs (Option BBA) ¹	
Connectors (I, Q, I-Bar, Q-Bar, and Cal Out)	BNC female
Cal Out	
Signal	AC coupled square wave
Frequency	Selectable between 1 kHz and 250 kHz
Input impedance (4 connectors: I, Q, I-, Q-)	50 Ω , 1 M Ω (selectable, nominal)
Probes supported ²	
Active probe	1130A, 1131A, 1132A, 1134A
Passive probe	1161A
Input return loss	-5 dB (0 to 10 MHz, nominal)
50 Ω impedance only selected	-0 dB (10 to 40 MHz, nominal)
Probe power	
Voltage/current	+15 Vdc, \pm 7% at 150 mA max nominal -12.6 Vdc, \pm 10% at 150 mA max nominal
USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
Headphone jack	Miniature stereo audio jack (3.5 mm, also known as "1/8 inch")

1. For additional specifications, please refer to Chapter BAA in the N9030A PXA Signal Analyzer specification guide

2. For more details, please refer to the Keysight Probe Configuration Guides, literature numbers 5968-7141EN and 5989-6162EN; probe heads are necessary to attach to your device properly and probe connectivity kits such as E2668B, E2669A, or E2675A are required.

External mixing, Option EXM

Connection port	
Connector	SMA, female
Impedance	50 Ω nominal
Functions	Triplexed for mixer bias, IF input and LO output
Mixer bias range	± 10 mA in 10 μ A step
IF input center frequency	
Narrowband IF path	322.5 MHz
40 MHz BW IF path	250.0 MHz
85 or 160 MHz BW IF path	300 MHz
LO output frequency range	3.75 to 14.0 GHz

Rear panel

10 MHz out	
Connector	BNC female, 50 Ω nominal
Output amplitude	≥ 0 dBm nominal
Frequency	10 MHz + (10 MHz x frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 Ω nominal
Input amplitude range	-5 to 10 dBm nominal
Input frequency	1 to 50 MHz nominal (selectable to 1 Hz resolution)
Frequency lock range	$\pm 2 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	> 10 k Ω nominal
Trigger level range	-5 to +5 V (TTL) factory preset
Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 Ω nominal
Level	0 to 5 V (CMOS) nominal
Sync (reserved for future use)	
Connector	BNC female
Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
Output voltage	On 28.0 \pm 0.1 V (60 mA maximum) Off < 1 V
SNS series noise source	For use with the Keysight SNS Series noise sources
Digital bus	
Connector	MDR-80

Rear panel

Analog out	
Connector	BNC female
USB 2.0 ports	
Master (3 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
Slave (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-B female
Output current	0.5 A nominal
GPIO interface	
Connector	IEEE-488 bus connector
GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIO mode	Controller or device
LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 Ethertwist
IF output	
Connector	SMA female, shared by Opts CR3, CRP, and ALV
Impedance	50 Ω nominal

2nd IF output, Option CR3

Center frequency	
SA mode or I/Q analyzer with IF BW \leq 25 MHz	322.5 MHz
with Option B40	250 MHz
with Option B85/B1X	300 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Low band	Up to 160 MHz (nominal)
High band, with preselector	Depends on center frequency
High band, with preselector bypassed ¹	Up to 700 MHz (nominal); expandable to 900 MHz with corrections

Arbitrary IF output, Option CRP

Center frequency	
Range	10 to 75 MHz (user selectable)
Resolution	0.5 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Output at 70 MHz	
Low band or high band with preselector bypassed	100 MHz (nominal)
Preselected band	Depends on RF center frequency
Lower output frequencies	Subject to folding
Residual output signals	\leq -88 dBm (nominal)

1. The maximum bandwidth is not centered around the IF output center frequency.

Other Optional Output

Option ALV Log video out

General port specifications		
Connector	SMA female	Shared with other options
Impedance		50 Ω nominal
Fast log video output		
Output voltage	Open-circuit voltages shown	
Maximum	1.6 V at -10 dBm nominal	
Slope	25 \pm 1 mV/dB nominal	
Log fidelity		
Range	49 dB (nominal) with input frequency at 1 GHz	
Accuracy within range	\pm 1.0 dB nominal	
Rise time	15 ns nominal	
Fall time		
Bands 1-4 with Option MPB	40 ns nominal best case,	
Other cases	Depends on bandwidth	

Option YAV Y-Axis output

General port specifications		
Connector	BNC female	Shared with other options
Impedance		50 Ω nominal
Screen video		
Operating conditions		
Display scale types	Log or Lin	"Lin" is linear in voltage
Log scales	All (0.1 to 20 dB/div)	
Modes	Spectrum analyzer only	
Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
Offset	\pm 1% of full scale nominal	
Gain accuracy	\pm 1% of output voltage nominal	
Delay between RF input to analog output	71.7 μ s +2.56/RBW + 0.159/VBW nominal	
Log video (Log envelope) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for -10 dBm at the mixer	
Scale factor	1 V per 192.66 dB	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
Linear video (AM Demod) output		
Amplitude range (terminated with 50 Ω)		
Maximum	1.0 V nominal for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	

I/Q Analyzer

Frequency

Frequency span	
Standard instrument	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B40	10 Hz to 40 MHz
Option B85	10 Hz to 85 MHz
Option B1X	10 Hz to 160 MHz

Resolution bandwidth (spectrum measurement)

Range	
Overall	100 mHz to 3 MHz
Span = 1 MHz	50 Hz to 3 MHz
Span = 10 kHz	1 Hz to 10 kHz
Span = 100 Hz	100 mHz to 100 Hz
Window shapes	Flat Top, Uniform, Hanning, Hamming, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

Analysis bandwidth (waveform measurement)

Standard instrument	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B40	10 Hz to 40 MHz
Option B85	10 Hz to 85 MHz
Option B1X	10 Hz to 160 MHz

IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency)

Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
≤ 3.6	≤ 10	± 0.20 dB	± 0.12 dB	± 0.10 dB	0.02 dB
3.6 to 26.5	≤ 10 preselected				0.23 dB
3.6 to 26.5	≤ 10 preselector off ¹	± 0.25 dB	± 0.12 dB	± 0.10 dB	0.02 dB
26.5 to 50	≤ 10 preselected				0.12 dB
26.5 to 50	≤ 10 preselected off ¹	± 0.30 dB	± 0.12 dB	± 0.10 dB	0.024 dB

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

IF phase linearity				
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)	RMS (nominal)
≥ 0.02, < 3.6	≤ 10	NA	0.06°	0.012°
≥ 3.6 to ≤ 26.5	≤ 10	Off ¹	0.10°	0.022°
≥ 3.6	≤ 10	On	0.11°	0.024°
Dynamic range (standard 10 MHz IF path)				
Clipping-to-noise dynamic range			Excluding residuals and spurious responses	
Clipping level at mixer			Center frequency ≥ 20 MHz	
IF gain = Low	-10 dBm		-8 dBm nominal	
IF gain = High	-20 dBm		-17.5 dBm nominal	
Noise density at mixer at center frequency	(DANL + IF Gain effect) + 2.25 dB			
Data acquisition (standard 10 MHz IF path)				
Time record length				
Analysis tool				
IQ analyzer	4,000,000 IQ sample Pairs		Waveform measurement	
Advanced tools	Data packing			89600 VSA software or fast capture
	32-bit	64-bit		
Length (IQ sample pairs)	536 MSa (2 ²⁹ Sa)	268 MSa (2 ²⁸ Sa)	2 GB total memory	
Length (time units)	Samples/Sample rate (IQ pair)			
Sample rate				
IQ pairs	Span x 1.25			
ADC resolution	16 bits			

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B25 25 MHz analysis bandwidth (Option B25 is automatically included in Option B40, B85 or B1X)

IF frequency response (B25 IF path)					
IF frequency response (demodulation and FFT response relative to the center frequency)					
Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
< 3.6	10 to ≤ 25	± 0.30 dB	± 0.12 dB	± 0.05 dB	0.02 dB
3.6 to 26.5	10 to ≤ 25 preselected				0.50 dB
3.6 to 26.5	10 to ≤ 25 preselector off ¹	± 0.40 dB			0.03 dB
26.5 to 50	10 to ≤ 25 preselected				0.31 dB
26.5 to 50	10 to ≤ 25 preselector off ¹	± 0.40 dB			0.02 dB
IF phase linearity					
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)		RMS (nominal)
≥ 0.02, < 3.6	≤ 25	NA	0.48°		0.12°
≥ 3.6	≤ 25	Off ¹	0.85°		0.20°
Dynamic range (B25 IF path)					
Full scale (ADC clipping)					
Default settings, signal at CF (IF gain = Low)					
Band 0	-8 dBm mixer level nominal				
Bands 1 through 4	-7 dBm mixer level nominal				
High gain setting, signal at CF (IF gain = High)					
Band 0	-18 dBm mixer level nominal, subject to gain limitations				
Bands 1 through 4	-17 dBm mixer level nominal, subject to gain limitations				
Effect of signal frequency ≠ CF	Up to ± 3 dB nominal				
Data acquisition (B25 IF path)					
Time record length					
Analysis tool					
IQ analyzer	4,000,000 IQ sample Pairs		Waveform measurement		
Advanced tools	Data packing		89600 VSA software or fast capture		
	32-bit	64-bit			
Length (IQ sample pairs)	536 MSa (2 ²⁹ Sa)	268 MSa (2 ²⁸ Sa)	2 GB total memory		
Length (time units)	Samples/Sample rate (IQ pair)				
Sample rate					
IQ pairs	Span x 1.25				
ADC resolution	16 bits				

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth (Option B40 is automatically included in Option B85 or B1X)

IF frequency response (B40 IF path)					
IF frequency response				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)
≥ 0.03, < 3.6	≤ 40	NA	± 0.4 dB	± 0.25 dB	0.05 dB
≥ 3.6, ≤ 8.4	≤ 40	Off ¹	± 0.4 dB	± 0.16 dB	0.05 dB
> 8.4, ≤ 26.5	≤ 40	Off ¹	± 0.7 dB	± 0.20 dB	0.05 dB
≥ 26.5, < 34.4	≤ 40	Off ¹	± 0.8 dB	± 0.25 dB	0.1 dB
≥ 34.4, < 50	≤ 40	Off ¹	± 1.0 dB	± 0.35 dB	0.1 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector		Peak-to-peak (nominal)	RMS (nominal)
≥ 0.03, < 3.6	≤ 40	NA		0.16°	0.041°
≥ 3.6	≤ 40	Off ¹		1.5°	0.35°
EVM (EVM measurement floor for an 802.11g OFDM signal, using 89600B software equalization, channel estimation and data EQ)					
2.4 GHz				-52.0 dB (0.25%) nominal	
5.8 GHz with Option MPB				-49.1 dB (0.35%) nominal	
Dynamic range (B40 IF path)					
SFDR					
(Spurious-free dynamic range)					
Signal frequency within ± 12 MHz of center		-80 dBc nominal			
Signal frequency anywhere within analysis BW					
Spurious response within ± 18 MHz of center		-79 dBc nominal			
Response anywhere within analysis BW		-77 dBc nominal			
Full scale (ADC clipping)					
Default settings, signal at CF					
(IF gain = Low: IF gain offset = 0 dB)					
Band 0		-8 dBm mixer level nominal			
Bands 1 through 4		-7 dBm mixer level nominal			
High gain setting, signal at CF					
(IF gain = High)					
Band 0		-18 dBm mixer level nominal, subject to gain limitations			
Bands 1 through 4		-17 dBm mixer level nominal, subject to gain limitations			
Effect of signal frequency ≠ CF		Up to ± 3 dB nominal			

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B40 40 MHz analysis bandwidth

Data acquisition (B40 IF path)			
Time record length			
Analysis tool			
IQ analyzer	4,000,000 IQ sample pairs	Waveform measurement	
Advanced tools	Data packing		89600 VSA software or fast capture
	32-bit	64-bit	
Length (IQ sample pairs)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)	2 GB total memory
Length (time units)	Samples/Sample rate (IQ pair)		
Sample rate			
IQ pairs	Span x 1.25		
ADC resolution	12 bits		

Option B85 85 MHz or B1X 160 MHz analysis bandwidth

IF frequency response (B85 or B1X IF path)					
IF frequency response				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)
≥ 0.1, < 3.6	≤ 85	NA	± 0.6 dB	± 0.17 dB	0.05 dB
	≤ 140	NA	± 0.6 dB	± 0.25 dB	0.05 dB
	≤ 160	NA		± 0.2 dB (nom)	0.07 dB
≥ 3.6, ≤ 8.4	≤ 85	Off ¹	± 0.73 dB	± 0.2 dB	0.05 dB
	≤ 140	Off ¹	± 0.8 dB	± 0.35 dB	0.05 dB
	≤ 160	Off ¹		± 0.3 dB (nom)	0.07 dB
> 8.4, ≤ 26.5	≤ 85	Off ¹	± 1.10 dB	± 0.50 dB	0.1 dB
	≤ 140	Off ¹	± 1.30 dB	± 0.75 dB	0.1 dB
	≤ 160	Off ¹		± 0.5 dB (nom)	0.12 dB
≥ 26.5, ≤ 50	≤ 85	Off ¹	± 1.20 dB	± 0.45 dB	0.12 dB
	≤ 140	Off ¹	± 1.40 dB	± 0.65 dB	0.12 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector		Peak-to-peak (nominal)	RMS (nominal)
≥ 0.03, < 3.6	≤ 140	NA		0.9°	0.20°
≥ 3.6,	≤ 160	NA		1.7°	0.42°
	≤ 140	Off ¹		1.6°	0.39°
	≤ 160	Off ¹		2.8°	0.64°
EVM (EVM measurement floor)		Customized settings required, preselector bypassed (Option MPB) above Band 0			
Case 1: 62.5 Msymbol/s, 16QAM signal, RRC filter alpha of 0.2, non-equalized, with approximately 75 MHz occupied bandwidth					
Band 0, 1.8 GHz		0.8% nominal			
Band 1, 5.95 GHz		1.1% nominal			
Case 2: 104.167 Msymbol/s, 16QAM signal, RRC filter alpha of 0.35, non-equalized, with approximately 140 MHz occupied bandwidth					
Band 1, 5.95 GHz		3.0% nominal, (unequalized)		0.5% nominal, (equalized)	
Band 2, 15.3 GHz		2.5% nominal, (unequalized)		0.6% nominal, (equalized)	
Band 4, 26 GHz		3.5% nominal, (unequalized)		1.6% nominal, (equalized)	
Effect of signal frequency ≠ CF		Up to ± 3 dB nominal			

1. Option MPB is installed and enabled.

I/Q Analyzer (continued)

Option B85 85 MHz or B1X 160 MHz analysis bandwidth

Dynamic range (B85 or B1X IF path)		
SFDR (Spurious-free dynamic range)		
Signal frequency within ± 12 MHz of center	-75 dBc nominal	
Signal frequency anywhere within analysis BW		
Spurious response within ± 63 MHz of center	-74 dBc nominal	
Response anywhere within analysis BW	-72 dBc nominal	
Full scale (ADC clipping)		
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)		
Band 0	-8 dBm mixer level nominal	
Band 1 through 4	-7 dBm mixer level nominal	
High gain setting, signal at CF (IF gain = High)		
Band 0	-18 dBm mixer level nominal, subject to gain limitations	
Band 1 through 4	-17 dBm mixer level nominal, subject to gain limitations	
Effect of signal frequency \neq CF	Up to ± 3 dB nominal	
Data acquisition (B85 or B1X IF path)		
Time record length		
Analysis tool		
IQ analyzer	4,000,000 IQ sample pairs	Waveform measurement
Advanced tools	Data packing	89600 VSA software or fast capture
	32-bit	
Length (IQ sample pairs)	536 MSa (2^{29} Sa)	268 MSa (2^{28} Sa)
Length (time units)	Samples/Sample rate (IQ pair)	
Sample rate		
IQ pairs	Span x 1.25	
ADC resolution	14 bits	

Real-time spectrum analyzer (RTSA) ¹

Option RT1 or RT2

Real-time analysis		
Real-time analysis bandwidth		
Option RT1	Up to 160 MHz	Analysis BW option determines the max real-time bandwidth
Option RT2	Up to 160 MHz	Analysis BW option determines the max real-time bandwidth
Minimum detectable signal duration with > 60 dB StM ² ratio		
Option RT1	11.42 ns	
Option RT2	5.0 ns	
Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy		
For Frequency Mask Triggering (FMT)		
Option RT1	17.3 μ s	Signal is at mask level
Option RT2	3.57 μ s	Signal is at mask level
Minimum acquisition time	100 μ s	
FFT rate	292,969/s	

1. For additional RTSA specifications, please refer to Option RT1/RT2 Chapter in the N9030A PXA Signal Analyzer specifications guide

2. StM = "Signal-to-Mask"

Related Literature

Keysight PXA signal analyzers	
Brochure	5990-3951EN
Configuration guide	5990-3953EN

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000® is a registered certification mark of the Telecommunications Industry Association.

www.keysight.com/find/N9030A

www.keysight.com/find/PXA

www.keysight.com/find/xseries_apps

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

This information is subject to change without notice.
© Keysight Technologies, 2013 - 2018
Published in USA, March 26, 2018
5990-3952EN
www.keysight.com